



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China
Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5678
ee.shanghai@sgs.com

Report No.: SHEM180700591901
Page: 1 of 38

TEST REPORT

Application No.: SHEM1807005919HS
Applicant:
Address of Applicant:
Manufacturer:
Address of Manufacturer:
Factory:
Address of Factory:
Equipment Under Test (EUT):
EUT Name: Hair Clipper
Model No.: 908,009,606,607,608,609,809,919,989,2200,SINBO,SHC4348,2014,
GL-2017,GL-2018,GL-2028,GL-2038,GL2015,GL-2078 □
□ Please refer to section 2 of this report which indicates which model was
actually tested and which were electrically identical.
Standards: EN 55014-1:2017, EN 61000-3-2:2014
EN 61000-3-3:2013, EN 55014-2:2015
Date of Receipt: 2018-07-23
Date of Test: 2018-07-26 to 2018-07-31
Date of Issue: 2018-08-07

Test Result :	Pass*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.



Parlam Zhan
E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.





**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

Report No.: SHEM180700591901

Page: 2 of 38

Revision Record			
Version	Description	Date	Remark
00	Original	2018-08-07	/

Authorized for issue by:			
			
		<hr/>	<hr/>
		Andy_yang /Project Engineer	
			
		<hr/>	<hr/>
		Zenger_zhang /Reviewer	



2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	EN 55014-1:2017	CISPR 16-2-1	N/A	Pass
Radiated Emissions (30MHz-1GHz)	EN 55014-1:2017	CISPR 16-2-3	N/A	Pass
Harmonic Current Emission	EN 61000-3-2:2014	EN 61000-3-2:2014	Class A	N/A*
Voltage Fluctuations and Flicker	EN 61000-3-3:2013	EN 61000-3-3:2013	Clause 5 of EN 61000-3-3	Pass
Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN 55014-2:2015	EN 61000-4-2:2009	4kV Contact Discharge 8kV Air Discharge	Pass
Radiated Immunity (80MHz-1GHz)	EN 55014-2:2015	EN 61000-4-3:2006 +A1:2008+A2:2010	3V/m, 80%, 1kHz Amp. Mod.	Pass
Electrical Fast Transients/Burst at Power Port	EN 55014-2:2015	EN 61000-4-4:2012	1kV 5/50ns Tr/Td 5kHz Repetition Frequency	Pass
Surge at Power Port	EN 55014-2:2015	EN 61000-4-5:2014	1.2/50µs Tr/Td 1kV Line to Line 2kV Line to Ground	Pass
Voltage Dips and Interruptions	EN 55014-2:2015	EN 61000-4-11:2004	For 50Hz: 0 % UT for 0.5per 40 % UT for 10per 70 % UT for 25per For 60Hz: 0 % UT for 0.5per 40 % UT for 12per 70 % UT for 30per	Pass
Conducted Immunity at Power Port (150kHz-230MHz)	EN 55014-2:2015	EN 61000-4-6:2014	3Vrms (emf),80%,1kHz Amp. Mod.	Pass

N/A: Not applicable

N/A*: Please refer to section 6.3 of this report for more details.

Note: Declaration of EUT Family Grouping:

There are series models mentioned in this report and they are the similar in electrical and electronic characters. Only the model 908 was tested since their differences are model number and appearance.



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION.....	6
4.1 DETAILS OF E.U.T.	6
4.2 DESCRIPTION OF SUPPORT UNITS.....	6
4.3 MEASUREMENT UNCERTAINTY.....	6
4.4 TEST LOCATION.....	7
4.5 TEST FACILITY	7
4.6 DEVIATION FROM STANDARDS.....	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
4.8 MONITORING OF EUT FOR ALL IMMUNITY TEST	7
5 EQUIPMENT LIST.....	8
6 EMISSION TEST RESULTS.....	11
6.1 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz)	11
6.1.1 E.U.T. Operation.....	11
6.1.2 Test Setup Diagram.....	11
6.1.3 Measurement Data.....	11
6.2 RADIATED EMISSIONS (30MHz-1GHz)	14
6.2.1 E.U.T. Operation.....	14
6.2.2 Test Setup Diagram.....	14
6.2.3 Measurement Data.....	14
6.3 HARMONIC CURRENT EMISSION	19
6.4 VOLTAGE FLUCTUATIONS AND FLICKER	20
6.4.1 E.U.T. Operation.....	20
6.4.2 Test Setup Diagram.....	20
6.4.3 Measurement Data.....	20
7 IMMUNITY TEST RESULTS	21
7.1 PERFORMANCE CRITERIA DESCRIPTION IN EN 55014-2:2015	21
7.2 ELECTROSTATIC DISCHARGE	22
7.2.1 Test Setup Diagram.....	22
7.2.2 E.U.T. Operation.....	22
7.2.3 Test Results:.....	22
7.3 RADIATED IMMUNITY (80MHz-1GHz).....	23
7.3.1 Test Setup Diagram.....	23
7.3.2 E.U.T. Operation.....	23
7.3.3 Test Results:.....	23
7.4 ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT.....	24
7.4.1 Test Setup Diagram.....	24
7.4.2 E.U.T. Operation.....	24
7.4.3 Test Results:.....	24
7.5 SURGE AT POWER PORT.....	25
7.5.1 Test Setup Diagram.....	25
7.5.2 E.U.T. Operation.....	25



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 5 of 38

7.5.3	Test Results:	25
7.6	VOLTAGE DIPS AND INTERRUPTIONS	26
7.6.1	Test Setup Diagram	26
7.6.2	E.U.T. Operation	26
7.6.3	Test Results:	26
7.7	CONDUCTED IMMUNITY AT POWER PORT (150kHz-230MHz)	27
7.7.1	Test Setup Diagram	27
7.7.2	E.U.T. Operation	27
7.7.3	Test Results:	27
8	PHOTOGRAPHS	28
8.1	CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) TEST SETUP	28
8.2	RADIATED EMISSIONS (30MHz-1GHz) TEST SETUP	28
8.3	HARMONIC & VOLTAGE FLUCTUATIONS AND FLICKER TEST SETUP	29
8.4	ELECTROSTATIC DISCHARGE TEST SETUP	30
8.5	RADIATED IMMUNITY (80MHz-1GHz) TEST SETUP	31
8.6	ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT TEST SETUP	32
8.7	SURGE AT POWER PORT TEST SETUP	32
8.8	VOLTAGE DIPS AND INTERRUPTIONS TEST SETUP	33
8.9	CONDUCTED IMMUNITY AT POWER PORT (150kHz-230MHz) TEST SETUP	33
8.10	EUT CONSTRUCTIONAL DETAILS	34-38



4 General Information

4.1 Details of E.U.T.

Power supply: For running mode: DC 1.2V
For charging:
Input: 100-240V 50/60Hz
Output: DC 3V 200mA

Test voltage: AC 230V; DC 1.2V

Cable: DC cable 1.65m

4.2 Description of Support Units

None.

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission at mains port using AMN	3.2dB (9kHz to 150kHz)
		3.0dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	1.9 dB(9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	2.4 dB(150kHz to 30MHz)
4	Radiated Power	3.5dB
5	Radiated emission	4.4dB (30MHz-1GHz)
		4.6dB (1GHz-6GHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



4.4 Test Location

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

Tests were sub-contracted.

Ningbo Joysun Product Testing Service Co., Ltd.

No. 66, Qingyi Road, Hi-Tech Distric, Ningbo, Zhejiang, China

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **NVLAP (Certificate No. 201034-0)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program(NVLAP). Certificate No. 201034-0.

- **FCC –Designation Number: CN5033**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

Designation Number: CN5033. Test Firm Registration Number: 479755.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

4.8 Monitoring of EUT for All Immunity Test

Visual: Working Status of the EUT



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 8 of 38

5 Equipment List

CE

Equipment	Model No	Inventory No	Manufacturer	Cal Due Date
EMI receiver	ESCI	100708	R&S	2019/2/23
Artificial mains network	ENV216	101022	R&S	2019/2/23
Artificial mains network	ESH2-Z5	100198	R&S	2019/2/23
Pulse Limiter	ESH3-Z2	100847	R&S	2019/2/23
Control Room2	(11.2*5.2*3.3)		Albatross	2020/3/2

RE

Equipment	Model No	Inventory No	Manufacturer	Cal Due Date
EMI receiver	ESU26	100224	R&S	2019/2/23
Combined antenna	VULB 9163	9163-563	SCHWARZBECK	2019/2/23
Horn antenna	HF907	100147	R&S	2019/2/23
Preamplifier	SCU18	10042	R&S	2019/2/23
Semi -Anechoic Chamber	3M (9.1*5.8*5.7)		Albatross	2019/10/8
EMI receiver	ESR 7	101203	R&S	2019/2/23
Combined antenna	VULB 9163	9163-560	SCHWARZBECK	2019/2/23
Semi -Anechoic Chamber	5M (12.1*7.3*6)		Albatross	2020/3/2

Voltage Fluctuations and Flicker

Equipment	Model No	Inventory No	Manufacturer	Cal Due Date
Harmonic and flicker test system	DPA500	V0746103124	EM TEST	2019/2/23
AC Power Source	500lix-400-413	58311	CI	2019/2/23
Shielding Room1	(10*6.1*3.3)		Albatross	2020/3/2
Harmonic and flicker test system(3phase)	DPA503	V0828104013	EM TEST	2019/2/23
AC Power Source	61705	617050000124	Chroma	2019/2/23
Shielding Room2	(10*4.9*3.0)		Albatross	2020/3/2

ESD

Equipment	Model No	Inventory No	Manufacturer	Cal Due Date
ESD gun	dito	DITO B07040	EM TEST	2019/2/23



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 9 of 38

EFT

Equipment	Model No	Inventory No	Manufacturer	Cal Due Date
Surge, Burst and Dip test system	UCS500-M6B	V0746103125	EM TEST	2019/2/23
booster	MV2616	V0746103126	EM TEST	2019/2/23
Coupling clamp	HFK	0108-27	EM TEST	2019/2/23
Shielding Room2	(10*4.9*3.0)		Albatross	2020/3/2

Surge

Equipment	Model No	Inventory No	Manufacturer	Cal Due Date
Surge, Burst and Dip test system	UCS500-M6B	V0746103125	EM TEST	2019/2/23
booster	MV2616	V0746103126	EM TEST	2019/2/23
Shielding Room2	(10*4.9*3.0)		Albatross	2020/3/2

CI

Equipment	Model No	Inventory No	Manufacturer	Cal Due Date
Attenuator	75-A-FFN-06	141733	BIRD	2019/2/23
CDN for Two/Three Supply Main Line	FCC-801-M2/M3-16A	7079	FISCHER	2019/2/23
CDN for Two/Three Supply Main Line	CDN-M2+3	A2210412/2016	Frankonia	2019/2/23
Coupling/Decoupling Network	DC2600M2	327429	AR	2019/2/23
Decoupling network	F-203I-23MM-DCN	8225	FISCHER	2019/2/23
EM injection clamp	F-203I-23MM	8562	FISCHER	2019/2/23
POWER AMPLIFIER	75A250A	327549	AR	2019/2/23
Integrated measurement system	IMS	100012	R&S	2019/2/23
Smart sensor technology	NRP-Z91	100520	R&S	2019/2/23
Control Room1	(11.2*5.2*3.3)		Albatross	2020/3/2
Conduct Immunity Test System	CIT-10-75	126B1413/2016	Frankonia	2019/2/23
Shielding Room2	(10*4.9*3.0)		Albatross	2020/3/2



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 10 of 38

Dips

Equipment	Model No	Inventory No	Manufacturer	Cal Due Date
Surge, Burst and Dip test system	UCS500-M6B	V0746103125	EM TEST	2019/2/23
booster	MV2616	V0746103126	EM TEST	2019/2/23
Shielding Room2	(10*4.9*3.0)		Albatross	2020/3/2

RI

Equipment	Model No	Inventory No	Manufacturer	Cal Due Date
Semi -Anechoic Chamber	3M (9.1*5.8*5.7)		Albatross	2019/10/8
LOGPERIODIC ANTENNA	AT1080	325189	AR	2019/2/23
Horn antenna	AT4002A	328236	AR	2019/2/23
Coupling/Decoupling Network	DC6180M1	328058	AR	2019/2/23
Coupling/Decoupling Network	DC7144M1	327100	AR	2019/2/23
POWER AMPLIFIER	250W1000A	327579	AR	2019/2/23
POWER AMPLIFIER	80S1G3	327495	AR	2019/2/23
Integrated measurement system	IMS	100012	R&S	2019/2/23
Smart sensor technology	NRP-Z91	100520	R&S	2019/2/23



6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement:	EN 55014-1:2017
Test Method:	CISPR 16-2-1
Frequency Range:	150kHz to 30MHz
Limit:	
0.15M-0.5MHz	66dB(μV)-56dB(μV) quasi-peak, 59dB(μV)-46dB(μV) average
0.5M-5MHz	56dB(μV) quasi-peak, 46dB(μV) average
5M-30MHz	60dB(μV) quasi-peak, 50dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz


6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode: a:Charging mode: Keep EUT charging continuously.

6.1.2 Test Setup Diagram

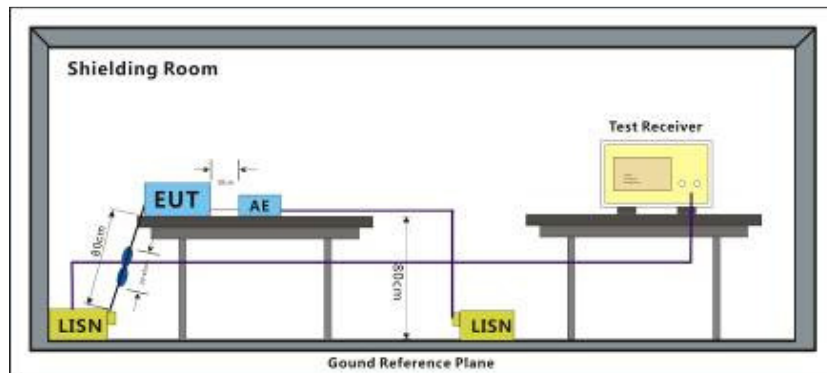

6.1.3 Measurement Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Notes: Emission Level=Read Level + LISN Factor + Cable Loss




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 12 of 38

Mode:a; Line:Live Line

Voltage with 2-Line-LISN

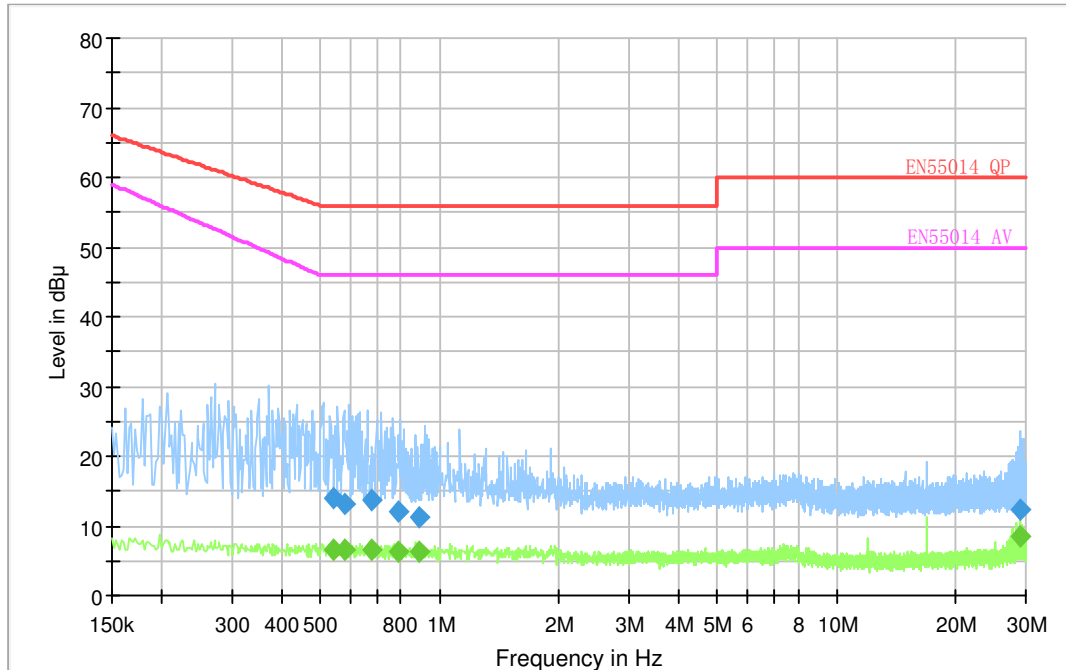

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.539000	13.9	1000.0	9.000	Off	L1	10.8	42.1	56.0	
0.579000	13.1	1000.0	9.000	Off	L1	10.8	42.9	56.0	
0.676000	13.7	1000.0	9.000	Off	L1	10.8	42.3	56.0	
0.789000	12.0	1000.0	9.000	Off	L1	10.7	44.0	56.0	
0.891000	11.3	1000.0	9.000	Off	L1	10.8	44.7	56.0	
29.047000	12.3	1000.0	9.000	Off	L1	11.0	47.7	60.0	

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.539000	6.6	1000.0	9.000	Off	L1	10.8	39.4	46.0	
0.579000	6.5	1000.0	9.000	Off	L1	10.8	39.5	46.0	
0.676000	6.5	1000.0	9.000	Off	L1	10.8	39.5	46.0	
0.789000	6.3	1000.0	9.000	Off	L1	10.8	39.7	46.0	
0.891000	6.4	1000.0	9.000	Off	L1	10.8	39.6	46.0	
29.047000	8.4	1000.0	9.000	Off	L1	11.0	41.6	50.0	




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 13 of 38

Mode:a; Line:Neutral Line

Voltage with 2-Line-LISN

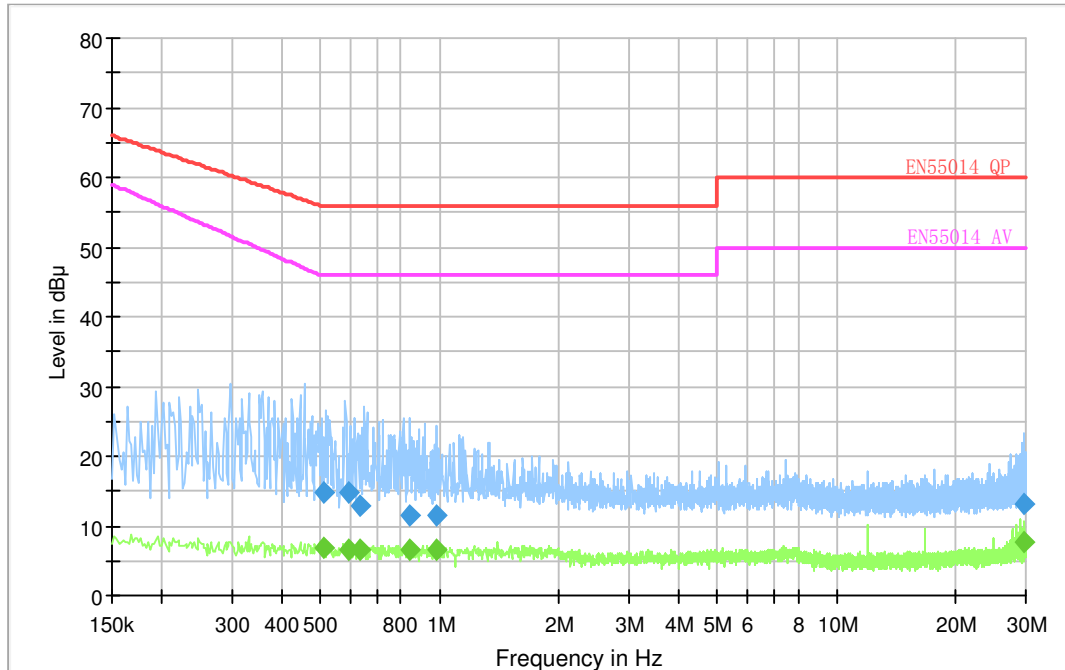

Final Result1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.512000	14.8	1000.0	9.000	Off	N	10.8	41.2	56.0	
0.589000	14.9	1000.0	9.000	Off	N	10.8	41.1	56.0	
0.632000	13.0	1000.0	9.000	Off	N	10.8	43.0	56.0	
0.841000	11.6	1000.0	9.000	Off	N	10.8	44.4	56.0	
0.988000	11.6	1000.0	9.000	Off	N	10.7	44.4	56.0	
29.831000	13.1	1000.0	9.000	Off	N	11.2	46.9	60.0	

Final Result2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.512000	6.8	1000.0	9.000	Off	N	10.8	39.2	46.0	
0.589000	6.6	1000.0	9.000	Off	N	10.8	39.4	46.0	
0.632000	6.7	1000.0	9.000	Off	N	10.7	39.3	46.0	
0.841000	6.6	1000.0	9.000	Off	N	10.8	39.4	46.0	
0.988000	6.6	1000.0	9.000	Off	N	10.8	39.4	46.0	
29.831000	7.7	1000.0	9.000	Off	N	11.2	42.3	50.0	

6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement:	EN 55014-1:2017
Test Method:	CISPR 16-2-3
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Limit:	
30MHz-230MHz	40 dB(μV/m) quasi-peak
230MHz-1GHz	47 dB(μV/m) quasi-peak
Detector:	Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz

6.2.1 E.U.T. Operation


Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

a:Charging mode: Keep EUT charging continuously.

Test mode: b:Running mode_Keep the EUT running continuously.

6.2.2 Test Setup Diagram

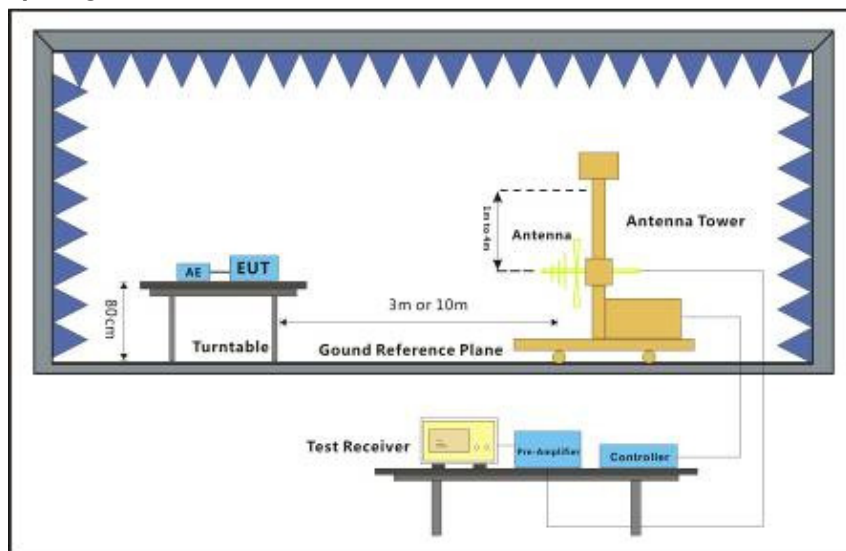

6.2.3 Measurement Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Notes: Emission Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 15 of 38

Mode:a; Polarization:Horizontal

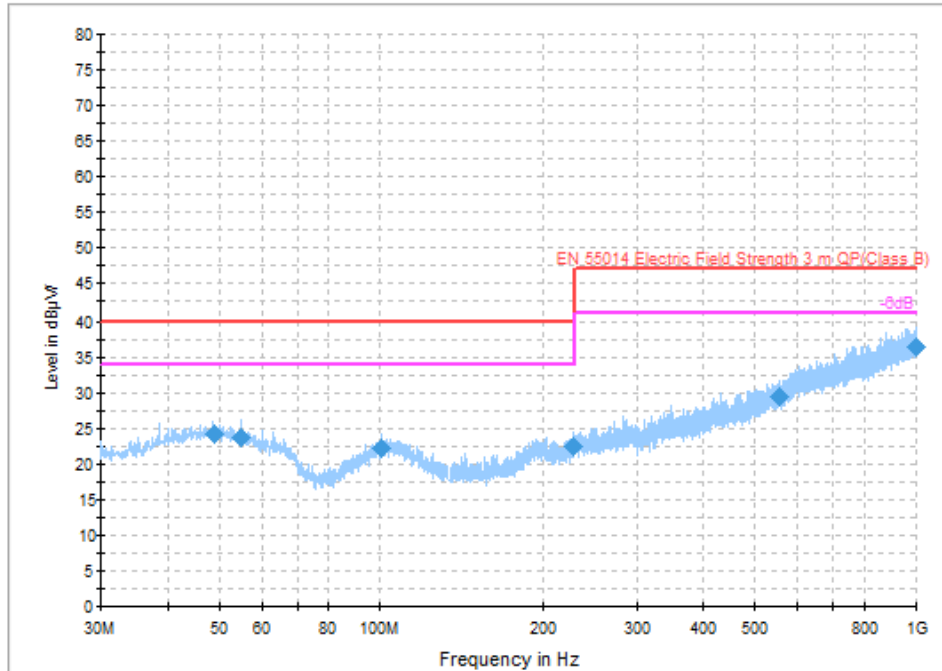

Final Result 1

Frequency (MHz)	QuasiPeak (dB µ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB µ V/m)
48.901000	24.1	1000.0	120.000	300.0	H	119.0	15.5	15.9	40.0
54.846000	23.6	1000.0	120.000	119.0	H	74.0	15.1	16.4	40.0
100.522000	22.1	1000.0	120.000	300.0	H	102.0	13.6	17.9	40.0
229.030000	22.5	1000.0	120.000	163.0	H	186.0	13.8	17.5	40.0
555.258000	29.5	1000.0	120.000	191.0	H	48.0	20.2	17.5	47.0
997.130000	36.4	1000.0	120.000	100.0	H	160.0	25.9	10.6	47.0




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 16 of 38

Mode:a; Polarization:Vertical

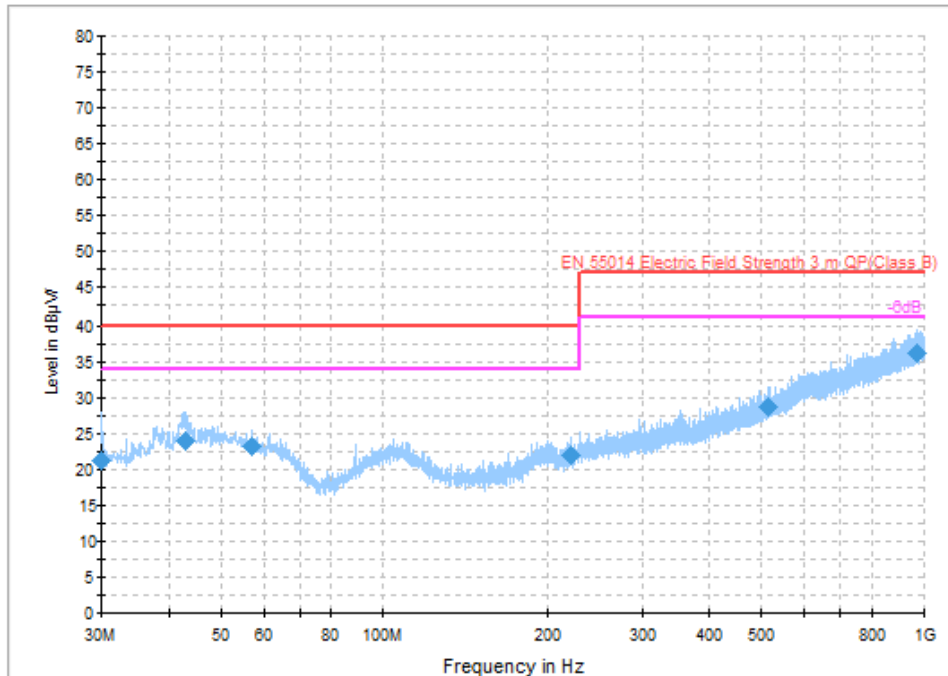

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
30.020000	21.2	1000.0	120.000	119.0	V	-24.0	12.4	18.8	40.0
42.935000	23.9	1000.0	120.000	133.0	V	205.0	15.2	16.1	40.0
56.903000	23.1	1000.0	120.000	176.0	V	189.0	14.5	16.9	40.0
221.929000	22.0	1000.0	120.000	134.0	V	158.0	13.3	18.0	40.0
512.147000	28.8	1000.0	120.000	133.0	V	40.0	19.6	18.2	47.0
968.435000	36.0	1000.0	120.000	200.0	V	286.0	25.6	11.0	47.0




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 17 of 38

Mode:b; Polarization:Horizontal

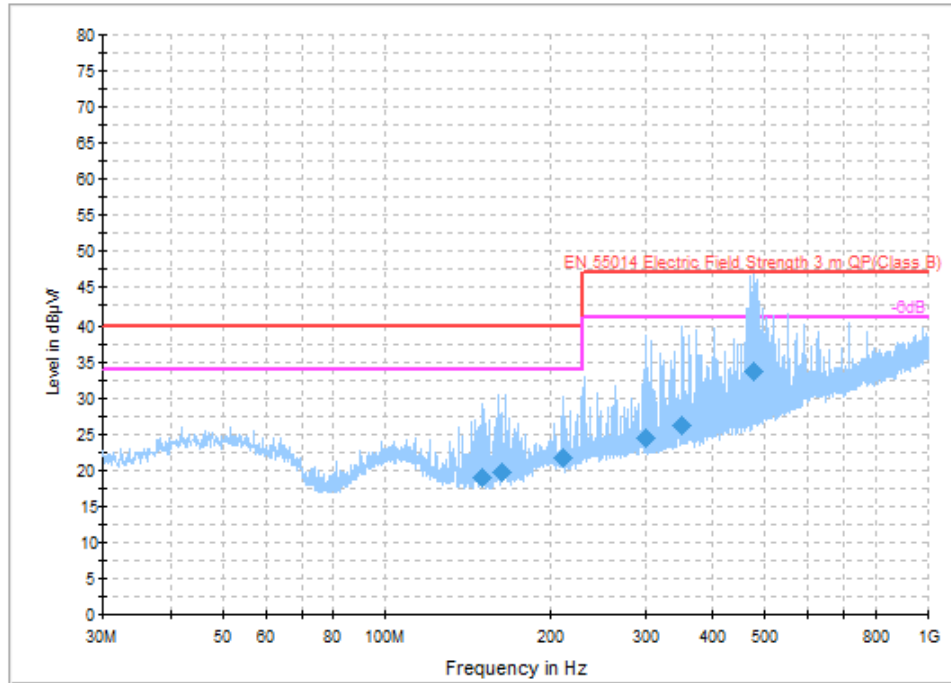

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
149.461000	18.8	1000.0	120.000	134.0	H	274.0	10.0	21.2	40.0
163.238000	19.6	1000.0	120.000	100.0	H	67.0	10.6	20.4	40.0
211.627000	21.7	1000.0	120.000	100.0	H	253.0	12.9	18.3	40.0
301.272000	24.4	1000.0	120.000	100.0	H	75.0	15.3	22.6	47.0
349.946000	26.2	1000.0	120.000	100.0	H	268.0	17.0	20.8	47.0
476.845000	33.7	1000.0	120.000	100.0	H	85.0	18.8	13.3	47.0



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901
Page: 18 of 38

Mode:b; Polarization:Vertical

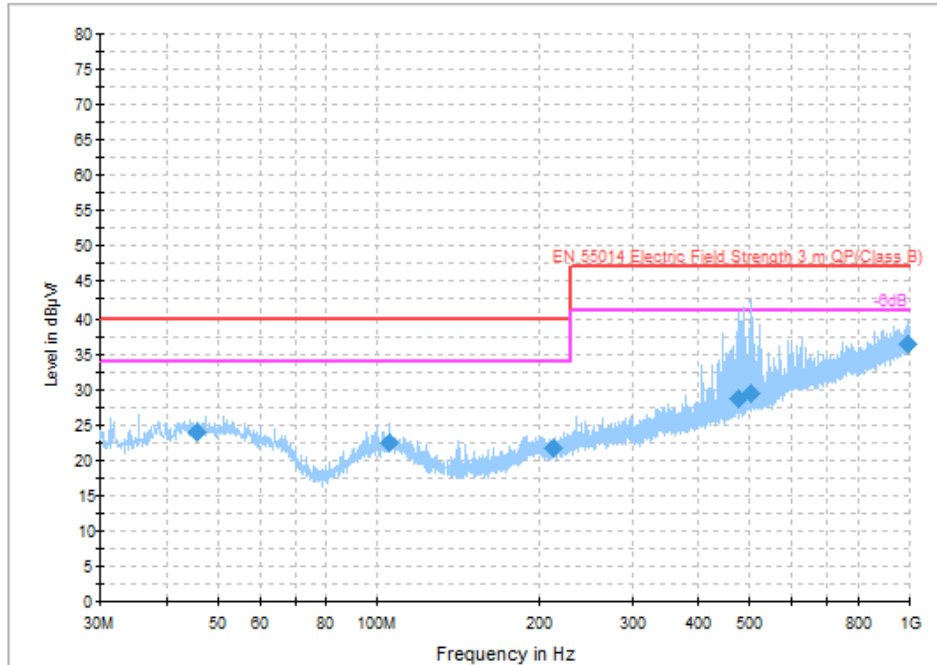

Final Result 1

Frequency (MHz)	QuasiPeak (dB µ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB µ V/m)
45.697000	23.9	1000.0	120.000	134.0	V	265.0	15.4	16.1	40.0
105.209000	22.4	1000.0	120.000	176.0	V	75.0	13.8	17.6	40.0
213.598000	21.7	1000.0	120.000	200.0	V	294.0	12.9	18.3	40.0
477.253000	28.6	1000.0	120.000	192.0	V	181.0	18.9	18.4	47.0
503.531000	29.3	1000.0	120.000	147.0	V	14.0	19.4	17.7	47.0
995.407000	36.3	1000.0	120.000	264.0	V	250.0	25.9	10.7	47.0



6.3 Harmonic Current Emission

Test Requirement: EN 61000-3-2:2014

Test Method: EN 61000-3-2:2014

Frequency Range: 100Hz to 2kHz

There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2.

For further details, please refer to Clause 7 of EN 61000-3-2 which states:

"For the following categories of equipment, limits are not specified in this standard.

- equipment with a rated power of 75W or less, other than lighting equipment"



6.4 Voltage Fluctuations and Flicker

Test Requirement: EN 61000-3-3:2013

Test Method: EN 61000-3-3:2013


6.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1003 mbar

Test mode: a:Charging mode: Keep EUT charging continuously.

6.4.2 Test Setup Diagram

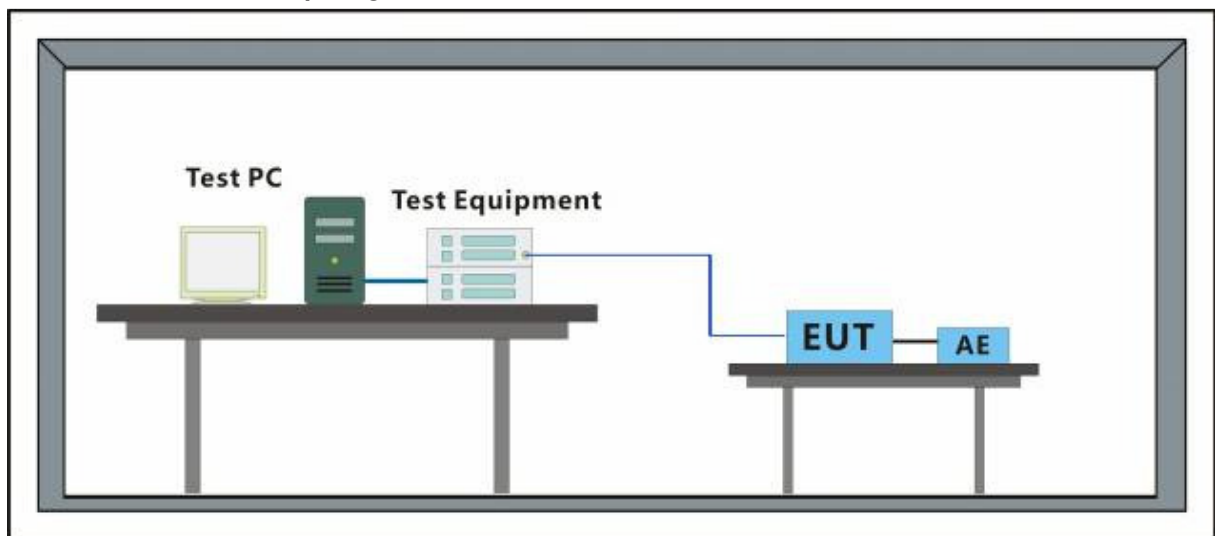

6.4.3 Measurement Data

Mode:a

Maximum Flicker results

	EUT values	Limit	Result
Pst	0.028	1.00	PASS
dc [%]	0.004	3.30	PASS
dmax [%]	0.273	7.00	PASS
dt [s]	0.000	0.50	PASS



7 Immunity Test Results

7.1 Performance Criteria Description in EN 55014-2:2015


Criterion A	The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
Criterion B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and from what the user may reasonably expect from the apparatus if used as intended.
Criterion C	Temporary loss of function is allowed, provided the function is self recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.



7.2 Electrostatic Discharge

Test Requirement: EN 55014-2:2015
Test Method: EN 61000-4-2:2009
Performance Criterion: B
Discharge Impedance: 330Ω/150pF
Number of Discharge: Minimum 10 times at each test point
Discharge Mode: Single Discharge
Discharge Period: 1 second minimum

7.2.1 Test Setup Diagram

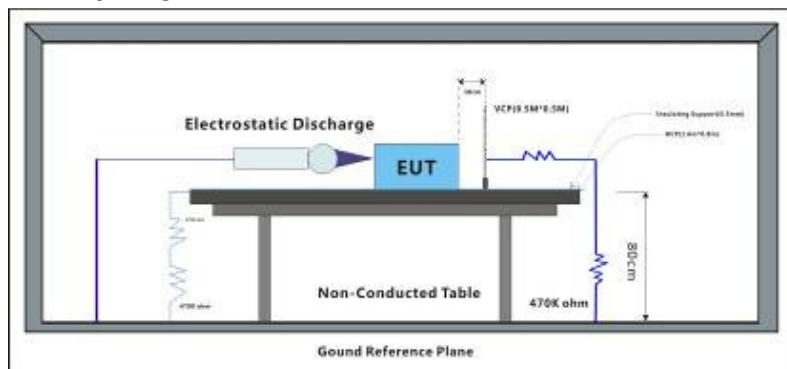

7.2.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:Charging mode: Keep EUT charging continuously.
b:Running mode_Keep the EUT running continuously.

7.2.3 Test Results:

Observations: Test Point:

1. All insulated enclosure and seams.
2. All accessible metal parts of the enclosure.
3. All side

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	8	+	1	A
Air Discharge	8	-	1	A
Contact Discharge	4	+	2	A
Contact Discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A


Results:

A: No degradation in the performance of the EUT was observed.

7.3 Radiated Immunity (80MHz-1GHz)

Test Requirement: EN 55014-2:2015
 Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010
 Performance Criterion: A
 Frequency Range: 80MHz to 1GHz
 Antenna Polarisation: Vertical and Horizontal
 Modulation: 1kHz, 80% Amp. Mod, 1% increment

7.3.1 Test Setup Diagram

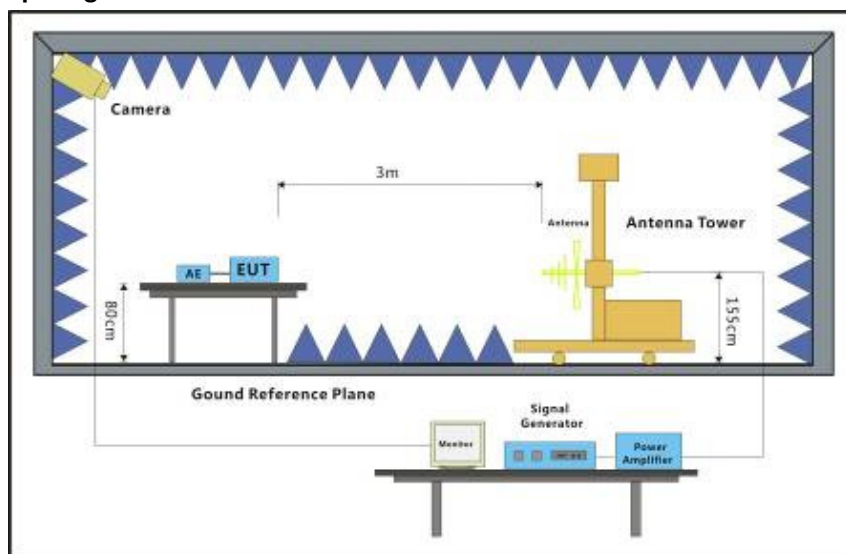

7.3.2 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode:
 a: Charging mode: Keep EUT charging continuously.
 b: Running mode: Keep the EUT running continuously.

7.3.3 Test Results:

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	3	Front	2s	A
80MHz-1GHz	3	Back	2s	A
80MHz-1GHz	3	Left	2s	A
80MHz-1GHz	3	Right	2s	A
80MHz-1GHz	3	Top	2s	A
80MHz-1GHz	3	Underside	2s	A


Results:

A: No degradation in the performance of the EUT was observed.

7.4 Electrical Fast Transients/Burst at Power Port

Test Requirement: EN 55014-2:2015
 Test Method: EN 61000-4-4:2012
 Performance Criterion: B
 Repetition Frequency: 5kHz
 Burst Period: 300ms
 Test Duration: 2 minute per level & polarity

7.4.1 Test Setup Diagram

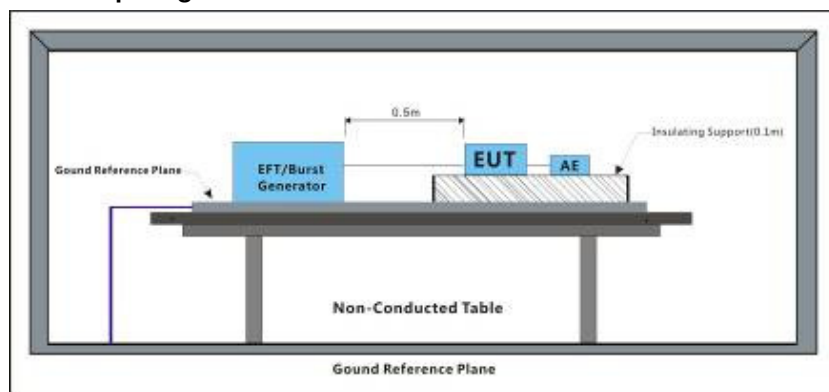

7.4.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:Charging mode: Keep EUT charging continuously.

7.4.3 Test Results:

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A

Results:


A: No degradation in the performance of the EUT was observed.



7.5 Surge at Power Port

Test Requirement: EN 55014-2:2015
Test Method: EN 61000-4-5:2014
Performance Criterion: B
Interval: 60s between each surge
No. of surges: 5 positive at 90°, 5 negative at 270°.

7.5.1 Test Setup Diagram

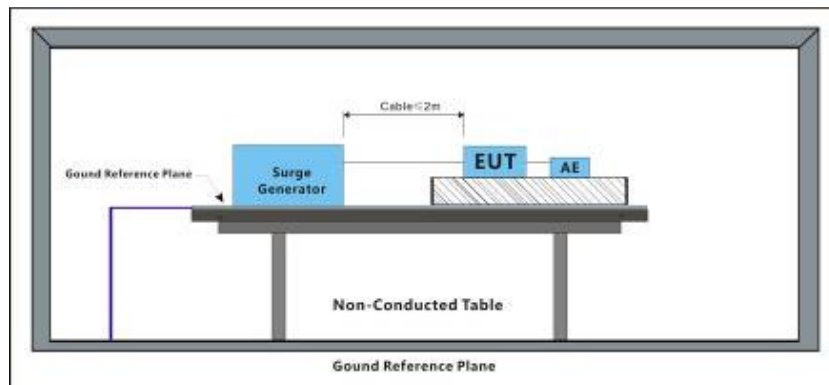

7.5.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:Charging mode: Keep EUT charging continuously.

7.5.3 Test Results:

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1	+	90°	A
L-N	1	-	270°	A

Results:

A: No degradation in the performance of the EUT was observed.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.


Report No.: SHEM180700591901

Page: 26 of 38

7.6 Voltage Dips and Interruptions

Test Requirement: EN 55014-2:2015
Test Method: EN 61000-4-11:2004
Performance Criterion: For 50Hz:
0% of UT (Rated Voltage) for 0.5 Cycle: C;
40% of UT for 10 Cycle: C;
70% of UT for 25 Cycle: C
For 60Hz:
0% of UT (Rated Voltage) for 0.5 Cycle: C;
40% of UT for 12 Cycle: C;
70% of UT for 30 Cycle: C
No. of Dips / Interruptions: 3 per Level
Time between dropout 10s

7.6.1 Test Setup Diagram

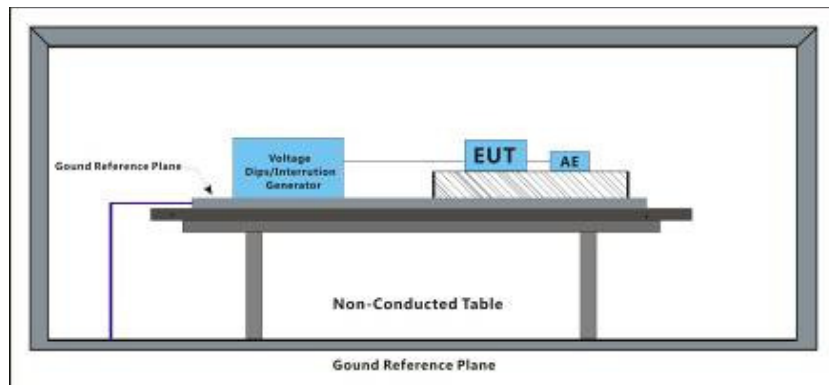

7.6.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 51 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:Charging mode: Keep EUT charging continuously.

7.6.3 Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
0	0°	0.5 Cycles	3	A
0	180°	0.5 Cycles	3	A
40	0°	10 Cycles	3	A
40	180°	10 Cycles	3	A
70	0°	25 Cycles	3	A
70	180°	25 Cycles	3	A


Results:

A: No degradation in the performance of the EUT was observed.

7.7 Conducted Immunity at Power Port (150kHz-230MHz)

Test Requirement: EN 55014-2:2015
Test Method: EN 61000-4-6:2014
Performance Criterion: A
Frequency Range: 0.15MHz to 230MHz
Modulation: 80%, 1kHz Amplitude Modulation
Step Size: 1%

7.7.1 Test Setup Diagram

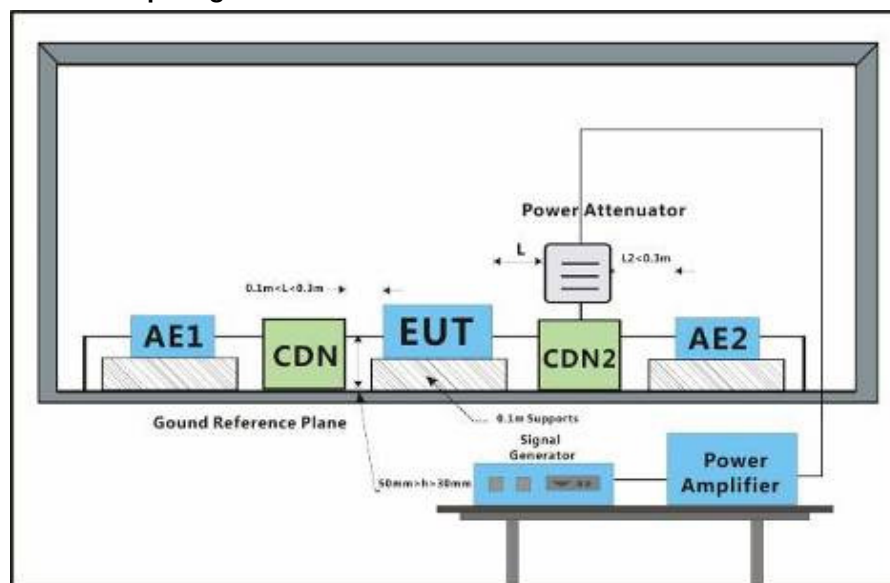

7.7.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode: a:Charging mode: Keep EUT charging continuously.

7.7.3 Test Results:

Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	3	CDN	2s	A


Results:

A: No degradation in the performance of the EUT was observed.




8 Photographs

8.1 Conducted Emissions at Mains Terminals (150kHz-30MHz) Test Setup

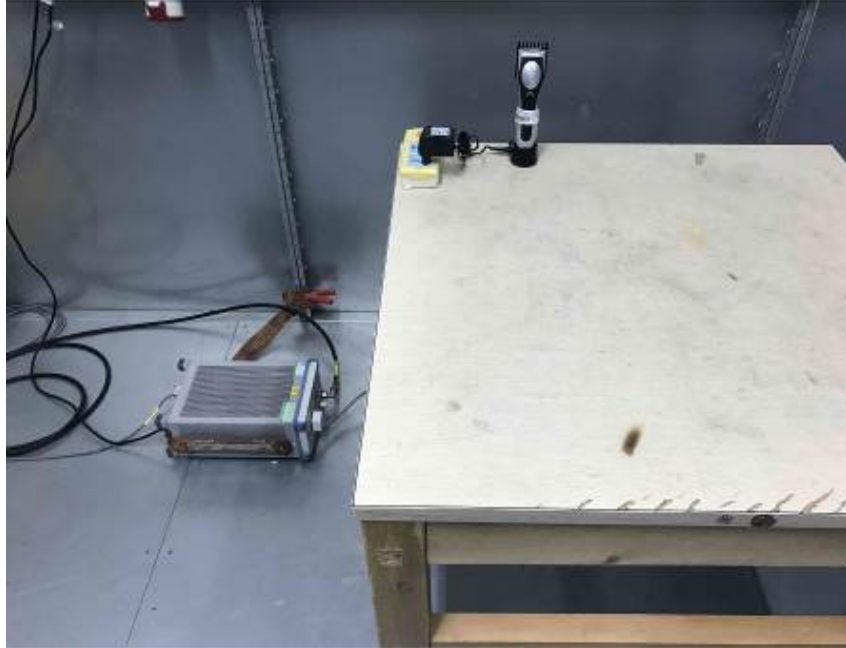

8.2 Radiated Emissions (30MHz-1GHz) Test Setup

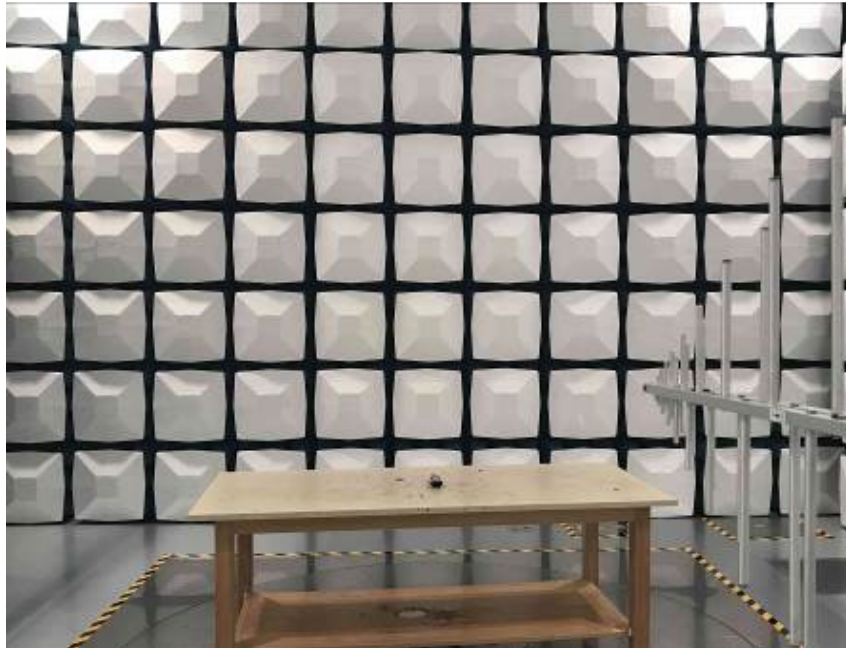



8.3 Harmonic & Voltage Fluctuations and Flicker Test Setup





8.4 Electrostatic Discharge Test Setup





8.5 Radiated Immunity (80MHz-1GHz) Test Setup





8.6 Electrical Fast Transients/Burst at Power Port Test Setup



8.7 Surge at Power Port Test Setup





8.8 Voltage Dips and Interruptions Test Setup



8.9 Conducted Immunity at Power Port (150kHz-230MHz) Test Setup





8.10 EUT Constructional Details





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM180700591901

Page: 35 of 38





**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**


Report No.: SHEM180700591901
Page: 36 of 38





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.


Report No.: SHEM180700591901
Page: 37 of 38

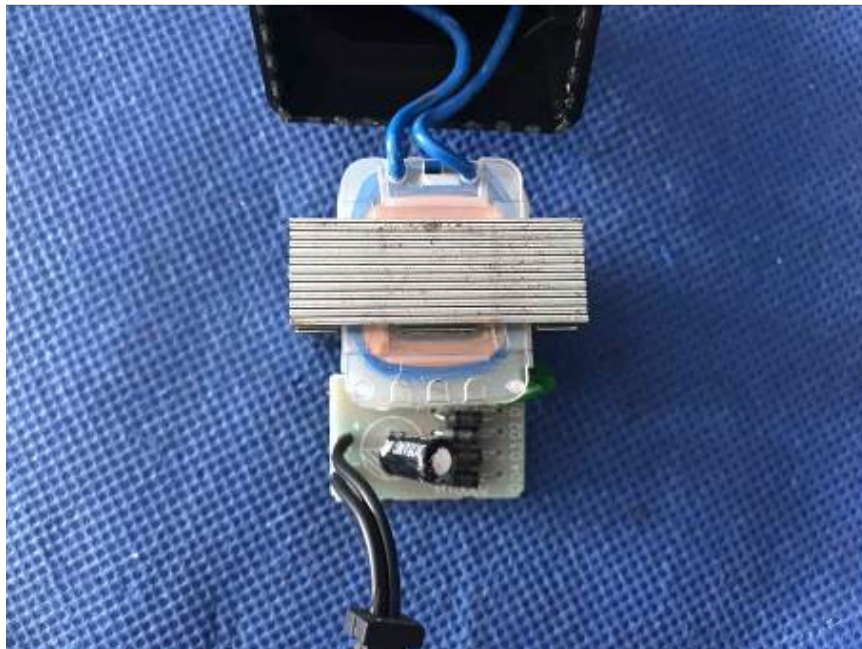



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

Report No.: SHEM180700591901
Page: 38 of 38

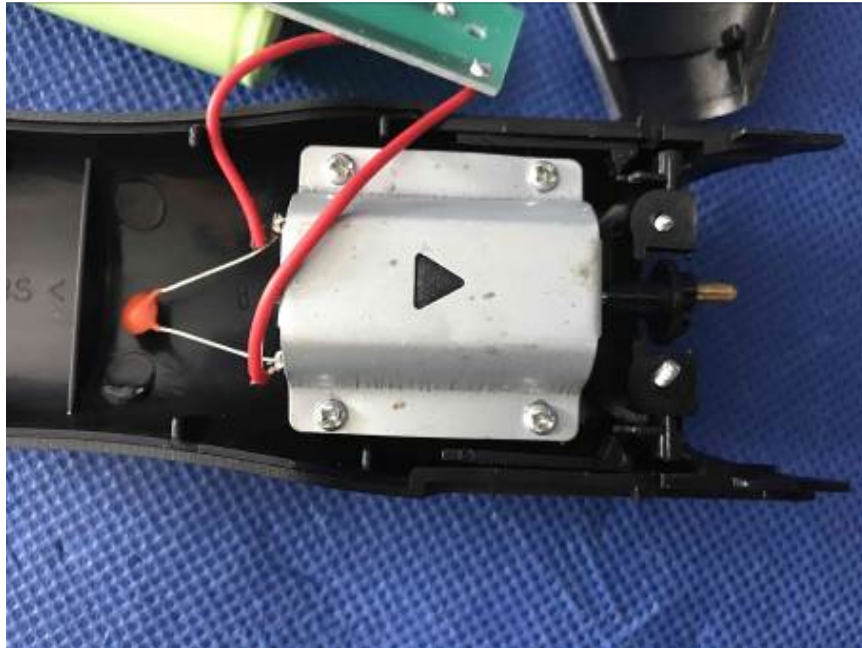

--End of the Report--