


Prüfbericht-Nr.: <i>Test Report No.:</i>	16054517 001	Auftrags-Nr.: <i>Order No.:</i>	174048210	Seite 1 von 110 Page 1 of 110
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	14.09.2015	
Auftraggeber: <i>Client:</i>				
Prüfgegenstand: <i>Test item:</i>	RACLETTE GRILL			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	See page 4			
Auftrags-Inhalt: <i>Order content:</i>	LVD			
Prüfgrundlage: <i>Test specification:</i>	EN 60335-1:2012+A11:2014 EN 60335-2-9:2003+A1+A2+A12+A13 EN 62233:2008			
Wareneingangsdatum: <i>Date of receipt:</i>	14.09.2015	Detaillierte Fotodokumentation siehe Anlage zu diesem Bericht Detailed photo documentation see appendix to this report		
Prüfmuster-Nr.: <i>Test sample No.:</i>	WTL14F0110716S			
Prüfzeitraum: <i>Testing period:</i>	15.09.2015 - 08.03.2016			
Ort der Prüfung: <i>Place of testing:</i>	See page 2			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Guangdong) Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
 Johnny Cao/Engineer Datum Name / Stellung Unterschrift <i>Date</i> <i>Name / Position</i> <i>Signature</i>		 Dono Zhou/Technical Certifier Datum Name / Stellung Unterschrift <i>Date</i> <i>Name / Position</i> <i>Signature</i>		
Sonstiges / Other: N/A				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Test item description.....	: RACLETTE GRILL
Trade Mark.....	: 
Model/Type reference	: See page 4
Ratings	: 220-240V~, 50/60Hz, Class I, for power input, see model list and label on page 4

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

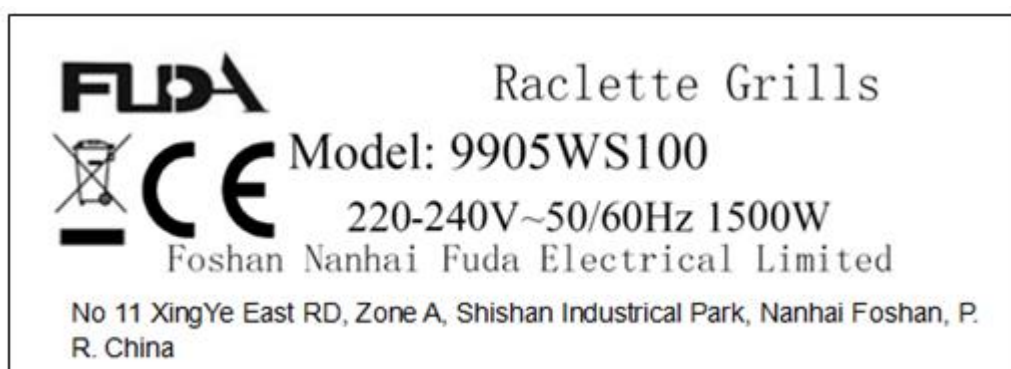

Remark: Marking plates for other models are same as model 9905WS100 except the model name and rated input power, details see model list on page 4.

Summary of testing:

1. The samples are tested and found to be complied with the requirements of standards listed on cover page.
2. Full tests were performed on model 9905WS102. Test of Clause 10 were performed on model 9905WE082. Test of Clause 10 and 11 were performed on model 9905WC060 and 9905WS040. Test of Clause 10, 11 and 19 were performed on model 9905WC082.
3. Tests of 11.Z102 were performed on model 9905WS040, 9905WC060, 9905WC082, 9905WE082, 9905WS102.
4. For EMF requirements, all required tests have been performed and passed, see page 86.
6. Testing location: Waltek Services (Foshan) Co., Ltd
2/F, 2nd Building, Sunlink International Machinery City, Chencun Town, Shunde District, Foshan 528313, Guangdong, P.R.China.

Test item particulars	
Classification of installation and use	Portable appliance and household indoor use
Supply Connection.....	Power cord with a non-detachable plug, Type Y
.....	
.....	
Possible test case verdicts:	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement	P (Pass)
- test object does not meet the requirement	F (Fail)
Testing	
Date of receipt of test item	14.09.2015
Date (s) of performance of tests	15.09.2015 –08.03.2016
General remarks:	
<p>The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> <p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a point is used as the decimal separator.</p> <ol style="list-style-type: none"> 1. Construction for all alternative components listed in table 24.1 was considered in this report. 2. The appliances were tested according European harmonized standards. 3. Factory information: Foshan Nanhai Fuda Electrical Limited No. 11, XingYe East Road, Zone A, Shishan Industrial Park, Nanhai Foshan, Guandong, P. R. China 	

General product information:

1. The appliance is for household used only and for indoor use only.
2. They have similar construction except in the shape and rated power input.
3. The heating elements of these models are same material, and the power is depended on the length of heating element.
4. There are totally 20 models, all the models have functions of contact grills, details see below model list on Table A:

Table A:							
No.	Model	Power Input	Mini Pans Quantity	Enclosure	Energy regulator	Power switch	Food supporter material
1	9905WS040	650W	Four	Rectangle	Yes	no	Metal
2	9905WS041	650W	Four	Rectangle	Yes	No	Stone
3	9905WE060	900W	Six	Ellipse	No	Yes	Metal
4	9905WE061	900W	Six	Ellipse	No	Yes	Stone
5	9905WC060	900W	Six	Cycle	No	Yes	Metal
6	9905WC061	900W	Six	Cycle	No	Yes	Stone
7	9905WS060	900W	Six	Rectangle	Yes	No	Metal
8	9905WS061	900W	Six	Rectangle	Yes	No	Stone
9	9905WE080	1200W	Eight	Ellipse	No	Yes	Metal
10	9905WE081	1200W	Eight	Ellipse	No	Yes	Stone
11	9905WE082	1200W	Eight	Ellipse	No	Yes	Metal and stone
12	9905WC080	1200W	Eight	Cycle	No	Yes	Metal
13	9905WC081	1200W	Eight	Cycle	No	Yes	Stone
14	9905WC082	1200W	Eight	Cycle	No	Yes	Metal and stone
15	9905WS080	1200W	Eight	Rectangle	Yes	No	Metal
16	9905WS081	1200W	Eight	Rectangle	Yes	No	Stone
17	9905WS082	1200W	Eight	Rectangle	Yes	No	Metal and stone
18	9905WS100	1500W	Ten	Rectangle	Yes	No	Metal
19	9905WS101	1500W	Ten	Rectangle	Yes	No	Stone
20	9905WS102	1500W	Ten	Rectangle	Yes	No	Metal and stone

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict

5	GENERAL CONDITIONS FOR THE TESTS		P
	Tests performed according to cl. 5, e.g. nature of supply, sequence of testing, etc.		P
5.2	See Note (IEC 60335-2-9)		N/A
5.101	Induction hotplates are operated as specified for motor-operated appliances. Other appliances are tested as specified for heating appliances, even if they incorporate motors (IEC 60335-2-9)		N/A
	In appliances that incorporate induction hotplates in addition to other heating elements, the induction hotplates are operated simultaneously and supplied separately (IEC 60335-2-9)		N/A

6	CLASSIFICATION		P
6.1	Protection against electric shock: Class 0, 0I, I, II, III	Class I	P
6.2	Protection against harmful ingress of water	IPX0	N/A
	Appliances intended for outdoor use shall be at least IPX4 (IEC 60335-2-9)		N/A

7	MARKING AND INSTRUCTIONS		P
7.1	Rated voltage or voltage range (V)	220-240V	P
	Nature of supply	~	P
	Rated frequency (Hz)	50/60Hz	P
	Rated power input (W)	See model list and label on page 4	P
	Rated current (A)		N/A
	Rated power input or rated current of induction hotplates (IEC 60335-2-9)		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark	See page 2.	P
	Model or type reference	See model list and label on page 4	P
	Symbol 5172 of IEC 60417, for Class II appliances		N/A
	IP number, other than IPX0	IPX0	N/A
	Symbol IEC 60417-5180, for class III appliances, unless		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	the appliance is operated by batteries only		N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
	Do not immerse beyond this level (IEC 60335-2-9)		N/A
	Hot surface(IEC 60335-2-9)		P
7.2	Warning for stationary appliances for multiple supply		N/A
	Warning placed in vicinity of terminal cover		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen		P
	Different rated values marked with the values separated by an oblique stroke		P
7.4	Appliances adjustable for different rated voltages, the voltage setting is clearly discernible		N/A
	Requirement met if frequent changes are not required and the rated voltage to which the appliance is to be adjusted is determined from a wiring diagram		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		N/A
	the power input is related to the arithmetic mean value of the rated voltage range		P
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage		P
	Symbol for class II appliances placed unlikely to be confused with other marking		N/A
	Units of physical quantities and their symbols according to international standardized system		P
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply		N/A
	Unless correct mode of connection is obvious		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		P
	- marking of terminals exclusively for the neutral conductor (N)		N/A
	- marking of protective earthing terminals (symbol 5019 of IEC 60417)		P
	- marking not placed on removable parts		P
7.9	Marking or placing of switches which may cause a hazard		P
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means	By use of figures, letters and lamp	P
	This applies also to switches which are part of a control		P
	If figures are used, the off position indicated by the figure 0		P
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		P
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided		P
	Details concerning precautions during user maintenance		P
	The instructions state that:		P
	- the appliance is not to be used by children or persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction		P
	- children being supervised not to play with the appliance		P
	For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
	Appliance with inlet and intended to be immersed for cleaning, instruction sheet including in substance: (IEC 60335-2-9)		N/A
	- remove connector before cleaning		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	- dry appliance inlet before re-use		N/A
	The instructions for use for appliances intended to be used with a connector incorporating a thermostat shall state that only the appropriate connector must be used (IEC 60335-2-9)		N/A
	Instructions for appliances for outdoor use	(IEC 60335-2-9)	N/A
	-The appliance is suitable for outdoor use		N/A
	-The supply cord should be regularly examined for signs of damage, and if the cord is damaged, the appliance must not be used		N/A
	-The appliance must be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30mA		N/A
	-The appliance is to be connected to a socket-outlet having an earthing contact (class I)		N/A
	The temperature of accessible surfaces may be high when the appliance is operating (IEC 60335-2-9)		P
	If symbol IEC 60417-5041 (DB: 2002-10) is marked on appliances, the instructions shall state that the surfaces are liable to get hot during use (IEC 60335-2-9)		P
	The instructions shall state that the appliances are not intended to be operated by means of an external timer or separate remote-control system (IEC 60335-2-9)		P
	Instructions shall include details on how to clean surfaces in contact with food.(IEC 60335-2-9)		P
	For toaster: details on how to remove breadcrumbs, when applicable..... (IEC 60335-2-9)		N/A
	For toaster: Bread may burn. Therefore toasters must not be used near or below curtains and other combustible materials. They must be watched (IEC 60335-2-9)		N/A
	For barbecue: WARNING: Charcoal or similar combustible fuels must not be used with this appliance. (IEC 60335-2-9)		N/A
	For barbecue: Maximum quantity of water to be poured into the appliance (IEC 60335-2-9)		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	If top surface of a hotplate is of glass-ceramic or similar material and protects live parts Warning : If the surface is cracked, switch off the appliance to avoid the possibility of electric shock (IEC 60335-2-9)		N/A
	For induction hotplates: Metallic objects such as knives, forks, spoons and lids not be placed on the hotplate since they can get hot.... (IEC 60335-2-9).		N/A
	For breadmakers: maximum quantities of flour and raising agent that may be used (IEC 60335-2-9)		N/A
	The instructions shall include the substance of the following: (IEC 60335-2-9)		P
	This appliances is intended to be used in household and similar applications such as: -staff kitchen areas in shops, offices and others working environments; -farm houses; -by clients in hotels, motels and other residential type environments; -bed and breakfast type environments.		P
	Note 101: If the manufacturer wants to limit the use of the appliance to less than above, this must be clearly stated in the instructions. . (IEC 60335-2-9)		P
7.12.1	Sufficient details for installation supplied		P
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated		N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N/A
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions stating that the fixed wiring must be protected		N/A
7.12.4	Instructions for built-in appliances:		N/A
	- dimensions of space		N/A
	- minimum distances between parts and surrounding structure		N/A
	- minimum dimensions of ventilating openings and arrangement		N/A
	- dimensions of ventilation openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment		P
	Replacement cord instructions, type Z attachment		N/A
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N/A
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		N/A
7.12.8	Instructions for appliances connected to the water mains:		N/A
	- max. inlet water pressure (Pa).....:		N/A
	- min. inlet water pressure, if necessary (Pa)		N/A
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N/A
7.13	Instructions and other texts in an official language	English	P
7.14	Marking clearly legible and durable, rubbing test as specified		P
	The height of the triangle used with symbol IEC 60417-5041(DB:2002-10) shall be at least 12mm (IEC 60335-2-9)		P
7.15	Marking on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool		N/A
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		P
	The marking specified for hot surfaces shall be visible when the appliance is operated as in normal used (IEC 60335-2-9)		P
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link		N/A
8	PROTECTION AGAINST ACCESS TO LIVE PARTS		P
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirement applies for all positions, detachable parts removed		P
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		P
	Use of test probe B of IEC 61032, with a force not exceeding 1 N: no contact with live parts		P
	Lamps behind a detachable cover not removed, if conditions met		N/A
	For toasters having a crumb tray : use of test probe 41 of IEC 61032 : no contact through crumb tray with live parts that are disconnected by double pole switch using (IEC 60335-2-9)		N/A
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts		P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		P
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements		N/A
8.1.4	Accessible part not considered live if:		N/A
	- safety extra-low a.c. voltage: peak value not exceeding 42.4 V		N/A
	- safety extra-low d.c. voltage: not exceeding 42.4 V		N/A
	- or separated from live parts by protective impedance		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	If protective impedance: d.c. current not exceeding 2 mA, and		N/A
	a.c. peak value not exceeding 0.7 mA		N/A
	- for peak values over 42.4 V up to and including 450 V, capacitance not exceeding 0,1 μ F		N/A
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 μ C		N/A
	- for peak values over 15kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		N/A
	- built-in appliances		N/A
	- fixed appliances		N/A
	- appliances delivered in separate units		N/A
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		P
	Only possible to touch parts separated from live parts by double or reinforced insulation		P
9	STARTING OF MOTOR-OPERATED APPLIANCES		N/A
	Requirements and tests are specified in part 2 when necessary		N/A
10	POWER INPUT AND CURRENT		P
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1	(see appended table)	P
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated power input is related to the arithmetic mean value		P
	Power input of induction hotplates measured separately (IEC 60335-2-9)		N/A
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated current is related to the arithmetic mean value of the range		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Current input of induction hotplates measured separately (IEC 60335-2-9)		N/A
11	HEATING		P
11.1	No excessive temperatures in normal use		P
	Compliance for toasters is also checked by the test of 11. 101 (IEC 60335-2-9)		N/A
11.2	Placing and mounting of appliance as described		P
	Radiant grills and raclette grills that are loaded from the front, rotary grills, ovens, breadmakers, cookers and hotplates are placed with their backs as near as possible to one of the walls of the test corner and away from the other wall (IEC 60335-2-9)		P
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless		N/A
	the windings are non-uniform or it is difficult to make the necessary connections		N/A
	If magnetic field of an induction hotplate unduly influences the results, temperature rises can be determined using platinum resistances or equivalent means (IEC 60335-2-9)		N/A
11.4	Heating appliances operated under normal operation at 1.15 times rated power input	(see appended table)	P
	If the temperature rise limits are exceeded in appliances incorporating motors, transformers or electronic circuits, and if the power input is lower than the rated power input, the test is repeated with the appliance supplied at 1,06 times rated voltage(IEC 60335-2-9)		N/A
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage.....		N/A
11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage.....		N/A
11.7	Operation duration corresponding to the most unfavourable conditions of normal use		P
	Tests carried out in compliance with the paragraphs N° 1 to 12 (IEC 60335-2-9)		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
11.8	Temperature rises not exceeding values in table 3	(see appended tables)	P
	If the temperature rise of a motor winding exceeds the value of table 3, or		N/A
	if there is doubt with regard to classification of insulation,		N/A
	tests of Annex C are carried out		N/A
	Sealing compound does not flow out		P
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N/A
	For radiant grills, rotary grills and raclette grills, hotplates and cookers, temperature rise of the wall of the test corner not exceed 75 K (IEC 60335-2-9)		P
	When an appliance connector incorporates a thermostat, the temperature rise limit for the pins of the inlet does not apply (IEC 60335-2-9)		N/A
	The temperature rise limits of motors, transformers, components of electronic circuit and parts directly influenced by them may be exceeded when the appliance is operated at 1,15 times rated power input (IEC 60335-2-9)		N/A
	Cheese used in sandwich toasting attachments doesn't flow into places where it can give rise to a hazard, such as reducing clearances or creepage distances below the values specified in Clause 29 (IEC 60335-2-9).		N/A
11.101	The toaster in which the bread is inserted through the top are operated for three cycles under normal operation at rated power input. (IEC 60335-2-9).		N/A
	The temperature rise of accessible surfaces of metallic sides that are at a height lower than 25mm below the top surface shall not exceed 90K (IEC 60335-2-9)		N/A
13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		P
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1.15 times rated power input	(see appended table)	P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Motor-operated appliances and combined appliances supplied at 1.06 times rated voltage		N/A
	Protective impedance and radio interference filters disconnected before carrying out the tests		N/A
	grill incorporated in oven, oven or grill operated most unfavourable (IEC 60335-2-9).		N/A
13.2	For class 0, class II and class III appliances, leakage current measured by means of the circuit described in figure 4 of IEC 60990		N/A
	For other appliances, a low impedance ammeter may be used		P
	Leakage current measurements	(see appended table)	P
	If earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate, leakage current between live parts and each of vessels in turn connected to earthed metal not exceeding 0,75 mA (IEC 60335-2-9)		N/A
	If no earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate, leakage current between live parts and each of vessels in turn not exceeding 0,25 mA (IEC 60335-2-9)		N/A
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to table 4	(see appended table)	P
	test voltage of 1000V if earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate (IEC 60335-2-9).		N/A
	test voltage of 3000 V if no earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate (IEC 60335-2-9).		N/A
	No breakdown during the tests		P
14	TRANSIENT OVERVOLTAGES		N/A
	Appliances withstand the transient overvoltages to which they may be subjected		N/A
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6		N/A
	No flashover during the test, unless of functional insulation		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	In case of flashover of functional insulation, the appliance complies with clause 19 with the clearance short circuited		N/A
15	MOISTURE RESISTANCE		P
15.1	Enclosure provides the degree of moisture protection according to classification of the appliance		N/A
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		N/A
	No trace of water on insulation which can result in a reduction of clearances and creepage distances below values specified in clause 29		N/A
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529		N/A
	Water valves in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N/A
15.1.2	Hand-held appliance turned continuously through the most unfavourable positions during the test		N/A
	Built-in appliances installed according to the instructions		N/A
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		N/A
	Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board		N/A
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N/A
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube		N/A
	However, for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N/A
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	For IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N/A
	Wall-mounted appliances, take into account the distance to the floor stated in the instructions		N/A
	Appliances with type X attachment fitted with a flexible cord as described		N/A
	Detachable parts tested as specified		N/A
	Detachable parts subjected to the relevant treatment with the main part		N/A
	However, if a part has to be removed for user maintenance and a tool is needed, this part is not removed		N/A
15.2	Spillage of liquid does not affect the electrical insulation		P
	Appliances with type X attachment fitted with a flexible cord as described		N/A
	Appliances incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable		N/A
	Detachable parts removed		P
	Overfilling test; quantity : as specified in IEC 60335-2-9		P
	Ovens: 0.5l (IEC 60335-2-9)		N/A
	Hotplates and cookers : 0.5l ,15s (IEC 60335-2-9)		N/A
	Hotplates incorporate a thermal control : 0.02l (IEC 60335-2-9)		N/A
	Hotplates having ventilating opening : 0.2l (IEC 60335-2-9)		N/A
	Other appliances : 0.1l/100cm ² 1min (IEC 60335-2-9)		P
	The appliance withstands the electric strength test of 16.3		P
	No trace of water on insulation that can result in a reduction of clearances and creepage distances below values specified in clause 29		P
15.101	Appliances to be immersed in water for cleaning sufficiently protected against effects of immersion (IEC 60335-2-9)		N/A
	Testing conditions and scheduling as specified		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	No trace of water on insulation which can result in reduction of creepage distances and clearance below values specified in 29		N/A
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: Damp heat steady state in IEC 60068-2-78		P
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part		P
	Humidity test for 48 h in a humidity cabinet	93%, 25°C for 48 hours	P
	Reassembly of those parts that may have been removed		P
	The appliance withstands the tests of clause 16		P
16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		P
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N/A
	Tests carried out at room temperature and not connected to the supply		P
	For hotplates, the tests are carried out with a vessel as specified for normal operation placed on each cooking zone (IEC 60335-2-9).		N/A
16.2	Single-phase appliances: test voltage 1.06 times rated voltage.....:	(see appended table)	P
	Three-phase appliances: test voltage 1.06 times rated voltage divided by $\sqrt{3}$:		N/A
	Leakage current measurements	(see appended table)	P
	Limit values doubled if:		N/A
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A
	With the radio interference filters disconnected, the leakage current do not exceed limits specified :		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	If earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate, leakage current between live parts and each of vessels in turn connected to earthed metal not exceeding 0,75 mA (IEC 60335-2-9)		N/A
	If no earthed metal between live parts and surface of glass-ceramic (or similar) of hotplate, leakage current between live parts and each of vessels in turn not exceeding 0,25 mA (IEC 60335-2-9)		N/A
16.3	Electric strength tests according to table 7	(see appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified :		P
	No breakdown during the tests		P
17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		N/A
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use		N/A
	Basic insulation is not short-circuited		N/A
	Appliance supplied with 1.06 or 0.94 times rated voltage and the most unfavourable short-circuit or overload likely to occur in normal use applied.....:		N/A
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		N/A
	Temperature of the winding not exceeding the value specified in table 8,		N/A
	however limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N/A
18	ENDURANCE		N/A
	Requirements and tests are specified in part 2 when necessary		N/A
19	ABNORMAL OPERATION		P
19.1	The risk of fire or mechanical damage under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Appliances incorporating heating elements subjected to the tests of 19.2 and 19.3, and		P
	if the appliance also has a control that limit the temperature during clause 11 it is subjected to the test of 19.4, and		P
	if applicable, to the test of 19.5		P
	Appliances incorporating PTC heating elements are also subjected to the test of 19.6		N/A
	Appliances incorporating motors subjected to the tests of 19.7 to 19.10, as applicable		N/A
	Appliances incorporating electronic circuits subjected to the tests of 19.11 and 19.12, as applicable		N/A
	Appliances incorporating contactors or relays subjected to the test of 19.14, being carried out before the tests of 19.11		N/A
	Appliances incorporating voltage selector switches subjected to the test of 19.15		N/A
	Unless otherwise specified, the tests are continued until a non-self-resetting thermal cut-out operates, or		P
	until steady conditions are established		P
	If a heating element or intentionally weak part becomes open-circuited, the relevant test is repeated on a second sample		P
	Tests of 19.4 and 19.5 are only applicable to: -breadmakers, contact grills, food deshydrators - ovens, roasters, hotplates, cookers, rotary grills if they incorporate a timer or if their instructions indicate a cooking operation longer than 1h (IEC 60335-2-9)		P
	Toasters are subjected to the tests 19.101,19.102 and 19.103 (IEC 60335-2-9)		N/A
	Induction hotplates are subjected to the tests 19.104 and 19.105(IEC 60335-2-9)		N/A
	Pop-corn makers are also subject to the test of 19.106(IEC 60335-2-9)		N/A
19.2	Test of appliance with heating elements with restricted heat dissipation; test voltage (V): power input of 0.85 times rated power input	(see appended table)	P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Radiant grills, raclette grills that are loaded from the frond, rotary grills, ovens, hotplates and cookers are placed as near as possible to the walls of the test corner (IEC 60335-2-9)	(see appended table)	P
	They are tested empty with lids open or closed whichever is the more unfavourable (IEC 60335-2-9)	(see appended table)	P
	Hotplates are operated without a vessel and with the controls adjusted to the highest setting (IEC 60335-2-9)		N/A
	Induction hotplates are operated under conditions of clause 11 but with empty vessels, controls adjusted to the highest setting (IEC 60335-2-9)		N/A
	Cookers are only tested with the heating unit that results in the most unfavourable conditions, their controls adjusted to the highest setting. However ovens are operated if they do not have an indicating lamp to show when they are switched on, controls adjusted to the highest setting (IEC 60335-2-9)		N/A
19.3	Test of 19.2 repeated; test voltage (V): power input of 1.24 times rated power input.....:	(see appended table)	P
19.4	Test conditions as in cl. 11, any control limiting the temperature during tests of cl. 11 short-circuited	(see appended table)	P
	Air-circulating fans of food dehydrators disconnected (IEC 60335-2-9)		N/A
19.5	Test of 19.4 repeated on Class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the elements sheath	Covered by 11.8 and 19.4	P
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		P
	The test is not carried out on appliances intended to be permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during the test of 19.4		N/A
19.6	Appliances with PTC heating elements tested at rated voltage, establishing steady conditions		N/A
	The working voltage of the PTC heating element is increased by 5% and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1.5 times working voltage or until the PTC heating element ruptures		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque or locking moving parts of other appliances		N/A
	Locked rotor, motor capacitors open-circuited or short-circuited, if required		N/A
	Locked rotor, capacitors open-circuited one at a time		N/A
	Test repeated with capacitors short-circuited one at a time, unless		N/A
	capacitor is of class P2 of IEC 60252-1		N/A
	Appliances with timer or programmer supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed		N/A
	Other appliances supplied with rated voltage for a period as specified		N/A
	Winding temperatures not exceeding values specified in table 8		N/A
19.9	Running overload test on appliances incorporating motors intended to be remotely or automatically controlled or liable to be operated continuously		N/A
	Motor-operated and combined appliances for which 30.2.3 is applicable and that use overload protective devices relying on electronic circuits to protect the motor windings, are also subjected to the test		N/A
	Winding temperatures not exceeding values as specified		N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless they comply with the conditions specified in 19.11.1		N/A
	Appliances having a switch with an off position obtained by electronic disconnection, or a switch placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/A
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8		N/A
	Unless restarting does not result in a hazard		N/A
	Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out		N/A
	During and after each test the following is checked:		N/A
	- the temperature of the windings do not exceed the values specified in table 8		N/A
	- the appliance complies with the conditions specified in 19.13		N/A
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N/A
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:		N/A
	- the base material of the printed circuit board withstands the test of Annex E		N/A
	- any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in clause 29		N/A
19.11.1	Before applying the fault conditions a) to f) in 19.11.2, it is checked if circuits or parts of circuit meet both of the following conditions:		N/A
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified		N/A
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction in other parts of the appliance does not rely on the correct functioning of the electronic circuit		N/A
19.11.2	Fault conditions applied one at a time, the appliance operated under conditions specified in cl. 11, but supplied at rated voltage, the duration of the tests as specified:		N/A
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in 29		N/A
	b) open circuit at the terminals of any component		N/A
	c) short circuit of capacitors, unless they comply with IEC 60384-14		N/A
	d) short circuit of any two terminals of an electronic component, other than integrated circuits. This fault condition is not applied between the two circuits of an optocoupler		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	This fault condition is not applied between the two circuits of an optocoupler		N/A
	e) failure of triacs in the diode mode		N/A
	f) failure of an integrated circuit		N/A
	g) failure of an electronic power switching device		N/A
	Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made		N/A
19.11.3	If the appliance incorporates a protective electronic circuit which operates to ensure compliance with clause 19, the relevant test is repeated with a single fault simulated, as indicated in a) to f) of 19.11.2		N/A
	During and after each test the following is checked:		N/A
	- the temperature rise of the windings do not exceed the values specified in table 8		N/A
	- the appliance complies with the conditions specified in 19.13		N/A
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N/A
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided all three of the following conditions are met:		N/A
	- the material of the printed circuit board withstands the burning test of annex E		N/A
	- any loosened conductor does not reduce the clearances or creepage distances between live parts and accessible metal parts below the values specified in cl. 29		N/A
	- the appliance withstands the tests of 19.11.2 with open-circuited conductor bridged		N/A
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or		N/A
	a device that can be placed in the stand-by mode,		N/A
	subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode		N/A
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated, except that		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	appliances operated for 30 s or 5 min during the test of 19.7 are not subjected to the tests for electromagnetic phenomena.		N/A
	Surge protective devices disconnected, unless		N/A
	They incorporate spark gaps		N/A
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		N/A
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, test level 3		N/A
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		N/A
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5, test level 3 or 4 as specified		N/A
	Earthed heating elements in class I appliances disconnected		N/A
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		N/A
19.11.4.6	Appliances having a rated current not exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11		N/A
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2		N/A
19.11.4.8	The appliance is supplied at rated voltage and operated under normal operation. After 60s the power supply is reduces to a level such that the appliance ceases to respond or a programmable component cease to operate.		N/A
	The appliance continues to operate normally or requires a manual operation to restart		N/A
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); rated current of the fuse-link (A):		N/A
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Temperature rises not exceeding the values shown in table 9	(see appended table)	P
	Compliance with cl. 8 not impaired		P
	If the appliance can still be operated it complies with 20.2		P
	Insulation, other than of class III appliance, withstand the electric strength test of 16.3, the test voltage specified in table 4:		P
	- basic insulation.....:	1000V	P
	- supplementary insulation	1750V	P
	- reinforced insulation	3000V	P
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstanding the electric strength test of 16.3. the test voltage being twice the working voltage		P
	The appliance does not undergo a dangerous malfunction, and		P
	no failure of protective electronic circuits, if the appliance is still operable		N/A
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		N/A
	- do not become operational, or		N/A
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N/A
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that:		N/A
	- the lid or door does not move automatically to an open position when the interlock is released, and		N/A
	- the appliance does not start after the cycle in which the interlock was released		N/A
	During the test of 19.102 and 19.103 any flame or smoke from the bread are ignored (IEC 60335-2-9)		N/A
	Temperature rise of the windings of induction hotplates not exceeding the values specified in 19.7 (IEC 60335-2-9)		N/A
19.14	Appliances operated under the conditions of Clause 11. Contactors or relays contacts operating under the conditions of clause 11 short-circuited		N/A
	For a relay or contactor with more than one contact, all contacts are short-circuited at the same time		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited		N/A
	If more than one relay or contactor operates in clause 11, they are short-circuited in turn		N/A
	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied		N/A
19.101	Toasters operated at rated power input and under normal operation, but without bread, for six cycles of operation, test repeated 500 times (IEC 60335-2-9)		N/A
	The mechanism operates satisfactorily and no sustained arcing occurs. (IEC 60335-2-9)		N/A
19.102	Toasters: test with the ejector mechanism locked (IEC 60335-2-9)		N/A
19.103	Toasters: operated at rated power input, load with the bread specified for normal operation for 2 cycles, with the control at maximum setting. The bread is not replaced. (IEC 60335-2-9)		N/A
19.104	Induction hotplates operated with the specified steel disk placed on the centre of the cooking zone (IEC 60335-2-9)		N/A
19.105	Induction hotplates operated with thermal controls short-circuited or rendered inoperative in turn: The temperature rise of the oil shall not exceed 270 K (IEC 60335-2-9).		N/A
19.106	Pop-corn makers: operated under conditions of clause 11 for a period of 5 min but with the pop corn outlet blocked by means of a grid with a mesh size small enough to keep the pop corn from being ejected from the appliance (IEC 60335-2-9)		N/A
20	STABILITY AND MECHANICAL HAZARDS		P
20.1	Adequate stability		P
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		P
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		P
	Possible heating test in overturned position; temperature rise does not exceed values shown in table 9		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		N/A
	Protective enclosures, guards and similar parts are non-detachable		N/A
	Adequate mechanical strength and fixing of protective enclosures		N/A
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard, by unexpected reclosure		N/A
	Not possible to touch dangerous moving parts with test probe		N/A
20.101	Oven with horizontal hinged door: successful tilting test in conditions as specified, if relevant (weight of 3,5 kg) (IEC 60335-2-9).		N/A
21	MECHANICAL STRENGTH		P
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J		P
	The appliance shows no damage impairing compliance with this standard, and		P
	compliance with 8.1, 15.1 and clause 29 not impaired		P
	For appliances intended for outdoor use, the impact energy is 0.7J (IEC 60335-2-9)		N/A
	If necessary, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A
	Appliances incorporates visibly glowing heating elements located at the top of the oven and accessible to the test probe 41 of IEC 61032 (IEC 60335-2-9)		N/A
	Appliances incorporates visibly glowing heating elements located elsewhere in the oven and accessible to the test probe B of IEC 61032 (IEC 60335-2-9)		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	For hotplates with surfaces of glass-ceramic or similar, three blows applied to parts surfaces not exposed to the test of 21.101, impact energy 0,70J \pm 0,05 J. (IEC 60335-2-9)		N/A
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		P
	The insulation is tested as specified, unless		N/A
	the thickness of supplementary insulation is at least 1 mm and reinforced insulation is at least 2 mm		P
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		N/A
21.101	Surfaces of hotplates of glass-ceramic or similar material withstand the stresses liable to occur in normal use, under test conditions as specified (IEC 60335-2-9).		N/A
	After the tests, surface of hotplate not broken (IEC 60335-2-9).		N/A
	Withstand dielectric strength test of 16.3 (IEC 60335-2-9).		N/A
22	CONSTRUCTION		P
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled		N/A
22.2	Stationary appliance: means to provide all-pole disconnection from the supply provided, the following means being available:		N/A
	- a supply cord fitted with a plug		N/A
	- a switch complying with 24.3		N/A
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided		N/A
	- an appliance inlet		N/A
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets		N/A
	Applied torque not exceeding 0.25 Nm		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Pull force of 50N to each pin after the appliance has been placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1mm		N/A
	Each pin subjected to a torque of 0.4Nm; the pins are not rotating unless rotating does not impair compliance with the standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N/A
22.5	No risk of electric shock when touching the pins of the plug, for appliances having a capacitor with rated capacitance exceeding 0,1µF, the appliance being disconnected from the supply at the instant of voltage peak		N/A
	Voltage not exceeding 34 (V) :		N/A
22.6	Electrical insulation not affected by condensing water or leaking liquid		P
	Electrical insulation of Class II appliances not affected in case of a hose rupture or seal leak		N/A
	In case of doubt, test as described		N/A
22.7	Adequate safeguards against the risk of excessive pressure in appliances provided with steam-producing devices		N/A
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		P
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances		P
	the substance has adequate insulating properties		N/A
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance		N/A
	If: - a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Non-self resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts		N/A
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		N/A
	Tests as described		P
22.12	Handles, knobs etc. fixed in a reliable manner		P
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		P
	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied		P
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied		P
22.13	Unlikely that handles, when gripped as in normal use, make the operators hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		P
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self tapping screws etc., liable to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded		N/A
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands, no undue wear of contacts		N/A
	Cord reel tested with 6000 operations, as specified		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Electric strength test of 16.3, voltage of 1000 V applied		N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A
22.18	Current-carrying parts and other metal parts resistant to corrosion under normal conditions of use		P
22.19	Driving belts not relied upon to provide the required level of insulation, unless		N/A
	constructed to prevent inappropriate replacement		N/A
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless material used is non-corrosive, non-hygroscopic and non-combustible		P
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless impregnated		P
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		P
22.22	Appliances not containing asbestos	No asbestos	P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P
22.24	Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported		N/A
	Heating elements constructed or supported so they are unlikely to become displaced in normal use. (IEC 60335-2-9)		N/A
	In case of rupture, the heating conductor is unlikely to come in contact with accessible metal parts		N/A
22.25	Sagging heating conductors, except in class III appliances or class III constructions that do not contain live parts, cannot come into contact with accessible metal parts		N/A
22.26	For class III constructions the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N/A
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
22.28	Metal parts of Class II appliances conductively connected to gas pipes or in contact with water: separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation		N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Clearances and creepage distances over supplementary and reinforced insulation not reduced below values specified in clause 29 as a result of wear		P
	Clearances and creepage distances between live parts and accessible parts not reduced below values for supplementary insulation, if wires, screws etc. become loose		P
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		P
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar material or beads alone not used as supplementary or reinforced insulation		N/A
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
	Insulating material in which heating conductors are embedded is considered to be basic insulation and not reinforced insulation		P
22.33	Conductive liquids that are or may become accessible in normal use are not in direct contact with live parts		N/A
	Electrodes not used for heating liquids		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts, not in direct contact with basic or reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	For class II constructions, conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N/A
22.34	Shafts of operating knobs, handles, levers etc. not live, unless the shaft is not accessible when the part is removed		P
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		P
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		P
	This requirement does not apply to handles, levers and knobs on stationary appliances other than those of electrical components, provided they are either reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation		N/A
22.36	For appliances other than class III, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless		N/A
	they are separated from live parts by double or reinforced insulation		N/A
22.37	Capacitors in Class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		N/A
	the capacitors comply with 22.42		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
22.38	Capacitors not connected between the contacts of a thermal cut-out		N/A
22.39	Lamp holders used only for the connection of lamps		P
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N/A
	Unless the appliance can operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch. The actuating member of the switch being easily visible and accessible.		N/A
22.41	No components, other than lamps, containing mercury		P
22.42	Protective impedance consisting of at least two separate components		N/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.1 a) in IEC 60065		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur		N/A
22.44	Appliances shall not have an enclosure that is shaped or decorated like a toy		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.4 due to deformation as a result of an external force applied to the enclosure		P
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in table R.1		N/A
	Software that contains measures to control the fault/error conditions specified in table R.2 is to be specified in parts 2 for particular constructions or to address specific hazards		N/A
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use		N/A
	No leakage from any part, including any inlet water hose		N/A
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water		N/A
22.49	For remote operation, the duration of operation shall be set before the appliance can be started, unless		N/A
	the appliance switches off automatically or can operate continuously without hazard		N/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N/A
22.51	A control on the appliance being manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N/A
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	These requirements not necessary on appliances that can operate as follows, without giving rise to a hazard:		N/A
	- operate continuously,		N/A
	- operate automatically, or		N/A
	- be operated remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold		N/A
22.101	Radiant grills: no timer that is intended to delay the operation of a heating element,(IEC 60335-2-9)		N/A
	Unless having a thermostat and being incorporated in an oven or other compartment,(IEC 60335-2-9)		N/A
22.102	Barbecue shall not be provided with bare heating elements,(IEC 60335-2-9)		N/A
	Oven: heating elements with bare conductors at the top only,(IEC 60335-2-9)		N/A
22.103	Oven vents constructed so that moisture or grease cannot reduce the clearances and creepage distances. (IEC 60335-2-9)		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
22.104	Ovens constructed so that shelves can easily slide in the supports and do not fall out of position when the sides are displaced as much as possible. (IEC 60335-2-9)		N/A
22.105	Appliances have not openings on the underside that would allow small items to penetrate and touch live parts. (IEC 60335-2-9)		P
	Distance measured between the supporting surface and live parts through openings (IEC 60335-2-9)		P
	Distance requested as specified: . (IEC 60335-2-9)	Measured minimum 17mm	P
22.106	Grills and barbecues constructed so that their heating elements are fixed in position or prevented from operating when they are not in their normal position of use. (IEC 60335-2-9)		N/A
22.107	Hotplate constructed so that heating elements are prevented from rotating about a vertical axis and are adequately supported in all positions of adjustment of their supports. (IEC 60335-2-9)		N/A
22.108	Hotplate constructed so that inadvertent operation of touch controls is unlikely if this could give rise to a hazardous situation due to spillage of liquids or damp clothe placed on the control panel, and complies with test as specified.. (IEC 60335-2-9)		N/A
22.109	Hotplate incorporating touch controls constructed so that at least two manual operations are requested to switch on a heating element but only one to switch it off. (IEC 60335-2-9)		N/A
22.110	Induction hotplates constructed so that they can only be operated with a suitable vessel placed on the cooking zone. (IEC 60335-2-9)		N/A
	Temperature rise of iron not exceeding 35K (IEC 60335-2-9)		N/A
22.111	Heating element in breadmakers located so they are not exposed to dough that they may rise over the edge of the dough container during normal use of the appliance (IEC 60335-2-9)		N/A
22.112	Reconnection of the power supply to a breadmaker after an interruption shall not result in a fire due to an extended heating period..... (IEC 60335-2-9)		N/A
	All batteries are removed and the breadmaker is supplied at rated voltage and operated in heating mode without load (IEC 60335-2-9)		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	The appliance shall eventually require a manual operation to restart it (IEC 60335-2-9)		N/A
22.113	Toasters having an ejector mechanism shall be constructed so that they switch off automatically after the normal toasting time even if the ejector mechanism is blocked (IEC 60335-2-9)		N/A
23	INTERNAL WIRING		P
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well rounded or provided with bushings		P
	Wiring effectively prevented from coming into contact with moving parts		P
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges		N/A
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		N/A
	Flexible metallic tubes not causing damage to insulation of conductors		N/A
	Open-coil springs not used		N/A
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	No damage after 10 000 flexings for conductors flexed during normal use or 100 flexings for conductors flexed during user maintenance		N/A
	Appliance with 2 stop positions: 1 000 flexings made with moving part fully opened(IEC 60335-2-9)		N/A
	Electric strength test, 1000 V between live parts and accessible metal parts		N/A
	Not more than 10% of the strands of any conductor broken, and		N/A
	not more than 30% for wiring supplying circuits that consume no more than 15W		N/A
23.4	Bare internal wiring sufficiently rigid and fixed		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
23.5	The insulation of internal wiring withstanding the electrical stress likely to occur in normal use		P
	Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or		N/A
	No breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation		P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		N/A
	be such that it can only be removed by breaking or cutting		N/A
23.7	The colour combination green/yellow used only for earthing conductors		P
23.8	Aluminium wires not used for internal wiring		P
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)		N/A
24	COMPONENTS		P
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components	(see appended table)	P
	Components not tested and found to comply with relevant IEC standard for the number of cycles specified are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components not tested and found to comply with relevant IEC standard, components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P

IEC 60335-2-9			
Clause	Requirement - Test		Verdict
	Lampholders and starterholders not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		P
	No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309		P
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, complying with IEC 60384-14, or		N/A
	If the capacitors have to be tested, they are tested according to Annex F		N/A
24.1.2	Safety isolating transformers complying with IEC 61558-2-6, or		N/A
	If they have to be tested, they are tested according to Annex G		N/A
24.1.3	Switches complying with IEC 61058-1, the number of cycles of operation being at least 10 000, or		P
	If they have to be tested, they are tested according to Annex H		N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
	Switches controlling heating elements of hotplates subjected to 30 000 cycles of operation (IEC 60335-2-9)		N/A
	Switches controlling heating elements of toasters subjected to 50 000 cycles of operation (IEC 60335-2-9)		N/A
24.1.4	Automatic controls complying with IEC 60730-1 with the relevant part 2. The number of cycles of operation being at least:		P
	- thermostats:	10 000	P
	- temperature limiters:	1 000	N/A
	- self-resetting thermal cut-outs:	300	N/A
	- voltage maintained non-self-resetting thermal cut-outs:	1000	N/A
	- other non-self-resetting thermal cut-outs:	30	N/A

IEC 60335-2-9				
Clause	Requirement - Test		Result - Remark	Verdict
	- timers:	3 000		N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited			N/A
	- energy regulators for automatic action (IEC 60335-2-9):	100 000		N/A
	- energy regulators for manual action (IEC 60335-2-9):	10 000		N/A
	Self-resetting thermal cut-outs for heating elements of glass-ceramic hotplates (IEC 60335-2-9)	100 000		N/A
	Self-resetting thermal cut-outs for other hotplates (IEC 60335-2-9)	10 000		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D			N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7			N/A
24.1.5	Appliance couplers complying with IEC 60320-1			N/A
	However, appliances classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3			N/A
	Interconnection couplers complying with IEC 60320-2-2			N/A
	Appliance couplers incorporating thermostats, thermal cut-outs or fuses comply with IEC 60320-1, with exceptions specified in IEC 60335-9 (IEC 60335-2-9)			N/A
	Not applicable to conditions as specified (IEC 60335-2-9)			N/A
24.1.6	Small lamp holders similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable			P
24.1.7	If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151			N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
24.1.8	The relevant standard for thermal links is IEC 60691. Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19	Approved	P
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance		N/A
	They are also tested in accordance with Clause 17 of IEC 60730-1, the number of operations in 24.1.4 selected according to the relay function in the appliance		N/A
24.2	Appliances not fitted with:		P
	- switches or automatic controls in flexible cords		P
	No devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	No thermal cut-outs that can be reset by soldering		P
	Unless the solder has a melting point of at least 230 °C		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and having a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N/A
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N/A
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance and used accordingly		N/A
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load		N/A
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42V		N/A
	In addition, the motors are complying with the requirements of Annex I		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770		N/A
	They are supplied with the appliance		N/A
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N/A
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		N/A
	One or more of the following conditions are to be met:		N/A
	- the capacitors are of class P2 according to IEC 60252-1		N/A
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of Annex E		N/A
24.101	Thermostats and energy regulators incorporating an off position: off position maintained under test conditions (IEC 60335-2-9)		N/A
	Thermostats and energy regulators incorporating an off position : no breakdown after application of 500V across the contacts not switch on as a result of variations in ambient temperature (IEC 60335-2-9)		N/A
24.102	Thermal cut-outs incorporated in food dehydrators in order to comply with 19.4 are non-self resetting (IEC 60335-2-9)		N/A
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		P
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		P
	- supply cord fitted with a plug		P
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance		N/A
	- pins for insertion into socket-outlets		N/A
	Appliances incorporating an appliance inlet other than those standardized in IEC 60320-1, shall be supplied with a cord set (IEC 60335-2-9)		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
25.2	Appliance not provided with more than one means of connection to the supply mains		P
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		N/A
	- a set of terminals allowing the connection of a flexible cord		N/A
	- a fitted supply cord		N/A
	- a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N/A
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in 29		N/A
25.5	Method for assemble supply cord with the appliance:		P
	- type X attachment		N/A
	- type Y attachment		P
	- type Z attachment, if allowed in part 2		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A
25.6	Plugs fitted with only one flexible cord		P
25.7	Supply cords, other than for class III appliances, being one of the following types:		P
	- rubber sheathed (at least 60245 IEC 53)	H05RR-F	P
	- polychloroprene sheathed (at least 60245 IEC 57)		N/A
	- cross-linked polyvinyl chloride sheathed (at least 60245 IEC 88)		N/A
	Polyvinyl chloride sheathed: Not used if they are likely to touch metal parts having a temperature rise exceeding 75K during the test of Clause 11.		P
	- light polyvinyl chloride sheathed cord (at least 60227 IEC 52), appliances not exceeding 3 kg		N/A
	- ordinary polyvinyl chloride sheathed cord (at least 60227 IEC 53), other appliances		N/A
	Heat resistant polyvinyl chloride sheathed: Not used for type X attachment other than specially prepared cords.		N/A
	- Heat-resistant light polyvinyl chloride sheathed cord (at least 60227 IEC 56), appliances not exceeding 3 kg		N/A
	- heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), other appliances		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A
25.8	Nominal cross-sectional area of supply cords according to table 11; rated current (A); cross-sectional area (mm²):	3G0.75mm² (max. length 2m) Max. 6.5A	P
25.9	Supply cord not in contact with sharp points or edges		P
25.10	Green/yellow core for earthing purposes in Class I appliance		P
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
25.12	Moulding the cord to part of the enclosure does not damage the insulation of the supply cord		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
25.13	Inlet opening so shaped as to prevent damage to the supply cord		P
	Unless the enclosure at the inlet opening is of insulation material, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		P
	If unsheathed supply cord, a similar additional bushing or lining is required, unless		N/A
	the appliance is class 0		N/A
	or a class III appliance not containing live parts		N/A
25.14	Supply cords moved while in operation adequately protected against excessive flexing		N/A
	Flexing test:		N/A
	- applied force (N).....:		N/A
	- number of flexings.....:		N/A
	The test does not result in:		N/A
	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		N/A
	- breakage of more than 10% of the strands of any conductor		N/A
	- separation of the conductor from its terminal		N/A
	- loosening of any cord guard		N/A
	- damage to the cord or the cord guard		N/A
	- broken strands piercing the insulation and becoming accessible		N/A
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		P
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		P
	Pull and torque test of supply cord, values shown in table 10: pull (N); torque (not on automatic cord reel) (Nm).....:	100N, 0.35Nm	P
	Cord not damaged and max. 2 mm displacement of the cord	0.3mm displacement of the cord	P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
25.16	Cord anchorages for type X attachments constructed and located so that:		N/A
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless part of a specially prepared cord		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, if applicable		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N/A
	- for Class 0, 0I and I appliances: they are of insulating material or are provided with an insulating lining, unless a failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for Class II appliances: they are of insulating material, or if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A
	After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals		N/A
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		P
25.18	Cord anchorages only accessible with the aid of a tool, or		P
	so constructed that the cord can only be fitted with the aid of a tool		P
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
25.20	The insulated conductors of the supply cord for type Y and Z attachment additionally insulated from accessible metal parts		P
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		N/A
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		N/A
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		N/A
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		N/A
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A
25.22	Appliance inlet:		N/A
	- live parts not accessible during insertion or removal		N/A
	Requirement not applicable to appliance inlets complying with IEC 60320-1		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
	- is not for cold conditions if temp. rise of external metal parts exceeds 75 K, unless the supply cord is not likely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except as specified		N/A
	- the cross-sectional area of the conductors is determined on the basis of the maximum current during clause 11		N/A
	- the thickness of the insulation may be reduced		N/A
	If necessary, electric strength test of 16.3		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with the standard is impaired when they are disconnected		N/A
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet.		N/A
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC/TR 60083		N/A
26	TERMINALS FOR EXTERNAL CONDUCTORS		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover		P
	for class III appliances that do not contain live parts		N/A
	However, earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A
26.2	Appliances with type X attachment and appliances for connection to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless the connections are soldered		N/A
	Screws and nuts serve only to clamp supply conductors, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone		N/A
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A
26.3	Terminals for type X attachment and for connection to fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure and without damaging the conductor		N/A
	Terminals for type X attachment and those for connection to fixed wiring so fixed that when tightening or loosening the clamping means:		N/A
	- the terminal does not loosen		N/A
	- internal wiring is not subjected to stress		N/A
	- clearances and creepage distances are not reduced below the values in 29		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified. Nominal diameter of thread (mm); screw category; torque (Nm):		N/A
	No deep or sharp indentations of the conductors		N/A
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar, and		N/A
	so constructed or placed that conductors prevented from slipping out when clamping screws or nuts are tightened		N/A
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and, for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection to fixed wiring suitable for connection of conductors with required cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm ²):		N/A
	If a specially prepared cord is used, terminals need only be suitable for that cord		N/A
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N/A
26.8	Terminals for the connection to fixed wiring, including the earthing terminal, located close to each other		N/A
26.9	Terminals of the pillar type constructed and located as specified		N/A
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless conductors ends fitted with a device suitable for screw terminals		P
	Pull test of 5 N to the connection		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
26.11	For type Y and Z attachment: soldered, welded, crimped and similar connections may be used		P
	For Class II appliances: the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N/A
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N/A
27	PROVISION FOR EARTHING		P
27.1	Accessible metal parts of Class 0I and I appliances, permanently and reliably connected to an earthing terminal or contact of the appliance inlet		P
	Earthing terminals not connected to neutral terminal		P
	Class 0, II and III appliance have no provision for earthing	Class I	N/A
	Safety extra-low voltage circuits not earthed, unless protective extra-low voltage circuits		N/A
	No earthing via flexible metal tubes, coiled springs and cord anchorage(IEC 60335-2-9)		N/A
27.2	Clamping means adequately secured against accidental loosening		P
	Terminals used for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm ² , and		N/A
	do not provide earthing continuity between different parts of the appliance		P
	Conductors cannot be loosened without the aid of a tool		P
27.3	For detachable parts that are plugged into another part of the appliance, and having an earth connection, the earth connection made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cord, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		P
	Adequate resistance to corrosion of coated or uncoated parts providing earthing continuity, other than parts of a metal frame or enclosure		P
	Parts of steel providing earthing continuity provided at the essential areas with an electroplated coating, thickness at least 5 µm		N/A
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		P
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts		P
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided that clearances of basic insulation are based on the rated voltage of the appliance		N/A
	Resistance not exceeding 0,1 Ω at the specified low-resistance test	Measured max.: 0.07Ω	P
27.6	The printed conductors of printed circuit boards shall not be used to provide earthing continuity in hand-held appliances.		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A
28	SCREWS AND CONNECTIONS		P
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Screws of insulating material not used for any electrical connection or connections providing earthing continuity		N/A
	Screws used for electrical connections or connections providing earthing continuity screw into metal		P
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		N/A
	Type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw can impair basic insulation		N/A
	For screws and nuts; torque-test as specified in table 14 :	(see appended table)	P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		P
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		P
	This requirement does not apply to electrical connections in circuits of appliances for which:		N/A
	<input type="checkbox"/> 30.2.2 is applicable and that carry a current not exceeding 0,5 A		N/A
	<input type="checkbox"/> 30.2.3 is applicable and that carry a current not exceeding 0,2 A		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		N/A
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		N/A
	- in normal use,		N/A
	- during user maintenance,		N/A
	- when replacing a supply cord having a type X attachment, or		N/A
	- during installation		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	At least two screws being used for each connection providing earthing continuity, unless		N/A
	the screw forms a thread having a length of at least half the diameter of the screw		N/A
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		P
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		N/A
	if an alternative earthing circuit is provided		N/A
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if subjected to torsion		P
29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		P
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), annex J applies		N/A
	The microenvironment is pollution degree 1 under Type 1 coating		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3		N/A
	These values apply to functional, basic, supplementary and reinforced insulation :	(see appended table)	P
29.1	Clearances not less than the values specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15, unless		P
	for basic insulation and functional insulation they comply with the impulse voltage test of clause 14		N/A
	However, if the construction is affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1500V and above are increased by 0,5 mm and the impulse voltage test is not applicable		P
	Impulse voltage test not applicable:		P
	- when the microenvironment is pollution degree 3		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	- for basic insulation of class 0 and class 01 appliances		N/A
	Appliances are in overvoltage category II		P
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		P
	The values of table 16 or the impulse voltage test of clause 14 are applicable :	(see appended table)	P
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1mm if the microenvironment is pollution degree 1		P
	Lacquered conductors of windings considered to be bare conductors		N/A
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16		P
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, using the next higher step for rated impulse voltage :	(see appended table)	P
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		P
29.1.4	Clearances for functional insulation are the largest values determined from:	(see appended table)	P
	- table 16 based on the rated impulse voltage :		P
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If values of table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A
	the microenvironment is pollution degree 3, or		P
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N/A
	the appliance complies with clause 19 with the functional insulation short-circuited		N/A
	Lacquered conductors of windings considered to be bare conductors		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	However, clearances at crossover points are not measured		N/A
	Clearance between surfaces of PTC heating elements may be reduced to 1mm		N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		N/A
	- table 16 based on the rated impulse voltage :		N/A
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1 or Clause 4 of IEC 60664-4, the clearances of supplementary insulation are not less than those specified for basic insulation		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160% of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from Clause 4 of IEC 60664-4, the clearances of reinforced insulation are twice the value required for basic insulation		N/A
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N/A
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation based on the working voltage used as the rated voltage in table 15		N/A
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree		P
	Pollution degree 2 applies, unless		N/A
	precautions taken to protect the insulation; pollution degree 1		N/A
	insulation subjected to conductive pollution; pollution degree 3		P
	A force of 2 N is applied to bare conductors, other than heating elements		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		P
	Pollution degree 3 applies, unless the insulation is enclosed or located so that it is unlikely to be exposed to pollution during normal use of the appliance (IEC 60335-2-9)		P
	Compliance is checked by inspection and measurements as specified		P
29.2.1	Creepage distances of basic insulation not less than specified in table 17	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 17 :		N/A
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14 :		N/A
29.2.2	Creepage distances of supplementary insulation at least as specified for basic insulation in table 17	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable :		N/A
29.2.3	Creepage distances of reinforced insulation at least double as specified for basic insulation in table 17	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable :		N/A
29.2.4	Creepage distances of functional insulation not less than specified in table 18	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 18 :		N/A
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		N/A
29.3	Supplementary and reinforced insulation having adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked by:		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	- measurement, in accordance with 29.3.1, or		P
	- an electric strength test in accordance with 29.3.2, or		N/A
	- an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3		P
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
	Requirement not applied to the sheath of a visibly glowing heating element that is inaccessible to test probe 41 of IEC 61032 (IEC 60335-2-9)		N/A
29.3.1	Supplementary insulation having a thickness of at least 1 mm		P
	Reinforced insulation having a thickness of at least 2 mm		P
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation		N/A
	Supplementary insulation consisting of at least 2 layers		N/A
	Reinforced insulation consisting of at least 3 layers		N/A
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		P
	the electric strength test of 16.3		P
	If the temperature rise during the tests of Clause 19 does not exceed the value specified in Table 3, the test of IEC 60068-2-2 is not carried out		N/A
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in table 19 :		N/A
30	RESISTANCE TO HEAT AND FIRE		P
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P
	thermoplastic material providing supplementary or reinforced insulation,		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	sufficiently resistant to heat		P
	Ball-pressure test according to IEC 60695-10-2		P
	External parts: at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C)	(see appended table)	P
	Parts supporting live parts: at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 125°C, whichever is the higher; temperature (°C)	(see appended table)	P
	Parts of thermoplastic material providing supplementary or reinforced insulation, 25°C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C)	(see appended table)	P
	Temperature rises occurring during the test of 19.102 are not taken into account (IEC 60335-2-9)		N/A
30.2	Parts of non-metallic material adequately resistant to ignition and spread of fire		P
	This requirement does not apply to:		N/A
	parts having a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		N/A
	decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		N/A
	Compliance checked by the test of 30.2.1. In addition:		P
	- attended appliances, 30.2.2 applies		P
	- unattended appliances, 30.2.3 applies		N/A
	Appliances for remote operation, 30.2.3 applies		N/A
	Base material of printed circuit board, 30.2.4 applies		N/A
	For breadmakers, food dehydrators, 30.2.3 applies (IEC 60335-2-9)		N/A
	For cookers, ovens, roasters, rotary grills if they incorporate a timer or if their instructions indicate a cooking operation longer than 1h , 30.2.3 applies (IEC 60335-2-9)		N/A
	For other appliances, 30.2.2 applies (IEC 60335-2-9)		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11 at 550 °C		P
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N/A
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out meet the requirements in ISO9772 for category HBF material		N/A
30.2.2	Appliances operated while attended, parts of non-metallic material supporting current-carrying connections, and		P
	parts of non-metallic material within a distance of 3mm of such connections,		P
	subjected to the glow-wire test of IEC 60695-2-11		P
	The test severity is:		P
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		P
	- 650 °C, for other connections		P
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C, or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10 :		N/A
	Glow-wire test not applicable to conditions as specified :		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		N/A
	Tests not applicable to conditions as specified		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
30.2.3.1	Parts of insulating material supporting connections carrying a current exceeding 0.2A during normal operation, and		N/A
	parts of non-metallic material, other than small parts, within a distance of 3 mm,		N/A
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850°C		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		N/A
30.2.3.2	Parts of non-metallic material supporting connections, and		N/A
	parts of non-metallic material within a distance of 3mm,		N/A
	subjected to glow-wire test of IEC 60695-2-11		N/A
	The test severity is:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:		N/A
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N/A
	□ 775 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	□ 675 °C, for other connections		N/A
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		N/A
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of Annex E, or		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	The consequential needle-flame test of Annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		N/A
	- parts that withstood the glow-wire test of IEC 60695-2-11 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		N/A
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts for which the needle-flame test of Annex E was applied, or		N/A
	- small parts for which a material classification of V-0 or V-1 was applied		N/A
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		N/A
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N/A
	- parts shielded by a flame barrier that meets the needle-flame test of Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
30.2.4	Base material of printed circuit boards subjected to needle-flame test of annex E		N/A
	Test not applicable to conditions as specified		N/A
31	RESISTANCE TO RUSTING		P
	Relevant ferrous parts adequately protected against rusting		P
	Tests specified in part 2 when necessary		N/A
	For appliances intended for outdoor use, compliance is checked by the salt mist test, Kb of IEC 60068-2-52, severity 2 applicable (IEC 60335-2-9)		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	Before the test, enclosures having a coating are scratched by means of hardened steel pin (IEC 60335-2-9)		N/A
	After the test, the appliance shall not have deteriorated to such an extent that compliance with this standard, in particular with Clauses 8 and 27, is impaired (IEC 60335-2-9)		N/A
	After the test, the coating shall not be broken and shall not have loosened from the surface (IEC 60335-2-9)		N/A
32	RADIATION, TOXICITY AND SIMILAR HAZARDS		P
	Appliance shall not emit harmful radiation, present a toxic or similar hazard due to their operation in normal use		P
	Compliance is checked by the limits or tests specified in part 2, if relevant		N/A
A	ANNEX A (INFORMATIVE) ROUTINE TESTS		N/A
	Description of routine tests to be carried out by the manufacturer		N/A
B	ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES		N/A
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance		N/A
	This annex does not apply to battery chargers		N/A
3.1.9	Appliance operated under the following conditions:		N/A
	-the appliance, supplied by its fully charged battery, operated as specified in relevant part 2		N/A
	-the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate		N/A
	-if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	If the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed		N/A
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable		N/A
5.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances		N/A
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage and polarity of the terminals		N/A
	The positive terminal indicated by symbol IEC 60417-5005 and the negative terminal by symbol IEC 60417-5006		N/A
7.6	Symbols 60417-5005 and IEC 60417-5006		N/A
7.12	The instructions give information regarding charging		N/A
	The instructions for appliances incorporating batteries intended to be replaced by the user includes required information		N/A
	Details about how to remove batteries containing materials hazardous to the environment given		N/A
7.15	Markings placed on the part of the appliance connected to the supply mains		N/A
8.2	Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment		N/A
	If the appliance can be operated without batteries, double or reinforced insulation required		N/A
11.7	The battery is charged for the period stated in the instructions or 24 h :		N/A
19.1	Appliances subjected to tests of 19.101, 19.102 and 19.103		N/A
19.101	Appliances supplied at rated voltage for 168 h, the battery being continually charged		N/A
19.102	For appliances having batteries that can be removed without the aid of a tool, short-circuit of the terminals of the battery, the battery being fully charged,		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
19.103	Appliances having batteries replaceable by the user supplied at rated voltage under normal operation with the battery removed or in any position allowed by the construction		N/A
21.101	Appliances having pins for insertion into socket-outlets have adequate mechanical strength, checked according to procedure 2 of IEC 68-2-32		N/A
	Part of the appliance incorporating the pins subjected to the free fall test, procedure 2, of IEC 60068-2-32, the number of falls being:		N/A
	- 100, the mass of part does not exceed 250 g		N/A
	- 50, the mass of part exceeds 250 g		N/A
	After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met		N/A
22.3	Appliances having pins for insertion into socket-outlets tested as fully assembled as possible		N/A
25.13	An additional lining or bushing not required for interconnection cords in class III appliances or class III constructions operating at safety extra-low voltage not containing live parts		N/A
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N/A
	For other parts, 30.2.2 applies		N/A
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		N/A
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A
	Test conditions as specified		N/A
	The value of p in Table C.1 is 2000 (IEC 60335-2-9)		N/A
D	ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS		N/A
	Applicable to appliances having motors that incorporate thermal motor protectors necessary for compliance with the standard		N/A
	Test conditions as specified		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
E	ANNEX E (NORMATIVE) NEEDLE-FLAME TEST		N/A
	Needle-flame test carried out in accordance with IEC 60695-11-5, with the following modifications:		N/A
7	Severities		N/A
	The duration of application of the test flame is 30 s \pm 1 s		N/A
9	Test procedure		N/A
9.1	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of figure 1		N/A
9.2	The first paragraph does not apply		N/A
	If possible, the flame is applied at least 10 mm from a corner		N/A
9.3	The test is carried out on one specimen		N/A
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		N/A
	The duration of burning not exceeding 30 s		N/A
	However, for printed circuit boards, the duration of burning not exceeding 15 s		N/A
F	ANNEX F (NORMATIVE) CAPACITORS		N/A
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:		N/A
1.5	Terminology		N/A
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	This subclause is applicable		N/A
1.6	Marking		N/A
	Items a) and b) are applicable		N/A
3.4	Approval testing		N/A
3.4.3.2	Table II is applicable as described		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
4.1	Visual examination and check of dimensions		N/A
	This subclause is applicable		N/A
4.2	Electrical tests		N/A
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only table 11 is applicable		N/A
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		N/A
	This subclause is applicable		N/A
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		N/A
	This subclause is applicable		N/A
4.14	Endurance		N/A
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	No visible damage		N/A
4.17	Passive flammability test		N/A
	This subclause is applicable		N/A
4.18	Active flammability test		N/A
	This subclause is applicable		N/A
G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS		N/A
	The following modifications to this standard are applicable for safety isolating transformers:		N/A
7	Marking and instructions		N/A
7.1	Transformers for specific use marked with:		N/A
	-name, trademark or identification mark of the manufacturer or responsible vendor		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	-model or type reference		N/A
17	Overload protection of transformers and associated circuits		N/A
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N/A
22	Construction		N/A
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		N/A
29	Clearances, creepage distances and solid insulation		N/A
29.1, 29.2 and 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		N/A
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1 there are no requirements for clearances or creepage distances		N/A
	For windings providing reinforced insulation, the distance specified in item 2c of table 13 of IEC 61558-1 is not assessed		N/A
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4 are applicable, if greater than the values specified in items 2a, 2c and 3 in table 13 of IEC 61558-1		N/A
H	ANNEX H (NORMATIVE) SWITCHES		N/A
	Switches comply with the following clauses of IEC 61058-1, as modified:		N/A
	-The tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N/A
	-Before being tested, switches are operated 20 times without load		N/A
8	Marking and documentation		N/A
	Switches are not required to be marked		N/A
	However, switches that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N/A
13	Mechanism		N/A
	The tests may be carried out on a separate sample		N/A
15	Insulation resistance and dielectric strength		N/A
15.1	Not applicable		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
15.2	Not applicable		N/A
15.3	Applicable for full disconnection and micro-disconnection		N/A
17	Endurance		N/A
	Compliance is checked on three separate appliances or switches		N/A
	For 17.2.4.4, the number of cycles is 10 000, unless otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335		N/A
	Switches for operation under no load and which can be operated only by a tool and switches operated by hand that are interlocked so that they cannot be operated under load, are not subjected to the tests		N/A
	However, switches without this interlock are subjected to the test of 17.2.4.4 for 100 cycles of operation		N/A
	Subclauses 17.2.2 and 17.2.5.2 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1		N/A
	Temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1		N/A
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		N/A
	This clause is applicable to clearances and creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in table 24		N/A
I	ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE		N/A
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		N/A
8	Protection against access to live parts		N/A
8.1	Metal parts of the motor are considered to be bare live parts		N/A
11	Heating		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
11.3	Temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N/A
11.8	Temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in table 3 for the relevant insulating material		N/A
16	Leakage current and electric strength		N/A
16.3	Insulation between live parts of the motor and its other metal parts not subjected to the test		N/A
19	Abnormal operation		N/A
19.1	The tests of 19.7 to 19.9 not carried out		N/A
19.101	Appliance operated at rated voltage with each of the following fault conditions:		N/A
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N/A
	- short circuit of each diode of the rectifier		N/A
	- open circuit of the supply to the motor		N/A
	- open circuit of any parallel resistor, the motor being in operation		N/A
	Only one fault simulated at a time, the tests carried out consecutively		N/A
22	Construction		N/A
22.101	For class I appliances incorporating a motor supplied by a rectifier circuit, the d.c. circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N/A
	Compliance checked by the tests specified for double and reinforced insulation		N/A
J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS		N/A
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		N/A
5.7	Conditioning of the test specimens		N/A
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.1	Cold		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	The test is carried out at -25°C		N/A
5.7.3	Rapid change of temperature		N/A
	Severity 1 is specified		N/A
5.9	Additional tests		N/A
	This subclause is not applicable		N/A
K	ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES		P
	The information on overvoltage categories is extracted from IEC 60664-1		P
	Overvoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N/A
L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		P
	Sequences for the determination of clearances and creepage distances		P
M	ANNEX M (NORMATIVE) POLLUTION DEGREE		P
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		P

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	The microenvironment determines the effect of pollution on the insulation, taking into account the microenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		P
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		P
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N/A
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected		N/A
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		P
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N/A
N	ANNEX N (NORMATIVE) PROOF TRACKING TEST		P
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:		P
7	Test apparatus		P
7.3	Test solutions		P
	Test solution A is used		P
10	Determination of proof tracking index (PTI)		P
10.1	Procedure		P
	The proof voltage is 100V, 175V, 400V or 600V:	175V	P
	The test is carried out on five specimens		P
	In case of doubt, additional test with proof voltage reduced by 25V, the number of drops increased to 100		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
10.2	Report		P
	The report stating if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A
O	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30		P
	Description of tests for determination of resistance to heat and fire		P
P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN WARM DAMP EQUABLE CLIMATES		N/A
	Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked WDaE		N/A
	Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked WdaE, if liable to be connected to a supply mains that excludes the protective earthing conductor		N/A
5	General conditions for the tests		N/A
5.7	The ambient temperature for the tests of Clauses 11 and 13 is 40 ⁺³ / ₀		N/A
7	Marking and instructions		N/A
7.1	The appliance marked with the letters WDaE		N/A
7.12	The instructions state that the appliance is to be supplied through a RCD having a rated residual operating current not exceeding 30 mA		N/A
	The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries		N/A
11	Heating		N/A
11.8	The values of Table 3 are reduced by 15 K		N/A
13	Leakage current and electric strength at operating temperature		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15	Moisture resistance		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
15.3	The value of t is 37 °C		N/A
16	Leakage current and electric strength		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
19	Abnormal operation		N/A
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS		N/A
	Description of tests for appliances incorporating electronic circuits		N/A
R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex		N/A
R.1	Programmable electronic circuits using software		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		N/A
R.2	Requirements for the architecture		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N/A
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:		N/A
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	- single channel with functional test		N/A
	- single channel with periodic self-test		N/A
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		N/A
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N/A
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate		N/A
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 is impaired		N/A
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N/A
R.2.2.7	Labels used for memory locations are unique		N/A
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N/A
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired		N/A
R.3	Measures to avoid errors		N/A
R.3.1	General		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied		N/A
	Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1		N/A
R.3.2	Specification		N/A
R.3.2.1	Software safety requirements:		N/A
	The specification of the software safety requirements includes the descriptions listed		N/A
R.3.2.2	Software architecture		N/A
R.3.2.2.1	The specification of the software architecture includes the aspects listed		N/A
	- techniques and measures to control software faults/errors (refer to R.2.2);		N/A
	- interactions between hardware and software;		N/A
	- partitioning into modules and their allocation to the specified safety functions;		N/A
	- hierarchy and call structure of the modules (control flow);		N/A
	- interrupt handling;		N/A
	- data flow and restrictions on data access;		N/A
	- architecture and storage of data;		N/A
	- time-based dependencies of sequences and data		N/A
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N/A
R.3.2.3	Module design and coding		N/A
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N/A
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N/A
R.3.2.3.2	Software code is structured		N/A
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N/A
	The module specification is validated against the architecture specification by static analysis		N/A
R.3.3.3	Software validation		N/A

IEC 60335-2-9			
Clause	Requirement - Test	Result - Remark	Verdict
	The software is validated with reference to the requirements of the software safety requirements specification		N/A
	Compliance is checked by simulation of:		N/A
	- input signals present during normal operation		N/A
	- anticipated occurrences		N/A
	- undesired conditions requiring system action		N/A

TABLE R.1 – GENERAL FAULT/ERROR CONDITIONS						
Component ¹⁾	Fault/error	Acceptable measures ^{2) 3)}	Definitions	Document reference for applied measure	Document reference for applied test	Verdict
1 CPU						N/A
1.1 Registers	Stuck at	Functional test, or periodic self-test using either: <ul style="list-style-type: none"> - static memory test, or - word protection with single bit redundancy 	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			N/A
1.2 VOID						N/A
1.3 Programme counter	Stuck at	Functional test, or Periodic self-test, or Independent time-slot monitoring, or Logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			N/A

IEC 60335-2-9						
Clause	Requirement - Test		Result - Remark			Verdict
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			N/A
4. Memory 4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			N/A
4.2 Variable memory	DC fault	Periodic static memory test, or word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			N/A
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
5 Internal data path	Stuck at DC fault	Word protection with single bit redundancy Comparison of redundant CPUs by either: - reciprocal comparison - independent hardware comparator	H.2.19.8.2 H.2.18.15 H.2.18.3			N/A
5.1 VOID						N/A
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A

IEC 60335-2-9						
Clause	Requirement - Test		Result - Remark			Verdict
6 External communication	Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single work, or Transfer redundancy, or Protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A
6.1 VOID						N/A
6.2 VOID						N/A
6.3 Timing	Wrong point in time Wrong sequence	Time-slot monitoring, or scheduled transmission Time-slot and logical monitoring, or Comparison of redundant communication channels by either: - reciprocal comparison - independent hardware comparator Logical monitoring, or time-slot monitoring, or Scheduled transmission (same options as for wrong point in time)	H.2.18.10.4 H.2.18.18 H.2.18.10.3 H.2.18.15 H.2.18.3 H.2.18.10.2 H.2.18.10.4 H.2.18.18			N/A
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check Comparison of redundant communication channels by either: - reciprocal comparison - independent hardware comparator	H.2.18.13 H.2.18.15 H.2.18.3			N/A
7.1 VOID						N/A
7.2 Analog I/O 7.2.1 A/D and D/A- converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A

IEC 60335-2-9						
Clause	Requirement - Test			Result - Remark		Verdict
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13			N/A
8 VOID						N/A
9 Custom chips ⁴⁾ e.g. ASIC, GAL, Gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6			N/A
<p>NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuit between signal lines.</p> <p>¹⁾ For fault/error assessment, some components are divided into their sub-functions.</p> <p>²⁾ For each sub-function in the table, the Table R.2 measure will cover the software fault/error.</p> <p>³⁾ Where more than one measure is given for a sub-function, these are alternatives.</p> <p>⁴⁾ To be divided as necessary by the manufacturer into sub-functions.</p>						

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict

Group/CENELEC Common Differences to IEC 60335-1:2010 (5th Edition)			
6.1	Delete "class 0" and "class 01"		N/A
7.10	Add:		P
	Devices used to start/stop operational functions of the appliance, if any, shall be distinguished from other manual devices by means of shape, or size, or surface texture, or position, etc.		P
	A tactile feedback or		P
	An audible and visual feedback		P
	NOTE Z1 The sound of the motor or sound of an actuator switching ON/OFF is regarded as audible feedback. The stopping of the typical function (e.g. stopping of the vibration on the body of the appliance or of a part of it) is regarded as tactile means.		P
	NOTE Z2 Devices used to start/stop operational functions mean devices that are operated by the user to start/stop the intended function of the appliance.		P
	A selector switch with an off-position clearly identifiable is allowed.		P
	An ON/OFF switch, if any, is considered a suitable device to stop operational functions. A plug is not considered a suitable device to stop operational functions, as it can be difficult to be reached by vulnerable persons.		P
7.12	The instructions shall include the substance of the following:		P
	This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.		P
7.12.Z1	The specific instructions related to the safe operation of this appliance (as given in 7.12 of this standard) shall be collated together in the front section of the user instructions. The height of the characters, measured on the capital letters, shall be at least 3mm		P

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
	These instructions shall also be available in an alternative format, e.g. on a website		P
7.14	Added:		P
	For the evaluation of legibility and clarity of safety warnings guidance can be found in IEC 62079		P
8.1.1	Replace the 3 rd paragraph by the following:		P
	Test probe B and probe 18 of EN 61032 are applied with a force not exceeding 1N, the appliance being in every possible position.....		P
8.2	Replace "test probe B of EN 61032" by "test probe of EN 61032"		P
	Replace "test probe B of EN 61032" by "test probe B and probe 18 of EN 61032 are"		P
11.8	Delete the sentence "The temperature rise of the..... " of the first paragraph.		P
15.1.2	Appliances with an automatic cord reel are tested with the cord in the most unfavourable position in such a way that the reeling of the wet cord may affect electrical insulation during operation. The cord shall not be dried before reeling		N/A
20	Replace Note 1 by the following requirement: For appliances having dangerous movable parts, due to their main function, e.g. the needle of a sewing machine, tools of kitchen machines of the blade of an electrical knife, full protection is not possible for performing their intended use.		N/A
20.2	Replaced the 1 st paragraph of compliance by: -a test probe that is similar to test probe B of EN 61032 but having a circular stop face with a diameter of 50 mm, instead of the non-circular face, applied with a force of 5N with the accessories and detachable cover removed and - test probe 18 of EN 61032, applied with a force of 2.5N on the appliance in a fully assembled situation.		N/A
24.1	Plugs and socket-outlets and other connecting devices of interconnection cords shall not be interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 6906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1, if direct supply to these parts from the supply mains could give rise to a hazard		N/A

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
24.1.3	Add NOTE Z1 For this test a thermostat or timer that is operating the relay or contactor is considered to be a switch		N/A
24.1.7	If the remote operation of the appliance is via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is EN 41003.		N/A
24.Z1	For motor running capacitors (IEC 60252-1 type P2) with a metallic enclosure having an overpressure fuse the flame testing of internal plastic parts supporting current carrying connections as required in 30.2.2 and 30.2.3.1 is not necessary.		N/A
25.6	Add Supply cords of single-phase portable appliances having a rated current not exceeding 16A shall be fitted with a plug complying with the following standard sheets of IEC/TR60083		P
26	Add after the second sentence in the first paragraph:		P
	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position unless they are held in place near the terminals independently of the solder.		N/A
29	Modification: Replace NOTE 5 by: Attention is drawn on the fact that for appliances intended for use at altitudes exceeding 2000 m, the altitude correction factors, relevant to the intended altitude, for clearances specified in Table A.2 of EN 60664-1:2007 may need to be taken into account.		N/A
29.3.Z1	Appliance shall be constructed so that if there is a possibility of damaging the insulation during installation, the insulation shall withstand the scratch and penetration test of 21.2.		N/A
Annex ZB	Deleted 7.1 and 29.3		N/A
Annex ZF	Table ZF.1 add EN 60335-2-97, drives for rolling shutters, awnings, blinds and similar equipment		N/A
Annex ZG	Add the following:		N/A
7.12.ZG	The instructions for appliances incorporating UVC emitters shall include the substance of the following:		N/A
	WARNING-This appliance contains a UV emitter. Do not stare at the light source.		N/A

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
32	Add the following:		N/A
	For appliances incorporating UV emitters the manufacturer's shall deliver a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N/A
	NOTE Examples of appliances that may incorporate UVC emitters are range hoods, air cleaners and finger nail hardeners		N/A

EN60335-2-9:2003/A12:2007			
Clause	Requirement – Test	Result – Remark	Verdict
11	HEATING		P
11.1	Addition:		P
	For ovens, rotary grills and cookers, compliance is also checked by the test of 11.Z101.		P
	For contact grills, waffle irons, sandwich makers, radiant grills, raclette grills, griddles, compliance is also checked by the test of 11.Z102.		N/A
	For breadmakers, compliance is also checked by the test of 11.Z103.		N/A
11.3	Addition:		P
	For flat surfaces, temperature rises are measured using the probe of figure Z101. The probe is applied with a force of $4N \pm 1N$ to the surface in such a way that the best possible contact between the probe and the surface is ensured.		P
11.8	Addition:		P
	The temperature rise of handles or grips and that of operational devices such as switches, keypads and knobs that are intended to be touched in normal use is measured as specified:		P
	The values for surfaces of handles, knobs, grips and similar parts which are held for short periods in table 3 apply.		P
	Add the following new subclauses:		P
11.Z101	Ovens, rotary grills and cookers are placed as specified in 11.2. The appliance is supplied at rated power and operated under normal operation.		N/A

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
	All heating units that can be connected to the supply mains at the same time during normal use are switched on.		N/A
	Ovens are operated without accessories.		N/A
	During the test, the temperature rise of surfaces shall not exceed the values specified in table Z101.		N/A
	Ovens having settings higher than 240°C are also operated at the maximum setting until steady state conditions are established or for 60min, whichever is shorter. The temperature rise limits of table Z101 for top surfaces and door surfaces are increased by 10K.		N/A
11.Z102	For contact grills, waffle irons, sandwich makers, radiant grills, raclette grills and griddles, the temperature rise limits for top surfaces in table Z101 apply.		P
	Temperature rises are not measured on the specified surfaces.		P
11.Z103	For breadmakers, the temperature rise limits for other surface in table Z101 apply.		N/A

EN60335-2-9:2003/A13:2010			
Clause	Requirement – Test	Result – Remark	Verdict
7	MARKING AND INSTRUCTIONS		P
7.1	Deleted the paragraphs "cookers, portable ovens ... CAUTION: hot surface."		P
	(Addition:) When the provisions of footnote ^b to Table Z101 apply, the appliance shall be marked with:		P
	- Symbol IEC 60417-5041		P
	- or with the substance of the following "CAUTION: Hot surface."		N/A
	The symbol or the warning shall be put on the surface of the appliance having the highest temperature and shall be visible during normal operation.		P

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
7.10	(Addition:) Devices used to start/stop operational functions of the appliance, if any, shall be distinguished from other manual devices by means of shape, or size, or surface texture, or position, etc.		P
	A tactile or and audible and visual feedback shall give an indication that the device has been operated.		P
7.12	Deleted the paragraph "The instructions for appliances having accessible metal surface ... the instruction shall state that the surfaces are liable to get hot during use."		P
	(Addition:) - This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.		P
	Children shall not play with the appliance.		P
	Cleaning and user maintenance shall not be made by children unless they are older than 8 and supervised.		P
7.12.Z101	(Addition:) The specific instructions related to the safe operation of this appliance (as given in 7.12) shall be collated together in the front section of the user instructions.		P
	The height of the characters, measured on the capital letters, shall be at least 4 mm.		P
	These instructions shall also be available in an alternative format (e.g. on a website)		P
7.14	(Replacement:) The height of symbol IEC 60417-5041 shall be at least 12 mm.		P
8	PROTECTION AGAINST ACCESS TO LIVE PARTS		P
8.1.1	(Replacement:) Test probe B and probe 18 of EN 61032 are applied: no contact with live parts		P

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
8.2	(Replacement:) Test probe B and probe 18 of EN 61032 are applied: only possible to touch parts separated from live parts by double or reinforced insulation		P
11	HEATING		P
11.1	(Replacement:) For ovens, rotary grills, rotisseries and cookers, compliance is also checked by the test of 11.Z101		N/A
	For contact grills, waffle irons, sandwich makers, radiant grills, raclette grills, griddles, barbecues, hot plates, candy floss, pop corn makers, compliance is also checked by the test of 11.Z102		P
	For bread makers and food dehydrators, compliance is also checked by the test of 11.Z103		N/A
	For toasters, compliance is also checked by the test of 11.Z104		N/A
	For roasters, compliance is also checked by the test of 11.Z105		N/A
	For all other types of appliances, compliance is checked by submitting the appliance to the tests of the nearest mentioned relevant type of appliance.		N/A
11.8	Deleted the addition in A12.		P
11.101	Deleted this sub-clause		P
11.Z101	(Replacement:) Ovens, rotary grills, rotisseries and cookers are supplied at rated power and operated under normal operation.....:		N/A
	All heating units that can be connected to the supply mains at the same time during normal use are switched on.		N/A
	Ovens are operated without accessories.		N/A
	Temperature rises are not measured on the following surfaces:		N/A
	- surfaces on the oven door within 10 mm from the edge of the door;		N/A
	- surfaces around the oven door within 10 mm from the left right or lower edge of the door, or 25 mm from the upper edge of the door;		N/A
	- surfaces within 25 mm of vents;		N/A

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
	A- underside surfaces that are not accessible with test probe 41 of EN 61032;		N/A
	- the rear surfaces of appliances which, according to the instruction, shall be placed against a wall; and are not accessible with test probe 41 of EN 61032;		N/A
	- surfaces within 25 mm from the level of the top surface of cookers when the hotplate is in operation.		N/A
	During the test, the temperature rise of surfaces shall not exceed the values specified in Table Z101.		N/A
11.Z102	(Replacement: For contact grills, waffle irons, sandwich makers, radiant grills, raclette grills and griddles, barbecues, hot plates, candy floss, pop corn makers, the temperature rise limits in Table Z101 apply.		P
	The appliance is supplied at rated power and operated under normal operation		P
	Temperature rises are not measured on:		P
	- surfaces within 25 mm in all direction of the hot functional surface;		P
	- surfaces within 25 mm from the ventilation openings;		P
	- underside surfaces that are not accessible with test probe 41 of EN 61032.		P
11.Z103	(Replacement: For breadmakers and food dehydrators, the temperature rise limits in Table Z101 apply.		N/A
	The appliance is supplied at rated power and operated under normal operation		N/A
	Temperature rises are not measured on:		N/A
	- surfaces within 25 mm from the edge of the lid;		N/A
	- surfaces within 25 mm from the ventilation openings;		N/A
	- underside surfaces that are not accessible with test probe 41 of EN 61032		N/A

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
11.Z104	(Addition:) For toasters, the temperature rise limits in Table Z101 apply.		N/A
	The appliance is operated for three cycles at rated power and operated under normal operation.....:		N/A
	Temperature rises are not measured on:		N/A
	- the top side of top loaded appliances and surfaces within 25 mm below the top surface;		N/A
	- surfaces within 25 mm in all direction of the hot functional surface;		N/A
	- surfaces within 25 mm from the ventilation openings;		N/A
	- underside surfaces that are not accessible with test probe 41 of EN 61032		N/A
11.Z105	(Addition:) For roasters, the temperature rise limits in Table Z101 apply.		N/A
	The appliance is supplied at rated power and operated under normal operation		N/A
	Temperature rises are not measured on:		N/A
	- the lids;		N/A
	- surfaces within 25 mm from the edge of the lid;		N/A
	- surfaces within 25 mm from the ventilation openings		N/A
	- underside surfaces that are not accessible with probe 41 of EN 61032.		N/A
20	STABILITY AND MECHANICAL HAZARDS		P
20.2	(Addition:) Appliances are fully assembled as in normal operation without any parts removed.		P
	(Replacement:) Compliance is checked by inspection, by the tests of 21.1 and by means of:		P

IEC 60335-2-9			
Clause	Requirement + Test	Result - Remark	Verdict
	- a test probe that is similar to test probe B of EN 61032 but having a circular stop face with a diameter of 50 mm, instead of the non circular face, applied with a force of 5 N; and		P
	- test probe 18 of EN 61032, applied with a force of 2,5 N.		P
22	CONSTRUCTION		P
22.12	(Addition:) Hazard including an ingestion or a choking hazard for vulnerable people.		P

EN 60335-1: 2012/A11: 2014			
7	MARKING AND INSTRUCTIONS (EN 60335-1/A11)		P
7.1	(Replacement:) In NOTE Z1, replace "IEC 82079-1" by "EN 82079-1".		N/A
ZF	ANNEX ZF (INFORMATIVE) CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD(EN 60335-1/A11)		N/A
	(Replacement:) In Table ZF.1 – List of standards under CLC/TC 61, replace line of EN 60335-2-38		N/A

Annex EN 62233:2008			
Clause	Requirement + Test	Result - Remark	Verdict
EMF- ELECTROMAGNETICS FIELDS			
	The tested product also complies with the requirements of EN 62233:2008		P
	Limit100%	Measured max. :1.216%	P

IEC 60335-2-9

10.1	TABLE: Power input deviation					P
Input deviation of/at:	P rated (W)	P measured (W)	dP (W, %)	Required dP (W, %)	Remark Current (A)	
230V (9905WS102)	1500	1420	-5.3%	+5% -10%	--	
230V (model: 9905WE082)	1200	1125	-6.3%	+5% -10%	--	
230V (model: 9905WC082)	1200	1122	-6.5%	+5% -10%	--	
230V (model: 9905WC060)	900	868	-3.6%	+5% -10%	--	
230V (model: 9905WS040)	650	614	-5.5%	+5% -10%	--	

10.2	TABLE: Current deviation					N/A
Current deviation of/at:	I rated (A)	I measured (A)	dI (A, %)	Required dI (A, %)	Remark	

Supplementary information:

11.8-1	TABLE: Heating test, thermocouple measurements (For model 9905WS102)		P
	Test voltage (V).....:	268	—
	Test wattage (W)	$1500 \times (240/230)^2 \times 1.15 = 1878.3$	—
	Ambient t1 (°C)	24.6	—
	Ambient t2 (°C)	23.5	—
Thermocouple locations		Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)
Supply cord		36.7	50
Internal wire(T200)		69.1	175
Ambient of energy regulator (T250)		115.2	225
Ambient of thermal link		89.5	For Ref.
Fibreglass tube (T200)		77.5	175
Neon lamp cover		22.7	For Cl.30
Knob of energy regulator		8.9	60

IEC 60335-2-9

Mini pan Handle	24.3	50
Metal enclosure	48.6	For Ref.
Test floor	31.0	65
Test wall	62.6	65
Cord anchorage	30.7	For Cl.30

11.8-2	TABLE: Heating test, thermocouple measurements (For model 9905WC082)		P
	Test voltage (V).....:	265	—
	Test wattage (W)	$1200 \times (240/230)^2 \times 1.15 = 1502.6$	—
	Ambient t1 (°C)	23.2	—
	Ambient t2 (°C)	24.0	—
Thermocouple locations		Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)
Supply cord		35.1	50
Internal wire (T200)		62.3	175
Ambient of thermostat (T180)		83.8	155
Ambient of switch (T85)		35.5	60
Fibreglass tube(T200)		53.3	175
Switch knob		28.3	60
Mini pan Handle		22.6	50
Metal enclosure		23.8	For Ref.
Plastic stand		12.4	For Cl.30
Test floor		29.4	65
Test wall		57.6	65
Cord anchorage		18.0	For Cl.30

11.8-3	TABLE: Heating test, thermocouple measurements (For model 9905WC060)		P
	Test voltage (V).....:	263	—
	Test wattage (W)	$900 \times (240/230)^2 \times 1.15 = 1127$	—
	Ambient t1 (°C)	22.8	—

IEC 60335-2-9

	Ambient t2 (°C)	24.1	—
Thermocouple locations	Max. temperature rise measured, dT (K)	Max. temperature rise limit, dT (K)	
Supply cord	41.6	50	
Internal wire (T200)	66.0	175	
Ambient of thermostat (T180)	116.8	155	
Ambient of switch (T85)	50.5	60	
Fibreglass tube (T200)	79.9	175	
Switch knob	30.8	60	
Mini pan Handle	29.3	50	
Metal enclosure	36.3	For Ref.	
Plastic stand	17.3	For Cl.30	
Test floor	15.7	65	
Test wall	42.1	65	
Cord anchorage	25.1	For Cl.30	

11.8-4	TABLE: Heating test, thermocouple measurements (For model 9905WS040)		P
	Test voltage (V)	267	—
	Test wattage (W)	$650 \times (240/230)^2 \times 1.15 = 813.9$	—
	Ambient t1 (°C)	24.2	—
	Ambient t2 (°C)	22.3	—
Thermocouple locations	Max. temperature rise measured, dT (K)	Max. temperature rise limit, dT (K)	
Supply cord	40.0	50	
Internal wire (T200)	76.0	175	
Ambient of energy regulator (T250)	106.4	225	
Ambient of thermal link	86.4	For Ref.	
Fibreglass tube (T200)	87.0	175	
Neon lamp cover	20.1	For Cl.30	
Knob of energy regulator	12.2	60	
Mini pan Handle	18.3	50	
Metal enclosure	39.0	Ref	

IEC 60335-2-9		
Test floor	33.1	65
Test wall	62.5	65
Cord anchorage	23.9	For Cl.30

11.Z102-1	TABLE: Heating test, thermocouple measurements (For model 9905WS040)		P
	Test voltage (V).....:	252.2	—
	Ambient t1 (°C)	17.3	—
	Ambient t2 (°C)	17.8	—
Thermocouple locations		Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)
Function surface around 25mm		41.5	45
Function surface around 25mm		41.1	45
Side surface		36.7	45
Side surface		38.6	45
Button around 25mm		42.6	45
Button around 25mm		38.0	45

11.Z102-2	TABLE: Heating test, thermocouple measurements (For model 9905WC060)		P
	Test voltage (V).....:	243.7	—
	Ambient t1 (°C)	18.0	—
	Ambient t2 (°C)	18.8	—
Thermocouple locations		Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)
Function surface around 25mm		28.7	45
Function surface around 25mm		28.9	45
Underside surface		26.4	45
Underside surface		24.7	45
Button around 25mm		26.3	45
Button around 25mm		26.4	45

IEC 60335-2-9

11.Z102-3	TABLE: Heating test, thermocouple measurements (For model 9905WE082)		P
	Test voltage (V).....:	241.6	—
	Ambient t1 (°C)	20.1	—
	Ambient t2 (°C)	20.6	—
Thermocouple locations		Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)
Function surface around 25mm		25.0	45
Function surface around 25mm		26.0	45
Underside surface		24.5	45
Underside surface		25.3	45
Button around 25mm		25.5	45
Button around 25mm		25.5	45

11.Z102-4	TABLE: Heating test, thermocouple measurements (For model 9905WC082)		P
	Test voltage (V).....:	243.5	—
	Ambient t1 (°C)	19.0	—
	Ambient t2 (°C)	19.9	—
Thermocouple locations		Max. temperature rise measured, dT (K)	Max.temperature rise limit, dT (K)
Function surface around 25mm		29.2	45
Function surface around 25mm		29.3	45
Underside surface		23.4	45
Underside surface		27.3	45
Button around 25mm		25.3	45
Button around 25mm		25.0	45

11.Z102-5	TABLE: Heating test, thermocouple measurements (For model 9905WS102)		P
	Test voltage (V).....:	247.2	—
	Ambient t1 (°C)	16.7	—
	Ambient t2 (°C)	17.2	—

IEC 60335-2-9

Thermocouple locations	Max. temperature rise measured, dT (K)	Max. temperature rise limit, dT (K)
Function surface around 25mm	36.3	45
Function surface around 25mm	37.9	45
Side surface	32.7	45
Side surface	35.3	45
Button around 25mm	35.6	45
Button around 25mm	35.9	45

13.2	TABLE: Leakage current		P
	Heating appliances: 1.15 x rated input (W) :	Same as 11.8	—
	Motor-operated and combined appliances: 1.06 x rated voltage (V) :	—	—
Leakage current between		I (mA)	Max. allowed I (mA)
Live part and accessible parts over reinforced insulation		0.03	0.35 peak
Live part and accessible parts over basic insulation		0.14	0.75

13.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
Live part and accessible parts over reinforced insulation		3000	No
Basic insulation and accessible parts over supplementary insulation		1750	No
Live part and accessible parts over basic insulation		1000	No

14	TABLE: Transient overvoltages					N/A
Clearance between:	CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)	

IEC 60335-2-9

Supplementary information:					

16.2	TABLE: Leakage current		P
	Single phase appliances: 1.06 x rated voltage (V)	1.06 x 240V = 254.4V	—
	Three phase appliances 1.06 x rated voltage divided by $\sqrt{3}$ (V)	—	—
Leakage current between		I (mA)	Max. allowed I (mA)
Live part and accessible parts over reinforced insulation		0.04	0.25
Live part and accessible parts over basic insulation		0.15	0.75

16.3	TABLE: Electric strength		P
Test voltage applied between:		Voltage (V)	Breakdown (Yes/No)
Live part and accessible parts over reinforced insulation		3000	No
Basic insulation and accessible parts over supplementary insulation		1750	No
Live part and accessible parts over basic insulation		1250	No

17	TABLE: Overload protection, thermocouple measurements		N/A
Temperature rise of part/at:		dT (K)	Max. dT (K)
Supplementary information:			

17	TABLE: Overload protection, resistance method		N/A
	Test voltage (V)		—
	Ambient, t1 (°C)		—
	Ambient, t2 (°C)		—

IEC 60335-2-9

Temperature of winding	R1 (Ω)	R2 (Ω)	dT (K)	T (°C)	Max. T (°C)
Supplementary information:					

19	Abnormal operation conditions						P
Operational characteristics		YES/NO	Operational conditions				
Are there electronic circuits to control the appliance operation?		No	N/A				
Are there "off" or "stand-by" position?		No	N/A				
The unintended operation of the appliance results in dangerous malfunction?		No	N/A				
Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.2	0.85 times rated input power	No hazard	N/A	N/A	N/A	N/A	P
19.3	1.24 times rated input power	No hazard	N/A	N/A	N/A	N/A	P
19.4	1.15 times rated input power	No hazard	N/A	N/A	N/A	N/A	P
19.5	1.15 times rated input power	No hazard	N/A	N/A	N/A	N/A	P
19.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.10	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.11.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.11.4.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A

IEC 60335-2-9							
----------------------	--	--	--	--	--	--	--

19.10X	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information:							

19.7	TABLE: Abnormal operation, locked rotor/moving parts					N/A
	Test voltage (V)					—
	Ambient, t1 (°C).....					—
	Ambient, t2 (°C).....					—
Temperature of winding		R1 (Ω)	R2 (Ω)	dT (K)	T (°C)	Max. T (°C)
Supplementary information:						

19.9	TABLE: Abnormal operation, running overload					N/A
	Test voltage (V)					—
	Ambient, t1 (°C)					—
	Ambient, t2 (°C)					—
Temperature of winding		R1 (Ω)	R2 (Ω)	dT (K)	T (°C)	Max. T (°C)
Supplementary information:						

19.13-1	TABLE: Abnormal operation, temperature rises (For model 9905WS102)			P	
Thermocouple locations		Max. temperature rise measured, dT (K)			Max. temperature rise limit, dT (K)
—		19.2	19.3	19.4	—
Neon lamp cover		22.2	23.4	22.5	For Cl.30
Cord anchorage		29.0	29.7	30.7	For Cl.30

IEC 60335-2-9				
Supply cord	34.7	36.1	47.0	150
Test floor	18.6	15.0	22.3	150
Test wall	48.3	80.0	115.4	150

19.13-2	TABLE: Abnormal operation, temperature rises (For model 9905WC082)				P
Thermocouple locations	Max. temperature rise measured, dT (K)			Max.temperature rise limit, dT (K)	
—	19.2	19.3	19.4	—	
Plastic enclosure / Plastic stand	8.8	10.9	21.4	For Cl.30	
Cord anchorage	15.1	18.1	19.0	For Cl.30	
Supply cord	34.2	40.5	64.8	150	
Test floor	5.7	8.7	9.8	150	
Test wall	31.7	39.5	74.8	150	

24.1	TABLE: Components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
Plug	Guangdong KaiHua Electric Appliance Co., Ltd	KH-9902	AC 250V, 16A	VDE 0620-1	VDE 40010410	
Alternative	MAINLAND ELECTRIC WIRE & CABLE CO., LTD.	ML-302	AC 250V, 16A	VDE 0620-1	VDE 40012805	
Alternative	Shenzhen Linoya Electronic Co. Ltd.	XYP-02L	AC 250V, 16A	VDE 0620-1	VDE 40015292	
Alternative	Sheng Yi Electrical Factory	SY-22	AC 250V, 16A	VDE 0620-1	VDE 40007744	
Alternative	Guangzhou Huan Qiu Electrical & Appliance Co. Ltd.	HQ-B301	AC 250V, 16A	VDE 0620-1	VDE 40002926	
UK Plug	KDJ Quality Electrical Co., Ltd.	KDJ 828	AC 250V, 13A	BS 1363-1	KM 54583	

IEC 60335-2-9					
Alternative	Guangdong Kai Hua Electric Appliance Co., Ltd	KH-9933	AC 250V, 13A	BS 1363-1	ASTA 1053
Alternative	Mainland Electric Wire & Cable Co., Ltd.	ML-313, ML-213	AC 250V, 13A	BS 1363-1	ASTA 876
Alternative	Dongguan City Sheng Yi Electrical Co., Ltd	SY-88	AC 250V, 13A	BS 1363-1	ASTA 1145
Supply cord	Guangdong KaiHua Electric Appliance Co., Ltd	H05RR-F	3G0.75mm ² (length < 2m)	VDE 0282-4	VDE 40015132
Alternative	Huizhou Mainland Electric Wire & Cable Co., Ltd.	H05RR-F	3G0.75mm ² (length < 2m)	VDE 0282-4	VDE 40026038
Alternative	Guangdong Rifeng Electrical Cable Co., Ltd.	H05RR-F	3G0.75mm ² (length < 2m)	VDE 0282-4	VDE 40015999
Alternative	Dong Guan Recheer Electric Wire & Cable Co., Ltd.	H05RR-F	3G0.75mm ² (length < 2m)	VDE 0282-4	VDE 40015173
Energy regulator (for models with "S")	Jiangmen Huahui Industrial Co. Ltd.	K-426	AC 250V, 13A, Tf185°C, T250, 3E4	EN 60730 -1 EN 60730-2-9	VDE 40006781
Alternative	IVY (Australia) Pty Ltd.	TA-018	AC 250V, 10A, Tf185°C, T250, 10E4	EN 60730 -1 EN 60730-2-9	VDE 40014613
Alternative	Foshan Gaoming Xite Electrical Co., Ltd.	KST201A	AC 250V, 10A, Tf185°C, T240, 4E4	EN 60730 -1 EN 60730-2-9	VDE 40012302
Alternative	Guangdong Shunde Zhongbao Thermostat Technology Co., Ltd.	KST205C, KST205D	AC 250V, 10A, Tf185°C, T250, 35E3	EN 60730 -1 EN 60730-2-9	TUV R50013574
Thermostat (for models with "E" or "C")	KA WO Electrical Co., Ltd.	TI-20	AC 250V, 13A, Tf180°C, T180, 2E4	EN 60730-1 EN 60730-2-9	VDE 115607

IEC 60335-2-9					
Alternative	Jiangmen Xinhui Huatong Electrical & Electrical Appliances Co., Ltd.	TA-07	AC 250V, 10A, Tf180°C, T230, 1E4	EN 60730-1 EN 60730-2-9	TUV R50084246
Alternative	Foshan Gaoming Xi Te Electrical Co., Ltd.	KSD302	AC 250V, 10A, Tf180°C, T250, 2E4	EN 60730-1 EN 60730-2-9	TUV R50219396
Alternative	Foshan Shunde Kaiyi Thermostat Co. Ltd.	KSD301	AC 250V, 10A, Tf180°C, T280, 3E4	EN 60730-1 EN 60730-2-9	VDE 40032608
Alternative	Linton Electrical Ltd.	T-18H	AC 250V, 10A, Tf180°C, T210, 3E4	EN 60730-1 EN 60730-2-9	VDE 40009142
Alternative	Guangdong Shunde Zhongbao Thermostat Technology Co., Ltd.	KSD301-C	AC 250V, 10A, Tf180°C, T250, 1E4	EN 60730-1 EN 60730-2-9	TUV R50114187
Thermal link (for models with "S")	NEC SCHOTT Components Corporation	SF 169 E	AC 250V, 10A, Tf172°C	EN 60691	VDE 40006568
Alternative	Aupo Electronics Ltd.	BF 172.	AC 250V, 10A, Tf172°C	EN 60691	VDE 40005418
Alternative	Foshan Gaoming Xi Te Electrical Co., Ltd.	RY-01E172	AC 250V, 10A, Tf172°C	EN 60691	TUV R50129664
Switch(for models with "C")	Shenzhen Baokezhen Electronics Co., Ltd.	SC768-1VAH, SC768	AC 250V, 6(1)A, T85, 10E3	EN 61058-1	VDE 40026049
Alternative	Guangzhou Taiheng Electric Appliance Co., Ltd.	TH1	AC 250V, 15A, T85, 1E4	EN 61058-1	TUV R50150473
Alternative	Zhejiang Guanbao Electronic Co., Ltd.	XCK-017	AC 250V, 10(4)A, T125, 10E3	EN 61058-1	TUV R50185880
Alternative	Ningbo Yinzhou Lihe Switch Factory	RL3	AC 250V, 6(2)A, T125, 10E3	EN 61058-1	VDE 40028540
Alternative	Zhe Jiang Bei Er Jia Electronic Co., Ltd.	PS8A	AC 250V, 6(4)A, T105, 10E3	EN 61058-1	VDE 40027141

IEC 60335-2-9					
Heating element (for 9905WS040, 9905WS041)	Haoyuan electric heating appliance Co., Ltd	05104	AC 220-240V, 650W	EN 60335-1 EN 60335-2-9	Tested with appliance
Heating element (for 9905WE060, 9905WE061)	Haoyuan electric heating appliance Co., Ltd	05306	AC 220-240V, 900W	EN 60335-1 EN 60335-2-9	Tested with appliance
Heating element (for 9905WC060, 9905WC061)	Haoyuan electric heating appliance Co., Ltd	05206	AC 220-240V, 900W	EN 60335-1 EN 60335-2-9	Tested with appliance
Heating element (for 9905WS060, 9905WS061)	Haoyuan electric heating appliance Co., Ltd	05106	AC 220-240V, 900W	EN 60335-1 EN 60335-2-9	Tested with appliance
Heating element (for 9905WE080, 9905WE081, 9905WE082)	Haoyuan electric heating appliance Co., Ltd	05308	AC 220-240V, 1200W	EN 60335-1 EN 60335-2-9	Tested with appliance
Heating element (for 9905WC080, 9905WC081, 9905WC082)	Haoyuan electric heating appliance Co., Ltd	05208	AC 220-240V, 1200W	EN 60335-1 EN 60335-2-9	Tested with appliance
Heating element (for 9905WS080, 9905WS081, 9905WS082)	Haoyuan electric heating appliance Co., Ltd	05108	AC 220-240V, 1200W	EN 60335-1 EN 60335-2-9	Tested with appliance
Heating element (for 9905WS100, 9905WS101, 9905WS102)	Haoyuan electric heating appliance Co., Ltd	05110	AC 220-240V, 1500W	EN 60335-1 EN 60335-2-9	Tested with appliance
Fibreglass tube	GUANGDONG FOSHAN CITY SHUNDE QIAOCHENG INSULATION MATERIAL CO LTD	2753-3	600V, 200°C	--	UL E238534

IEC 60335-2-9

Heat shrinkable tube	CHANGYUAN ELECTRONICS GROUP CO LTD	CB-HFT	600V, 125°C	--	UL E180908
Alternative	DONGGUAN SALIPT CO LTD	SALIPT S901-600	600V, 125°C	--	UL E209436
Plastic knob of Mini pan	KOREA PETROCHEMICAL IND CO LTD	HJ4112	PP, HB	EN 60335-1 EN 60335-2-9	Tested with appliance UL E93311
Plastic knob of energy regulator (for models with "S")	SABIC INNOVATIVE PLASTICS CHINA CO LTD	FR65 (GG)	PC, V-0	EN 60335-1 EN 60335-2-9	Tested with appliance
Neon lamp cover (for models with "S")	SABIC INNOVATIVE PLASTICS CHINA CO LTD	FR65 (GG)	PC, V-0	EN 60335-1 EN 60335-2-9	Tested with appliance
Bottom plastic enclosure and plastic stand (for models with "E" or "C")	KOREA PETROCHEMICAL IND CO LTD	HJ4112	PP, HB	EN 60335-1 EN 60335-2-9	Tested with appliance UL E93311
Internal wire	Interchangeable	3122	18AWG/22AWG, 300V, 200°C	--	UL approved

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

Other Components

Components which are required for performance purposes and/or not directly addressed by a component standard or product standard: capacitors, resistors, mosfets, internal wire, PCB, etc.

Object/part No.	Type/ model (optional)	Technical data	Compliance to
Internal wire	3122	18AWG/22AWG, 300V, 200°C	UL approved

28.1	TABLE: Threaded part torque test			P
Threaded part identification	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)	
Screw for fixing metal enclosure	3.9	II	1.2	
Screw for earthing continuity	3.7	II	1.2	

IEC 60335-2-9

29.1	TABLE: Clearances						P
	Overvoltage category..... :				II		—
		Type of insulation:					
Rated impulse voltage (V):	Min. cl (mm)	Basic (mm)	Supplementary (mm)	Reinforced (mm)	Functional (mm)	Verdict / Remark	
330	0,2* / 0,5 / 0,8**	N/A	N/A	N/A	N/A	N/A	
500	0,2* / 0,5 / 0,8**	N/A	N/A	N/A	N/A	N/A	
800	0,2* / 0,5 / 0,8**	N/A	N/A	N/A	N/A	N/A	
1 500	0,5 / 0,8** / 1,0***	N/A	N/A	N/A	N/A	N/A	
2 500	1,5 / 2,0***	4.5	8.4	N/A	3.3	P	
4 000	3,0 / 3,5***	N/A	N/A	8.4	N/A	P	
6 000	5,5 / 6,0***	N/A	N/A	N/A	N/A	N/A	
8 000	8,0 / 8,5***	N/A	N/A	N/A	N/A	N/A	
10 000	11,0 / 11,5***	N/A	N/A	N/A	N/A	N/A	
Supplementary information:							
*) For tracks on printed circuit boards if pollution degree 1 and 2							
**) For pollution degree 3							
***) If the construction is affected by wear, distortion, movement of the parts or during assembly							
Functional: cl=cr=3.3mm measured between L/N polarities of thermostat.							
Basic: cl=cr=4.5mm measured from live part of heating elements and earthed metal enclosure.							
Supplementary: cl=cr=8.4mm mm measured from internal wire to accessible plastic part.							
Reinforced: cl=cr=8.4mm measured from live part to accessible plastic part.							

29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)	Creepage distance (mm) Pollution degree										
	1	2			3			Type of insulation			
		Material group			Material group						
		I	II	IIIa/IIIb	I	II	IIIa/IIIb ^{*)}	B ^{**)}	S ^{**)}	R ^{**)}	Verdict
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9		—	—	N/A
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9	—		—	N/A

IEC 60335-2-9

≤50	0,36	1,2	1,7	2,4	3,0	3,4	3,8	—	—		N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4		—	—	N/A
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4	—		—	N/A
125	0,56	1,5	2,1	3,0	3,8	4,2	4,8	—	—		N/A
250	0,56	1,25	1,8	2,5	3,2	3,6	4,0	5.5	—	—	P
250	0,56	1,25	1,8	2,5	3,2	3,6	4,0	—	8.4	—	P
250	1,12	2,5	3,6	5,0	6,4	7,2	8,0	—	—	8.4	P
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3		—	—	N/A
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—		—	N/A
400	2,0	4,0	5,6	8,0	10,0	11,2	12,6	—	—		N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0		—	—	N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—		—	N/A
500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—		N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0		—	—	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—		—	N/A
>630 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—		N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5		—	—	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—		—	N/A
>800 and ≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	—	—		N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0		—	—	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—		—	N/A
>1000 and ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0	—	—		N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0		—	—	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—		—	N/A
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—		N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0		—	—	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—		—	N/A
>1600 and ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0	—	—		N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0		—	—	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—		—	N/A
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—		N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0		—	—	N/A

IEC 60335-2-9

>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—	—	—	N/A
>2500 and ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0	—	—	—	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—	—	—	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—	—	—	N/A
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—	—	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—	—	—	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—	—	—	N/A
>4000 and ≤5000	32,0	40,0	56,0	80,0	100,0	112,0	126,0	—	—	—	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—	—	—	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—	—	—	N/A
>5000 and ≤6300	40,0	50,0	72,0	100,0	126,0	142,0	160,0	—	—	—	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—	—	—	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—	—	—	N/A
>6300 and ≤8000	50,0	64,0	90,0	126,0	160,0	180,0	200,0	—	—	—	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—	—	—	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	—	—	—	N/A
>8000 and ≤10000	64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—	—	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—	—	—	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	—	—	—	N/A
>10000 and ≤12500	80,0	100,0	142,0	200,0	250,0	280,0	320,0	—	—	—	N/A

Supplementary information:

*) Material group IIIb is allowed if the working voltage does not exceed 50 V

**) B = Basic insulation, S = Supplementary insulation, R = Reinforced insulation

Remark:

See table 29.1

29.2	TABLE: Creepage distances, functional insulation				P
Working voltage (V)	Creepage distance (mm) Pollution degree				
	1	2	3		
		Material group	Material group		

IEC 60335-2-9

		I	II	IIIa/IIIb	I	II	IIIa/IIIb*)	Verdict / Remark
≤10	0,08	0,4	0,4	0,4	1,0	1,0	1,0	N/A
50	0,16	0,56	0,8	1,0	1,4	1,6	1,8	N/A
125	0,25	0,71	1,0	1,4	1,8	2,0	2,2	N/A
250	0,42	1,0	1,4	2,0	2,5	2,8	3,2	P
400	0,75	1,6	2,2	3,2	4,0	4,5	5,0	N/A
500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	N/A

Supplementary information:

*) Material group IIIb is allowed if the working voltage does not exceed 50 V

See table 29.1

30.1	TABLE: Ball pressure			P
Part Name	Test temperature (°C)	Impression diameter (mm)	Allowed impression diameter (mm)	
Neon lamp cover	75	1.5	2.0	
Cord anchorage	75	1.4	2.0	
Power switch knob	75	1.3	2.0	
power switch	125	1.1	2.0	

IEC 60335-2-9

Thermostat	156.8	0.9	2.0
Plastic enclosure / Plastic stand / Mini pan handle	75	1.5	2.0

Remark:

(1): 75°C or 40°C + temp rise in cl.11 or 25°C + temp rise in cl.19 (the highest one)

(2): 125°C or 40°C + temp rise in cl.11 or 25°C + temp rise in cl.19 (the highest one)

30.2	TABLE: Glow-wire test							P
Part Name / Location	Test Temp. (550 / 650 / 750 / 850 / 960)	Ignition of test sample (Y/N)	Ignition of tissue paper (Y/N)	ti (s)	te (s)	hf (mm)	Remark *	Result (P/F)
Neon lamp cover	650	N	N	---	--	---	---	P
Cord anchorage	550	N	N	---	--	---	---	P
Power switch knob	550	N	N	---	--	---	---	P
power switch	750	Y	N	1	30	15	---	P
Thermostat	750	N	N	---	--	---	---	P
Energy regulator	750	N	N	---	--	---	---	P
Plastic enclosure / Plastic stand / Mini pan handle	550	N	N	---	--	---	---	P
Remark: Ti = the time between glow wire touched the material and the material ignite Te= the time between glow wire touched the material and the flame extinguished;								

30.2	TABLE: resistance to heat, fire and tracking, needle-flame test					N
Part Name	Application Time	Ignition of sample*? Yes / No	tb	Ignition of wrapping tissue Yes / No	Remark **	Result (P/F)
Remark: tb – Duration of burning. The duration of burning (tb) shall not exceed 30 s. However, for printed circuit boards, it shall not exceed 15 s.						

IEC 60335-2-9

Annex N	TABLE: proof tracking test				P
Part	tracking test (V)		other test	result	
	175	250			
Neon lamp cover	x	--	--	P	
Cord anchorage	x	--	--	P	
Power switch knob	x	--	--	P	
power switch	x	--	--	P	
Thermostat	x	--	--	P	
Energy regulator	x	--	--	P	
Plastic enclosure / Plastic stand / Mini pan handle	x	--	--	P	

-- End of test report --