



<b>TEST REPORT</b> <b>IEC 62133-2</b> <b>Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications –</b> <b>Part 2: Lithium systems</b>	
<b>Report Number</b> ..... :	SHES200701417501
<b>Date of issue</b> ..... :	2020-08-24
<b>Total number of pages</b> .....	25 Pages
<b>Name of Testing Laboratory preparing the Report</b> .....	SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
<b>Applicant's name</b> .....	
<b>Address</b> ..... :	
<b>Test specification:</b>	
<b>Standard</b> .....	IEC 62133-2:2017
<b>Test procedure</b> .....	SGS-CSTC
<b>Non-standard test method</b> .....	N/A
<b>Test Report Form No.</b> .....	IEC62133_2A
<b>Test Report Form(s) Originator</b> .... :	DEKRA
<b>Master TRF</b> .....	Dated 2017-08-10
<b>Copyright © 2017 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</b>	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
<b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b>	
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

<b>Test item description</b> .....	Rechargeable Lithium ion Battery Pack	
<b>Trade Mark</b> .....	-	
<b>Manufacturer</b> .....	Same as applicant	
<b>Model/Type reference</b> .....	22.2V	
<b>Ratings</b> .....	Rated Voltage: 22,2 V Rated Capacity: 2200 mAh(48,84 Wh)	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input type="checkbox"/> <b>Testing Laboratory:</b>	SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.	
<b>Testing location/ address</b> .....	588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China	
<b>Tested by (name, function, signature)</b> .....	Zic Zhang / Project Engineer	<i>Zic Zhang</i>
<b>Approved by (name, function, signature)</b> .....	Eric Wang / Project Reviewer	<i>Eric Wang</i>
<input type="checkbox"/> <b>Testing procedure: CTF Stage 1:</b>	N/A	
<b>Testing location/ address</b> .....		
<b>Tested by (name, function, signature)</b> .....		
<b>Approved by (name, function, signature)</b> .....		
<input type="checkbox"/> <b>Testing procedure: CTF Stage 2:</b>	N/A	
<b>Testing location/ address</b> .....		
<b>Tested by (name + signature)</b> .....		
<b>Witnessed by (name, function, signature) .:</b>		
<b>Approved by (name, function, signature)</b> .....		
<input type="checkbox"/> <b>Testing procedure: CTF Stage 3:</b>	N/A	
<input type="checkbox"/> <b>Testing procedure: CTF Stage 4:</b>	N/A	
<b>Testing location/ address</b> .....		
<b>Tested by (name, function, signature)</b> .....		
<b>Witnessed by (name, function, signature) .:</b>		
<b>Approved by (name, function, signature)</b> .....		
<b>Supervised by (name, function, signature) :</b>		



<p><b>List of Attachments (including a total number of pages in each attachment):</b> Attachment 1: Photos.</p>	
<p><b>Summary of testing:</b> The sample(s) tested complies with the requirements of IEC 62133-2: 2017.  When determining the test conclusion, the Measurement Uncertainty of test has been considered.  Remark: Battery was considered and tested according to standard in this report.</p>	
<p><b>Tests performed (name of test and test clause):</b></p> <p><input type="checkbox"/> 5.2 Insulation resistance</p> <p><input type="checkbox"/> 7.2.1 Continuous charging at constant voltage (cells)</p> <p><input checked="" type="checkbox"/> 7.2.2 Case stress at high ambient temperature (battery)</p> <p><input type="checkbox"/> 7.3.1 External short circuit (cell)</p> <p><input checked="" type="checkbox"/> 7.3.2 External short circuit (battery)</p> <p><input checked="" type="checkbox"/> 7.3.3 Free fall</p> <p><input type="checkbox"/> 7.3.4 Thermal abuse (cells)</p> <p><input type="checkbox"/> 7.3.5 Crush (cells)</p> <p><input checked="" type="checkbox"/> 7.3.6 Over-charging of battery</p> <p><input type="checkbox"/> 7.3.7 Forced discharge (cells)</p> <p><input checked="" type="checkbox"/> 7.3.8 Mechanical tests (batteries)</p> <p><input type="checkbox"/> 7.3.9 Design evaluation – Forced internal short circuit (cells)</p> <p><input type="checkbox"/> Annex D Measurement of the internal AC resistance for coin cells</p>	<p><b>Testing location:</b> SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. 588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China</p>
<p><b>Summary of compliance with National Differences (List of countries addressed):</b></p> <p><input checked="" type="checkbox"/> The product fulfils the requirements of EN 62133-2:2017.</p>	

**Copy of marking plate**

**Note 1: Battery pack with keyed external connector which prevents reverse polarity connections.**

**Note 2: YYYY for year, and MM for month.**

<b>Test item particulars</b> .....	--
<b>Classification of installation and use</b> .....	--
<b>Supply Connection</b> .....	--
<b>Recommend charging method declared by the manufacturer</b> .....	0,5C CC to 25,5V. Then CV to 0,05C
<b>Discharge current (0,2 It A)</b> .....	440 mA
<b>Specified final voltage</b> .....	16,5 V
<b>Upper limit charging voltage per cell</b> .....	4,25 V
<b>Maximum charging current</b> .....	1000 mA
<b>Charging temperature upper limit</b> .....	40 °C
<b>Charging temperature lower limit</b> .....	0 °C
<b>Polymer cell electrolyte type</b> .....	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
<b>Testing</b> .....	
<b>Date of receipt of test item</b> .....	2020-07-22
<b>Date (s) of performance of tests</b> .....	2020-07-22 to 2020-08-12
<b>General remarks:</b>	
<p>The test results presented in this report relate only to the object tested.          This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.          "(See Enclosure #)" refers to additional information appended to the report.          "(See appended table)" refers to a table appended to the report.</p> <p><b>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</b></p> <p><i>This document is issued by the Company under its General Conditions of service accessible at <a href="http://www.sgs.com/terms_and_conditions.htm">http://www.sgs.com/terms_and_conditions.htm</a> attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.</i></p> <p><i>Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.</i></p> <p><i>Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. This document cannot be reproduced except in full, without prior approval of the Company.</i></p>	

<b>Name and address of factory (ies).....: Same as applicant</b>	
<b>General product information and other remarks:</b>	
Product description:	Rechargeable Lithium ion Battery Pack
Model of pack:	22.2V
Designation of pack:	6INR19/66
Rated voltage:	22,2 V
Rated capacity:	2200 mAh
Maximum charge current:	1000 mA
Number of cells in battery pack:	Six cells in series
Model of cell:	ICR18650-2200mAh
Designation of cell:	INR19/66
Rated voltage of cell:	3,7 V
Rated capacity of cell:	2200 mAh

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>PARAMETER MEASUREMENT TOLERANCES</b>		P
	Parameter measurement tolerances		P
<b>5</b>	<b>GENERAL SAFETY CONSIDERATIONS</b>		P
<b>5.1</b>	<b>General</b>		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
<b>5.2</b>	<b>Insulation and wiring</b>		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No exposed metal surface	N/A
	Insulation resistance (MΩ)..... :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearance and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
<b>5.3</b>	<b>Venting</b>		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Cell: A pressure relief mechanism was used to release excessive internal pressure. Pack: Plastic enclosure secured by ultrasonic welding, aperture as the venting mechanism of battery.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief	Plastic enclosure was used to support cells, will not cause the battery to overheat during normal operation nor inhibit pressure relief.	P
<b>5.4</b>	<b>Temperature, voltage and current management</b>		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Protection board with temperature/voltage/current management	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	Protection board with temperature/voltage/current management	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	Charge and discharge instructions were provided.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5.5</b>	<b>Terminal contacts</b>		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current		P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short-circuit		P
<b>5.6</b>	<b>Assembly of cells into batteries</b>		P
5.6.1	General		P
	Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region		P
	This protection may be provided external to the battery such as within the charger or the end devices	The protection is within the battery	N/A
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions	Single battery pack without separate case	N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components added as appropriate and consideration given to the end-device application		N/A
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance		N/A
5.6.2	Design recommendation		P
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks	Charging voltage of the cell does not exceed 4,25 V.	P
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		P
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection		P
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		P
	It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage		P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system		P
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse		P
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product	The mechanical protection was provided by the battery case.	P
	The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer		P
	For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests		N/A
<b>5.7</b>	<b>Quality plan</b>		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Self declaration was submitted.	P
<b>5.8</b>	<b>Battery safety components</b>		P
	According annex F		P
<b>6</b>	<b>TYPE TEST AND SAMPLE SIZE</b>		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	Coin cells with resistance $\leq 3 \Omega$ (measured according annex D) are tested according table 1		N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and overdischarge protection		P
	When conducting the short-circuit test, consideration given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test		P
<b>7</b>	<b>SPECIFIC REQUIREMENTS AND TESTS</b>		P
<b>7.1</b>	<b>Charging procedure for test purposes</b>		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ , using the method declared by the manufacturer		P
	Prior to charging, the battery have been discharged at $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ at a constant current of 0,2 It A down to a specified final voltage		P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		P
	After stabilization for 1 h and 4 h, respectively, at ambient temperature of highest test temperature and lowest test temperature, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant voltage charging method		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>7.2</b>	<b>Intended use</b>		P
7.2.1	Continuous charging at constant voltage (cells)	Cells were certified according to IEC 62133-2: 2017	N/A
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer		N/A
	Results: No fire. No explosion. No leakage .....	(See appended table 7.2.1)	N/A
7.2.2	Case stress at high ambient temperature (battery)		P
	Oven temperature (°C) .....	70	—
	Results: No physical distortion of the battery case resulting in exposure of internal protective components and cells		P
<b>7.3</b>	<b>Reasonably foreseeable misuse</b>		P
7.3.1	External short-circuit (cell)	Cells were certified according to IEC 62133-2: 2017	N/A
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	Results: No fire. No explosion .....	(See appended table 7.3.1)	N/A
7.3.2	External short-circuit (battery)		P
	The batteries were tested until one of the following occurred: - 24 hours elapsed; or	Rapid decline in short circuit current, protective electronic circuit operate	P
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N/A
	A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test		P
	A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermistor	Single fault applies to Q8, F3	P
	Results: No fire. No explosion .....	(See appended table 7.3.2)	P
7.3.3	Free fall		P
	Results: No fire. No explosion		P
7.3.4	Thermal abuse (cells)	Cells were certified according to IEC 62133-2: 2017	N/A
	Oven temperature (°C) .....		—

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Results: No fire. No explosion		N/A
7.3.5	Crush (cells)	Cells were certified according to IEC 62133-2: 2017	N/A
	The crushing force was released upon: - The maximum force of 13 kN ± 0,78 kN has been applied; or		N/A
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: No fire. No explosion .....	(See appended table 7.3.5)	N/A
7.3.6	Over-charging of battery		P
	The supply voltage which is:		P
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or		N/A
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and		P
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		P
	Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10 °C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: No fire. No explosion .....	(See appended table 7.3.6)	P
7.3.7	Forced discharge (cells)	Cells were certified according to IEC 62133-2: 2017	N/A
	If the discharge voltage reaches the negative value of upper limit charging voltage within the testing duration, the voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	If the discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration, the test is terminated at the end of the testing duration		N/A
	Results: No fire. No explosion .....	(See appended table 7.3.7)	N/A
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration		P
	Results: No fire, no explosion, no rupture, no leakage or venting. ....	(See appended table 7.3.8.1)	P
7.3.8.2	Mechanical shock		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Results: No leakage, no venting, no rupture, no explosion and no fire.....:	(See appended table 7.3.8.2)	P
7.3.9	Design evaluation – Forced internal short-circuit (cells)	Cells were certified according to IEC 62133-2: 2017	N/A
	The cells complied with national requirement for .....		—
	The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached		N/A
	Results: No fire .....	(See appended table 7.3.9)	N/A
<b>8</b>	<b>INFORMATION FOR SAFETY</b>		P
<b>8.1</b>	<b>General</b>		P
	Manufacturers of secondary cells ensure that information is provided about current, voltage and temperature limits of their products		P
	Manufacturers of batteries ensure that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards		N/A
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		P
	As appropriate, any information relating to hazard avoidance resulting from a system analysis provided to the end user		N/A
	Do not allow children to replace batteries without adult supervision		N/A
<b>8.2</b>	<b>Small cell and battery safety information</b>		N/A
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N/A
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A
<b>9</b>	<b>MARKING</b>		P
<b>9.1</b>	<b>Cell marking</b>		NA
	Cells marked as specified in IEC 61960, except coin cells		NA

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
<b>9.2</b>	<b>Battery marking</b>		P
	Batteries marked as specified in IEC 61960, except for coin batteries	See marking plate for detail.	P
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity. Batteries also marked with an appropriate caution statement		N/A
	Terminals have clear polarity marking on the external surface of the battery		P
	Batteries with keyed external connectors designed for connection to specific end products need not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		N/A
<b>9.3</b>	<b>Caution for ingestion of small cells and batteries</b>		N/A
	Coin cells and batteries identified as small batteries according to 8.2 include a caution statement regarding the hazards of ingestion in accordance with 8.2		N/A
	When small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion given on the immediate package		N/A
<b>9.4</b>	<b>Other information</b>		P
	Storage and disposal instructions		P
	Recommended charging instructions		P
<b>10</b>	<b>PACKAGING AND TRANSPORT</b>		P
	Packaging for coin cells not small enough to fit within the limits of the ingestion gauge of Figure 3		N/A
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants		P
<b>ANNEX A</b>	<b>CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE</b>		N/A
<b>A.1</b>	<b>General</b>	Cells were certified according to IEC 62133-2: 2017	N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>A.2</b>	<b>Safety of lithium ion secondary battery</b>		N/A
<b>A.3</b>	<b>Consideration on charging voltage</b>		N/A
A.3.1	General		N/A
A.3.2	Upper limit charging voltage		N/A
A.3.2.1	General		N/A
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied		N/A
<b>A.4</b>	<b>Consideration of temperature and charging current</b>		N/A
A.4.1	General		N/A
A.4.2	Recommended temperature range		N/A
A.4.2.1	General		N/A
A.4.2.2	Safety consideration when a different recommended temperature range is applied		N/A
A.4.3	High temperature range		N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		N/A
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A
A.4.4	Low temperature range		N/A
A.4.4.1	General		N/A
A.4.4.2	Explanation of safety viewpoint		N/A
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		N/A
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		N/A
A.4.5	Scope of the application of charging current		N/A
A.4.6	Consideration of discharge		N/A
A.4.6.1	General		N/A
A.4.6.2	Final discharge voltage and explanation of safety viewpoint		N/A
A.4.6.3	Discharge current and temperature range		N/A
A.4.6.4	Scope of application of the discharging current		N/A
<b>A.5</b>	<b>Sample preparation</b>		N/A
A.5.1	General		N/A
A.5.2	Insertion procedure for nickel particle to generate internal short		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.5.3	Disassembly of charged cell		N/A
A.5.4	Shape of nickel particle		N/A
A.5.5	Insertion of nickel particle in cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle in winding core		N/A
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		N/A
A.5.6	Insertion of nickel particle in prismatic cell		N/A
<b>A.6</b>	<b>Experimental procedure of the forced internal short-circuit test</b>		N/A
A.6.1	Material and tools for preparation of nickel particle		N/A
A.6.2	Example of a nickel particle preparation procedure		N/A
A.6.3	Positioning (or placement) of a nickel particle		N/A
A.6.4	Damaged separator precaution		N/A
A.6.5	Caution for rewinding separator and electrode		N/A
A.6.6	Insulation film for preventing short-circuit		N/A
A.6.7	Caution when disassembling a cell		N/A
A.6.8	Protective equipment for safety		N/A
A.6.9	Caution in the case of fire during disassembling		N/A
A.6.10	Caution for the disassembling process and pressing the electrode core		N/A
A.6.11	Recommended specifications for the pressing device		N/A
<b>ANNEX B</b>	<b>RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS</b>		<b>P</b>
<b>ANNEX C</b>	<b>RECOMMENDATIONS TO THE END-USERS</b>		<b>N/A</b>
<b>ANNEX D</b>	<b>MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS</b>		<b>N/A</b>
<b>D.1</b>	<b>General</b>		<b>N/A</b>
<b>D.2</b>	<b>Method</b>		<b>N/A</b>
	A sample size of three coin cells is required for this measurement.....:		<b>N/A</b>
	Coin cells with an internal resistance of less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		<b>N/A</b>
	Coin cells with an internal resistance greater than 3 Ω require no further testing		<b>N/A</b>
<b>ANNEX E</b>	<b>PACKAGING AND TRANSPORT</b>		<b>P</b>
<b>ANNEX F</b>	<b>COMPONENT STANDARDS REFERENCES</b>		<b>P</b>

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE: Critical components information					P
Object / part No.	Manufacturer / trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>
Cell	Qixin Advanced Power Source Materials Co., Ltd.	ICR18650-2200mAh	3,7 V; 2200 mAh	IEC 62133-2:2017	TUV Rheinland (CB report No. 50264024002 CB cert. No. JPTUV-094969-A1)
PCB	KINGBOARD LAMINATES HOLDINGS LTD	KB-6150	V-0; 130°C, thickness:1,6 MM	UL 746	UL E123995
Fuse (F3)	Dongguan Better Electronics Technology Co., Ltd.	SMD128 Series	15 A; DC32 V	--	Tested with appliance
MOSFET (Q8)	Wuxi NCE Power Semiconductor Co., Ltd	NCE40H12K	120 A; 40 V	--	Tested with appliance
NTC	Shenzhen Fuwen sense technology Co., Ltd	FWBX10K3435T 100	10K-1%-3435B	--	Tested with appliance
Lead wire	ZHONGSHAN FUYUANTONG WIRE & CABLE CO LTD	1007	AWG24#, 22#, 20#, 18#, 16#; 80°C; 300V	UL 758	UL E241989
Alternative	DONGGUAN CHENG XING ELECTRONIC CO LTD	1007	AWG24#, 22#, 20#, 18#, 16#; 80°C; 300V	UL 758	UL E249743
Enclosure	NINGBO LG YONGXING CHEMICAL CO LTD	HI-121H	HB Thickness: 2,0 mm	UL 746	UL E203955

Supplementary information:  
<sup>1)</sup> Provided evidence ensures the agreed level of compliance. See OD-CB2039.

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.2.1	TABLE: Continuous charging at constant voltage (cells)				N/A
Sample no.	Recommended charging voltage V <sub>c</sub> (Vdc)	Recommended charging current I <sub>rec</sub> (A)	OCV before test (Vdc)	Results	
--	--	--	--	--	
<b>Supplementary information:</b> None					

7.3.1	TABLE: External short-circuit (cell)					N/A
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (K)	Results	
<b>Samples charged at charging temperature upper limit<sup>1)</sup></b>						
--	--	--	--	--	--	
<b>Samples charged at charging temperature lower limit<sup>2)</sup></b>						
--	--	--	--	--	--	
<b>Supplementary information:</b> None						

7.3.2	TABLE: External short-circuit (battery)						P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (K)	Component single fault condition	Results	
Pack (#4)	23,6	25,12	77	--*	Normal	Pass	
Pack (#5)	23,6	25,14	83	--*	SC Q8 pin S-D	Pass	
Pack (#6)	23,6	25,12	82	--*	SC Q8 pin S-D	Pass	
Pack (#7)	23,6	25,12	75	--*	SC Q8 pin S-D	Pass	
Pack (#8)	23,6	25,14	79	--*	SC F3	Pass	
<b>Supplementary information:</b>							
- No fire or explosion							
- *: Samples shut down immediately, and tested for 24 hours, no max. temperature was noted.							
- SC means short circuit							

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

<b>7.3.5</b>	<b>TABLE: Crush (cells)</b>			<b>N/A</b>
Sample no.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results
<b>Samples charged at charging temperature upper limit<sup>1)</sup></b>				
--	--	--	--	--
<b>Samples charged at charging temperature lower limit<sup>2)</sup></b>				
--	--	--	--	--
<b>Supplementary information: None</b>				

<b>7.3.6</b>	<b>TABLE: Over-charging of battery</b>			<b>P</b>
<b>Constant charging current (A).....:</b>		4		—
<b>Supply voltage (Vdc).....:</b>		30,6		—
Sample no.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results
Pack (#12)	18,70	73	35,4	Pass
Pack (#13)	18,68	75	35,8	Pass
Pack (#14)	18,69	75	35,8	Pass
Pack (#15)	18,68	76	35,6	Pass
Pack (#16)	18,73	75	35,4	Pass
<b>Supplementary information:</b>				
- No fire or explosion				
- Ambient temperature is <u>23,2</u> °C				
- Maximum charging current during the test is 4A.				

<b>7.3.7</b>	<b>TABLE: Forced discharge (cells)</b>			<b>N/A</b>
Sample no.	OCV before application of reverse charge (Vdc)	Measured reverse charge I <sub>t</sub> (A)	Lower limit discharge voltage (Vdc)	Results
--	--	--	--	--
<b>Supplementary information: None</b>				

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.8.1	TABLE: Vibration					P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
Pack (#17)	25,11	25,08	412,075	412,075	Pass	
Pack (#18)	25,10	25,08	410,934	410,908	Pass	
Pack (#19)	25,13	25,10	412,026	412,001	Pass	
<b>Supplementary information:</b>						
<ul style="list-style-type: none"> <li>- No fire or explosion</li> <li>- No rupture</li> <li>- No leakage</li> <li>- No venting</li> </ul>						



7.3.8.2	TABLE: Mechanical shock					P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
Pack (#20)	25,10	25,10	412,018	412,016	Pass	
Pack (#21)	25,12	25,12	412,103	412,100	Pass	
Pack (#22)	25,11	25,11	411,895	412,894	Pass	
<b>Supplementary information:</b>						
<ul style="list-style-type: none"> <li>- No fire or explosion</li> <li>- No rupture</li> <li>- No leakage</li> <li>- No venting</li> </ul>						



7.3.9	TABLE: Forced internal short circuit (cells)					N/A
Sample no.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location <sup>1)</sup>	Maximum applied pressure (N)	Results	
<b>Samples charged at charging temperature upper limit<sup>2)</sup></b>						
--	--	--	--	--	--	
<b>Samples charged at charging temperature lower limit<sup>3)</sup></b>						
--	--	--	--	--	--	
<b>Supplementary information: None</b>						



D.2	TABLE: Internal AC resistance for coin cells				N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results <sup>1)</sup>	
--	--	--	--	--	
<b>Supplementary information: None</b>					


Attachment 1: Photos



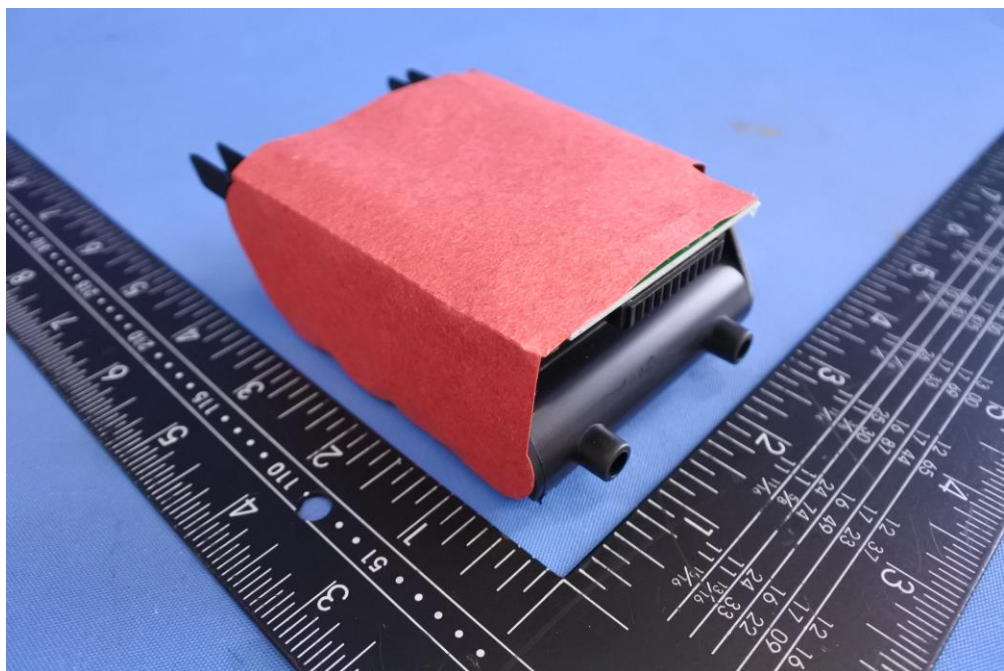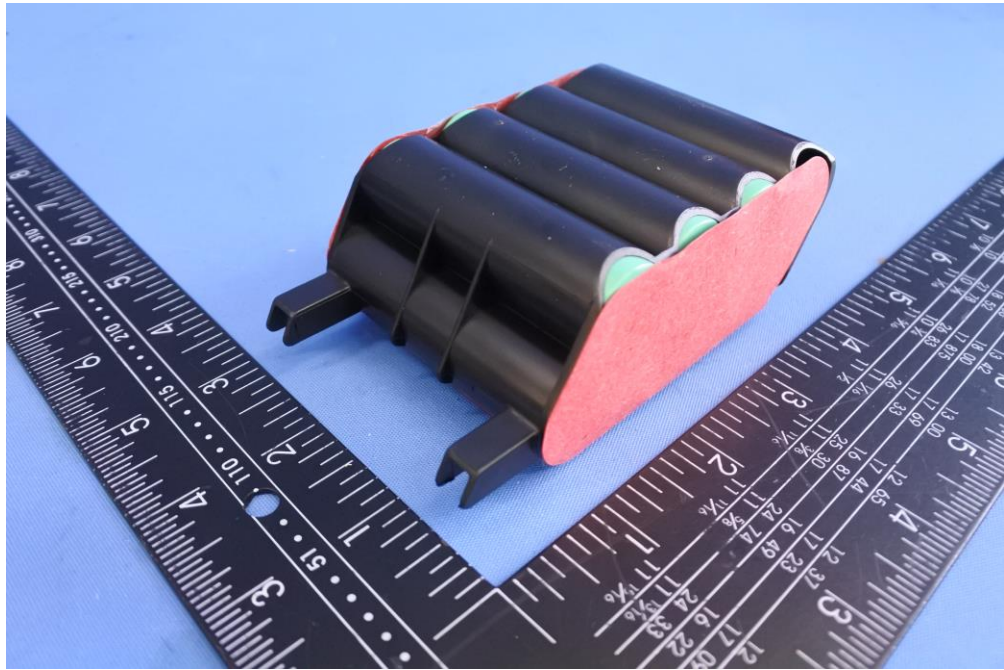

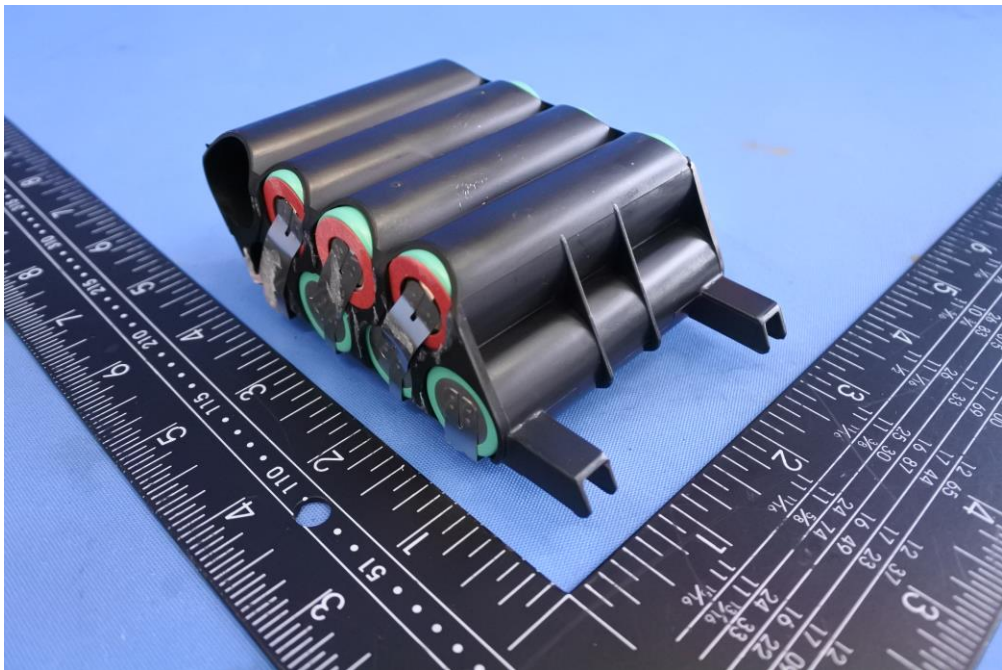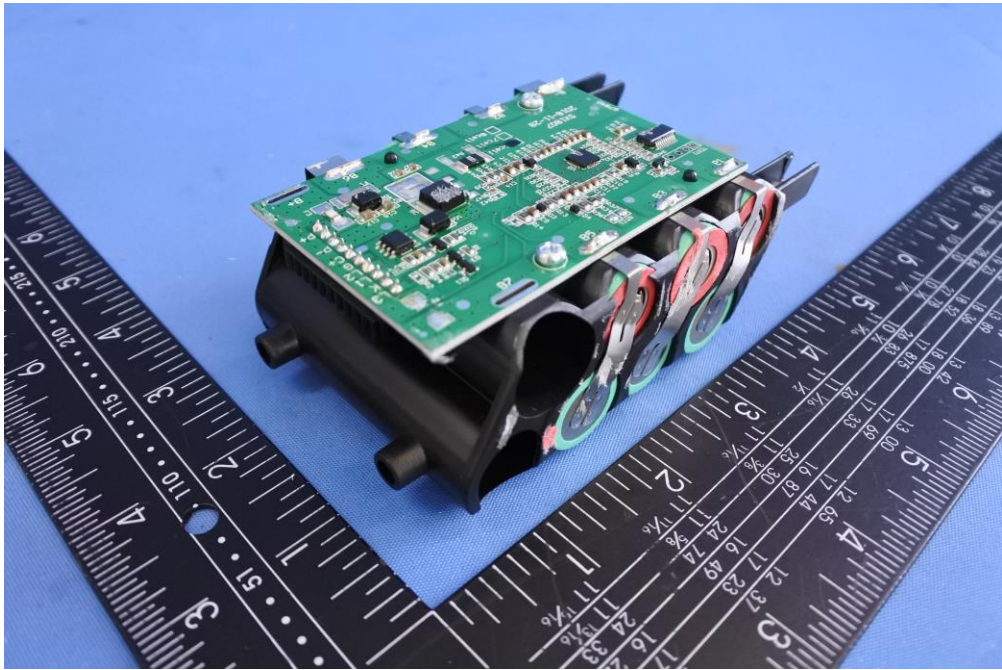

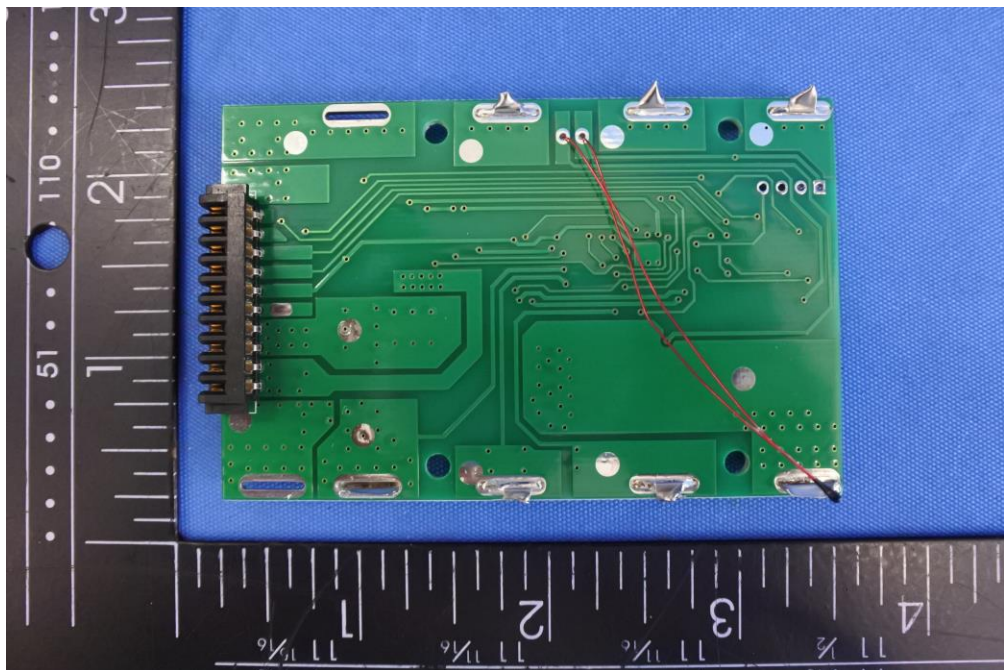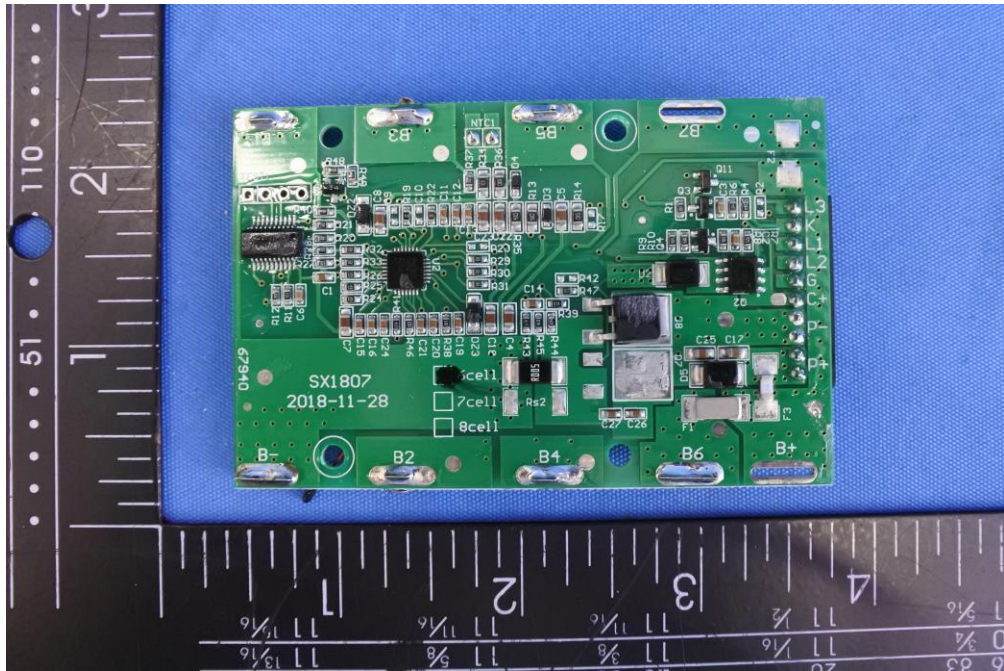

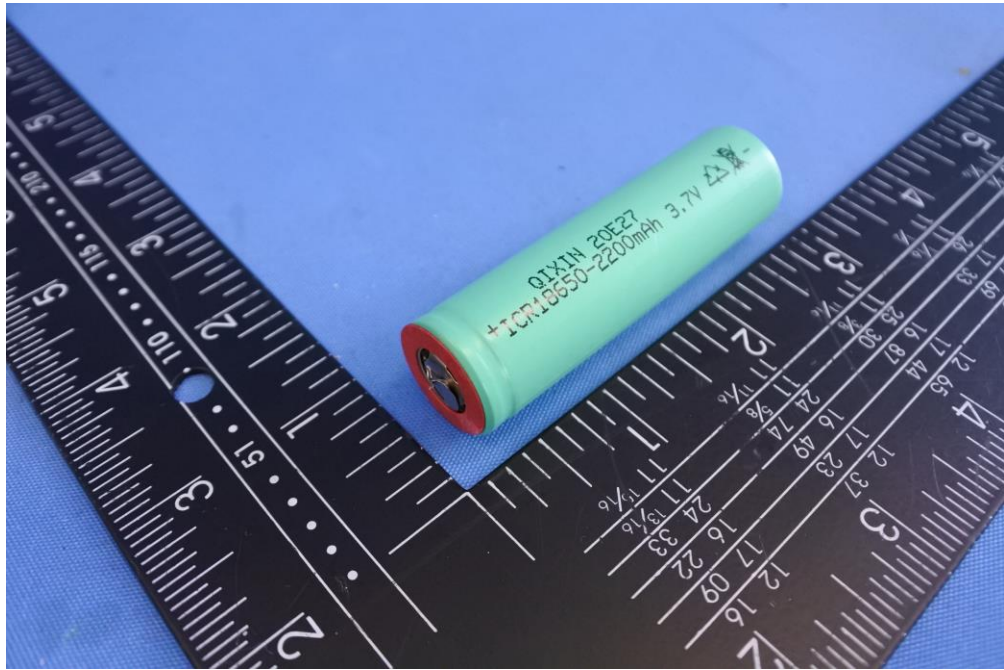

---End report---